



Taiwan

明緯企業股份有限公司
MEAN WELL ENTERPRISES CO., LTD.
24891 新北市五股區五權三路28號
No.28, Wuquan 3rd Rd., Wugu Dist.,
New Taipei City 24891, Taiwan (R.O.C.)
統一編號 : 34491075
Tel : +886-2-2299-6100(rep.)
Fax: +886-2-2299-6200(rep.)
+886-2-2298-0818(sales)
E-mail:info@meanwell.com
<http://www.meanwell.com>

U.S.A.

MEAN WELL USA, INC.
44030 Fremont Blvd., Fremont,
CA 94538, U.S.A.
Tel : +1-510-683-8886
Fax: +1-510-683-8899
E-mail:info@meanwellusa.com
<http://www.meanwellusa.com>

Europe

MEAN WELL EUROPE B.V.
Langs de Werf 8, 1185XT Amstelveen,
The Netherlands
Tel : +31-20-758-6000
Fax: +31-20-758-6001
E-mail:info@meanwell.eu
<http://www.meanwell.eu>


China

明緯(廣州)電子有限公司
MEAN WELL (GUANGZHOU) ELECTRONICS CO., LTD.
廣州市天河區東圃鎮黃村大道譽安工業園A棟2樓
2nd Floor, No.A Building, Yuean Ind. Park,
Dongpu Town, Tianhe District, Guangzhou, China
Post Code: 510660
Tel : +86-20-2887-1200 400-020-1200 (免付費電話)
Fax: +86-20-8201-0507
E-mail:info@meanwell.com.cn
<http://www.meanwell.com.cn>

蘇州明緯科技有限公司

SUZHOU MEAN WELL TECHNOLOGY CO., LTD.
江蘇省蘇州市相城區黃埭鎮潘陽工業園東橋健民路77號
No.77, Jian-Ming Rd. Dong-Qiao,
Pan-Yang Ind. Park, Huang-Dai Town,
Xiang-Cheng District, Suzhou, Jiang-Su, China
Post Code: 215152
Tel : +86-512-6508-8600
Fax: +86-512-6508-8700
E-mail:info@meanwell.cc
<http://www.meanwell.cc>

Please Contact Your Local Distributor



www.meanwell.com



2012
October



Your Reliable Power Partner

Standard Switching Power Supply Manufacturer

Introduction



Celebrate The Past,
Pioneer The Future



MEAN WELL 30th Anniversary in 2012

Established in 1982, MEAN WELL is going to celebrate its 30th anniversary in 2012. During the past 30 years, our slogan "your reliable power partner" has been curved into the minds of all MEAN WELL employees and put into effect thoroughly between MEAN WELL and our valuable customers. Sure-footedly nurtured the core competency of P, Q, C, D, S, R (Product, Quality, Cost, Delivery, Service, and Reliable Relationship), we made every effort to accomplish the one stop shopping environment with the most complete standard power product lines.

In these 2 years, we acquired "Taiwan Superior Brand" and "Taiwan Excellence Product Award" from the Taiwan government. The awards not only represent the identification of our previous efforts on brand-building and product design, but also prove that MEAN WELL proceeds toward the right direction to continuously develop "green power products" with energy-saving concept. We are sure that this strategy will be kept in the coming years.



We are also proud of taking social responsibility and devote ourselves to the balance of "Technology, Humanity, and Environmental Consciousness". This vision will be continued and implemented into our corporate strategy and daily operation. Rely on the cooperation of our distributors, suppliers, and employees, as well as the support of worldwide customers, we believe that MEAN WELL will become stronger and achieve another level of enterprise in the next 30 years. MEAN WELL is ready to work with you and always be your best reliable power partner!!



INDEX




■ Enclosed Switching Power Supply		
G3 Series	RS-15 / 25 / 35 / 50 / 75 / 100 / 150 RD-35 / 50 / 65 / 85 / 125 RID-50 / 65 / 85 / 125, RT-50 / 65 / 85 / 125 RQ-50 / 65 / 85 / 125	2~3
NE Series	NES-15 / 25 / 35 / 50 / 75 / 100 / 150 NED-35 / 50 / 75 / 100, NET-35 / 50 / 75 NES-200, NES-350	4~5
SE Series	SE-200, SE-350, SE-450 SE-600, SE-1000, SE-1500	6 MSP-450 7
PFC Series	SP-75, SP-100, SP-150, SP-200, SP-240 SP-320, SP-480, PSP-600, SP-750 RSP-200, RSP-320, RSP-750, RSP-1000 RSP-1500, RSP-2000, RSP-2400, RSP-3000 TP-75, TP-100, QP-100, TP-150, QP-150, QP-200, QP-320, QP-375 HRP-75, HRP-100, HRP[G]-150, HRP[G]-200 HRP[G]-300, HRP[G]-450, HRP[G]-600 MSP-100, MSP-200, MSP-300 SPV-150, SPV-300, SPV-1500 HSP-150, HSP-250, HDP-190, HDP-240	8 9 10 11 12~13 14 15 16 17 18
U-bracket	USP-150, USP-225, USP-350, USP-500	19
Modular Series	MP450, MP650, MP1K0 MS-75 / 150 / 300, MD-100	20~21
Harsh Environment	HLG-40H, HLG-60H HLG-80H, HLG-100H, HLG-120H HLG-150H, HLG-185H, HLG-240H HLG-320H	22 23 24 25
DIN Series	MDR-10 / 20 / 40 / 60 / 100 DR-15, DR-30, DR-60, DR-100 DR-45, DR-75, DR-120, DRP-240, DRP-480, DRP-480S DRH-120, DRT-240/480/960 GSM18/25/36 SDR-120, SDR-240, SDR-480[P], SDR-960 WDR-120, WDR-240, WDR-480 TDR-960 , DR-RDN20, DR-UPS40	26 27 28 29 30 31 32
■ Open Frame Switching Power Supply		
Medical Type	PM-05, PM-10, PM-15, PM-20 NFM-05, NFM-10, NFM-15, NFM-20 MPS-30, MPS / D / T-45 RPS-60, RPD-60, RPT-60 MPS-65, MPD-65, MPT-65 RPS-75, RPD-75, RPT-75, RPS[G]-160, RPD[G]-160, RPT[G]-160 MPS-200, MPD-200, MPT-200, MPQ-200 RPS-300	33 34 35 36 37 38
General Type	PS-05, PS-15, PS-25, PD-25 PS-35, PS-45, PD-45, PT-45 GSM40/60 PT-4503 / 6503, PS / PD / PT-65 RPD-65-[C], RPT-65-[C], PD-110, PQ-100 PPQ-100, PPS-125, PPT-125 ASP-150, PPS-200, PID-250 LPS-50 / 75 / 100, LPP-100 / 150 EPS-15, EPS-25/35, EPS-45-[C], EPS-65-[C] ELP-75-[C], EPP-100, EPP-150, EPP-300	39 40 41 42 43 44 45 46 47
■ External Switching Power Supply		
Charger	PA-120, PB-120 ESC/P-120, ESC/P-240, PB-230, PB-300[P] PB-360[P] / 600 / 1000 2/3/8 Stage Charging GC30B/U/E, GC120 / 160 / 220, GC330	48 49 50 51

■ External Switching Power Supply										
Green Adaptor	GE12, GE18, GE24, Interchangeable AC Inlet Plug GS05E-USB , GS05U-USB GS06E/U, GS12E/U, GS15A/B/E/U GS18A, GS18B, GS18E, GS18U, GS25A, GS25B, GS25E, GS25U, GS36E, GS36U GS40, GS60, GS90, GS120 GS160, GS220, GS280	52 53 54 55 56								
General Adaptor	P25A, P25B, P50A Optional DC Plug List	57								
Medical Adaptor	MES30A, MES30B, MES30C MES50A	58								
■ Specific Purpose Power Supply										
Security Series	SCP-35, SCP-50, SCP-75, PSC-60-[C], PSC-100-[C] ADS-55, ADS-155, AD-55, AD-155, ADD-55, ADD-155	59 60								
ATX Power	IPC-200, IPC-250, IPC-300A, IPC-300B YP-350A, YP-400A, YP-450A, YP-350J	61								
■ DC/DC Converter										
Module Type	SRS, SUS01 SBT01, SFT01, DET01 SPR01, SMU01, SMA01 SPU02, SPU03 , SPA02, SPB03 SCW03, DCW03, SCW05, DCW05 SLW05, DLW05, SCW08, DCW08 SKE10, DKE10, SCW12, DCW12 SKM15, SKA15, DKA15 SKE15, DKE15, SKA20 SKM30 , SDM30 DKA30, TKA30, SKA40, SKA60 MHB75, MHB100 Heat Sink for MHB Series MHB150	62 63 64 65 66 67 68 69 70 71 72 73 74								
On Board Type	NSD05 NSD10-S, NSD10-D, NSD15-S, NSD15-D NID30, NID60	74 75 76								
PCB Type	PSD-05, PSD-15 PSD-30, PSD-45	76 77								
Enclosed Type	SD-15, SD-25 SD-50, SD-100, SD-150, SD-200 SD-350, SD-500, SD-1000 GSM90 RSD-100, RSD-150, RSD-200, RSD-300	77 78 79 80								
19" Rack Power	RCP-1000, RCP-1U[], RCP-MU, RCP-2000, RKP-1U[], RKP-CMU1, RKP-1U[]-CMU1	81								
LED Series	Introduction of LED Power Family	82								
Inverter Series	Introduction of Inverter Family	83								
■ Accessories / Case Drawing										
Case Drawing	Case 901 / 902 / 903 / 905 / 906 / 907 Case 910A / 912 / 915A / 916(A/B) / 919A / 920A Case 926A / 927A / 928A / 929A / 931A / 932A Case 935A / 939A / 940A / 941B / 943A / 946A Case 952B / 963A / 971A / 977A / 978A / 980A Case 986A / 987A / 988 / 995A / 996A / 998A Case 999A / 203A / 205A / 206A / 207A / 208A Case 956 / 962A / 973A / 992A / 979A / 984A DRL-01 / 02 / 03 / 03A, DRP-01 / 02 / 03	84 85 86 87 88 89 90 91 92								
Accessories	MHS012 / 013 / 014 / 025 / 026 / 027 TBC05 / 07 / 08									
<table border="1"> <tbody> <tr> <td style="background-color: #FFFF00;"> </td> <td>: New Announced</td> </tr> <tr> <td style="background-color: #FFCC00;"> </td> <td>: New Product within 1 Year</td> </tr> <tr> <td style="background-color: #008000;"> </td> <td>: Under Development</td> </tr> <tr> <td style="background-color: #006400;"> </td> <td>: Supplementary Information</td> </tr> </tbody> </table>				: New Announced		: New Product within 1 Year		: Under Development		: Supplementary Information
	: New Announced									
	: New Product within 1 Year									
	: Under Development									
	: Supplementary Information									

Enclosed-G3 Series

High Reliability Miniature

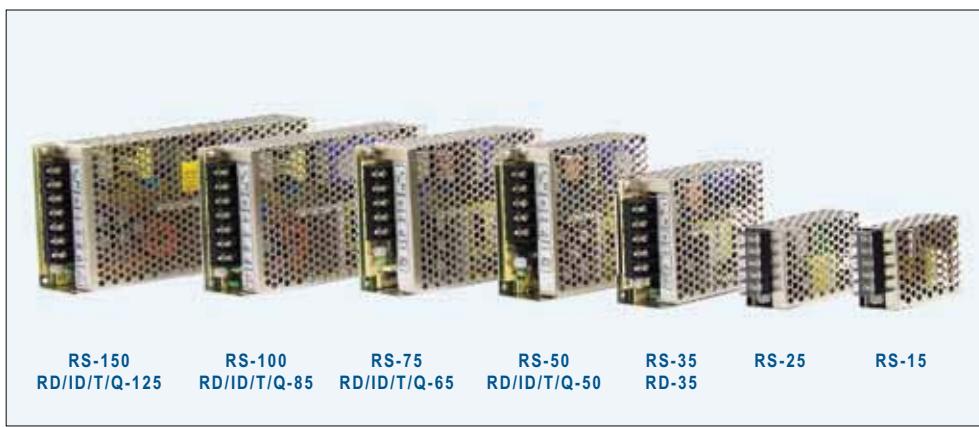

■ Features

- No load power consumption <0.5W (RS-15~75)
- All using 105°C long life electrolytic capacitors
- Protections: Short circuit / Overload / Over voltage / Over Temp.(RS-15)
- Meet EMS EN50082-2/EN61000-6-2 heavy industry level (35~150W)
- Withstand 300VAC surge input for 5 sec.
- High operating temperature up to 70°C
- Withstand 5G vibration test
- Miniature size, high power density
- High efficiency, long life and high reliability
- LED indicator for power on
- 100% full load burn-in test
- Suitable for critical applications
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	RS-15	RS-25	RS-35 RD-35	RS-50 RD / ID / T / Q-50	RS-75 RD / ID / T / Q-65	RS-100 RD / ID / T / Q-85	RS-150 RD / ID / T / Q-125
AC input voltage range	85~264VAC, 120~370VDC	88~264VAC, 125~373VDC					115 / 230VAC by switch
AC inrush current (max.)	Cold start, 65A at 230VAC	30A at 230VAC	36A at 230VAC	33A at 230VAC	40A at 230VAC		
DC adjustment range	±10% by potentiometer for single output; CH1 -5%~+10% by potentiometer for multiple output						
Overload protection	>105%, hiccup mode	110%~180%	110%~150% hiccup mode, auto-recovery (150% ~190% for RID-125-1205/2405)				
Over voltage protection	115%~135%, shut off	115%~135% rated output voltage, hiccup mode, auto-recovery					
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute						
Working temperature	-20°C~+70°C	-25°C~+70°C (refer to the derating curve for different models)					
Vibration	10~500Hz, 5G 10min. /1 cycle, period for 60 min. each along X, Y, Z axes						
Safety standards	UL60950-1, TUV EN60950-1 approved						
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 (EN50082-2) (35~150W)						
Connection	Terminal block for input and output						
Dimension (LxWxH)(mm)	62.5x 51x 28	78x 51x 28	99x 82x 36	99x 97x 36	129x 97x 38	159x 97x 38	199x 98x 38
Case No.	971A	931A	932A	905B	903	901C	902A
Packing	108pcs /15.0kg	60pcs /13.0kg	45pcs /14.0kg	45pcs /19.5kg	30pcs /13.3kg	24pcs /15.4kg	20pcs /15kg

■ 15W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-15-3.3	3.3V, 0~3.0A	±3%	80mV	72%
RS-15-5	5V, 0~3.0A	±2%	80mV	77%
RS-15-12	12V, 0~1.3A	±1%	120mV	81%
RS-15-15	15V, 0~1.0A	±1%	120mV	81%
RS-15-24	24V, 0~0.625A	±1%	200mV	82%
RS-15-48	48V, 0~0.313A	±1%	200mV	82%

RS-50-15	15V, 0~3.4A	±1%	120mV	86.0%
RS-50-24	24V, 0~2.2A	±1%	120mV	88.0%
RS-50-48	48V, 0~1.1A	±1%	200mV	89.0%

■ 25W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-25-3.3	3.3V, 0~6.0A	±3%	80mV	73.5%
RS-25-5	5V, 0~5.0A	±2%	80mV	78.5%
RS-25-12	12V, 0~2.1A	±1%	120mV	81.5%
RS-25-15	15V, 0~1.7A	±1%	120mV	83.5%
RS-25-24	24V, 0~1.1A	±1%	120mV	86.0%
RS-25-48	48V, 0~0.57A	±1%	200mV	85.0%

RS-75-3.3	3.3V, 0~15A	±3%	80mV	75.0%
RS-75-5	5V, 0~12A	±2%	80mV	79.0%
RS-75-12	12V, 0~6.0A	±1%	120mV	84.5%
RS-75-15	15V, 0~5.0A	±1%	120mV	86.0%
RS-75-24	24V, 0~3.2A	±1%	120mV	88.5%
RS-75-48	48V, 0~1.6A	±1%	200mV	89.5%

■ 35W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-35-3.3	3.3V, 0~7.0A	±3%	80mV	76.5%
RS-35-5	5V, 0~7.0A	±2%	80mV	80.5%
RS-35-12	12V, 0~3.0A	±1%	120mV	84.5%
RS-35-15	15V, 0~2.4A	±1%	120mV	86.0%
RS-35-24	24V, 0~1.5A	±1%	120mV	88.0%
RS-35-48	48V, 0~0.8A	±1%	200mV	88.5%

■ 100W — Single Output

RS-100-3.3	3.3V, 0~20A	±3%	80mV	74%
RS-100-5	5V, 0~16A	±2%	80mV	77%
RS-100-12	12V, 0~8.5A	±1%	120mV	81%
RS-100-15	15V, 0~7.0A	±1%	120mV	82%
RS-100-24	24V, 0~4.5A	±1%	120mV	84%
RS-100-48	48V, 0~2.3A	±1%	200mV	84%

■ 150W — Single Output

RS-150-3.3	3.3V, 0~30A	±3%	80mV	74%
RS-150-5	5V, 0~26A	±2%	80mV	78%
RS-150-12	12V, 0~12.5A	±1%	120mV	83%
RS-150-15	15V, 0~10A	±1%	120mV	84%
RS-150-24	24V, 0~6.5A	±1%	120mV	86%
RS-150-48	48V, 0~3.3A	±1%	200mV	87%

■ 50W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-50-3.3	3.3V, 0~10A	±3%	80mV	78.0%
RS-50-5	5V, 0~10A	±2%	80mV	83.0%
RS-50-12	12V, 0~4.2A	±1%	120mV	84.5%

Enclosed-G3 Series



35W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-35A	5V, 0.3~4.0A	±2%	80mV	79%	32W
	12V, 0.2~1.0A	±6%	120mV		
RD-35B	5V, 0.3~4.0A	±2%	80mV	82%	35W
	24V, 0.2~1.3A	±5%	120mV		
RD-3513	13.5V, 0.3~2.0A	±4%	120mV	80%	35W
	-13.5V, 0.2~0.57A	±4%	120mV		

50W — Quad Output (RT-50 without -5V or -12V output)

Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-50B	5V, 0.5~6.0A	±2%	80mV	74%	46W
	12V, 0.2~1.5A	±6%	120mV		
	-5V, 0.0~1.0A	±2%	100mV		
	-12V, 0.0~1.0A	±2%	80mV		
RQ-50C	5V, 0.5~6.0A	±2%	80mV	75%	50W
	15V, 0.2~1.5A	±6%	120mV		
	-5V, 0.0~1.0A	±2%	100mV		
	-15V, 0.0~1.0A	±2%	80mV		
RQ-50D	5V, 0.5~6.0A	±6%	80mV	79%	53W
	12V, 0.2~1.5A	±6%	120mV		
	24V, 0.1~1.0A	+7%, -5%	180mV		
	-12V, 0.0~1.0A	±2%	80mV		

50W — Dual Output (Output isolated for RID-50A/B)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-50A	5V, 0.3~6.0A	±2%	80mV	79%	54W
	12V, 0.3~3.0A	±7%	120mV		
RD-50B	5V, 0.3~6.0A	±2%	80mV	80%	54W
	24V, 0.2~2.0A	+8%, -4%	120mV		

65W — Dual Output (Output isolated for RID-65A/B)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-65A	5V, 0.3~8.0A	±2%	80mV	79%	66W
	12V, 0.2~4.0A	±6%	120mV		
RD-65B	5V, 0.3~8.0A	±2%	80mV	78%	68W
	24V, 0.2~3.0A	+4%, -6%	150mV		

85W — Dual Output (Output isolated for RID-85A/B)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-85A	5V, 2.0~10A	±2%	80mV	78%	88W
	12V, 0.3~5.0A	±5%	120mV		
RD-85B	5V, 2.0~10A	±2%	80mV	80%	88W
	24V, 0.3~2.5A	±5%	120mV		

125W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-125A	5V, 2.0~15A	±5%	80mV	82%	131W
	12V, 0.5~10A	±7%	120mV		
RD-125B	5V, 2.0~10A	±5%	80mV	85%	133W
	24V, 0.4~5.0A	±7%	120mV		

125W — Dual Output (Output isolated for RID-125)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-125-1224	12V, 1.0~7.0A	±2%	120mV	85%	133W
	24V, 0.4~5.0A	+8%, -5%	200mV		
*RD-125-2412	24V, 0.5~5.0A	±2%	200mV	85%	133W
	12V, 1.0~7.0A	±10%	120mV		
RD-125-1248	12V, 1.0~7.0A	±2%	120mV	86%	138W
	48V, 0.2~2.5A	+8%, -5%	240mV		
*RD-125-4812	48V, 0.3~2.5A	±2%	240mV	86%	138W
	12V, 1.0~7.0A	±10%	120mV		
RD-125-2448	24V, 0.5~4.0A	±1%	200mV	86%	144W
	48V, 0.2~2.5A	±4%	240mV		
*RD-125-4824	48V, 0.3~2.5A	±1%	240mV	86%	144W
	24V, 0.5~4.0A	±8%	240mV		
RID-125-1205	12V, 2.0~10.5A	±2%	120mV	80%	125W
	5V, 0.0~3.0A	±3%	80mV		
RID-125-2405	24V, 2.0~5.3A	±2%	120mV	83%	125W
	5V, 0.0~3.0A	±3%	80mV		

*Modified

65W — Quad Output (RT-65 without -5V or -12V output)

Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-65B	5V, 0.5~8.0A	±2%	80mV	76%	63W
	12V, 0.2~3.0A	+7%, -5%	120mV		
	-5V, 0.0~1.0A	±5%	80mV		
	-12V, 0.0~1.0A	±5%	80mV		
RQ-65C	5V, 0.5~8.0A	±2%	80mV	76%	65W
	15V, 0.2~3.0A	+8%, -4%	120mV		
	-5V, 0.0~1.0A	±5%	80mV		
	-15V, 0.0~1.0A	±5%	80mV		
RQ-65D	5V, 0.5~8.0A	±2%	80mV	78%	68W
	12V, 0.2~3.0A	±6%	120mV		
	24V, 0.1~1.5A	±8%	180mV		
	-12V, 0.0~1.0A	±5%	80mV		

85W — Quad Output (RT-85 without -5V or -12V output)


Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-85B	5V, 2.0~10A	±2%	80mV	76%	81W
	12V, 0.3~4.0A	+7%, -3%	120mV		
	-5V, 0.0~1.0A	±8%	100mV		
	-12V, 0.0~1.0A	±5%	80mV		
RQ-85C	5V, 2.0~10A	±2%	80mV	77%	83W
	15V, 0.3~4.0A	+3%, -7%	120mV		
	-5V, 0.0~1.0A	±8%	100mV		
	-15V, 0.0~1.0A	±5%	80mV		
RQ-85D	5V, 2.0~10A	±2%	80mV	78%	84W
	12V, 0.3~4.0A	+7%, -3%	120mV		
	24V, 0.1~1.5A	±8%	150mV		
	-12V, 0.0~1.0A	±5%	80mV		

125W — Quad Output (RT-125 without -5V or -12V output)

Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-125B	5V, 2.0~12A	±2%	80mV	79%	120W
	12V, 0.5~4.5A	+8%, -3%	120mV		
	-5V, 0.1~1.0A	+6%, -10%	80mV		
	-12V, 0.0~1.0A	±5%	80mV		
RQ-125C	5V, 2.0~12A	±2%	80mV	80%	123W
	15V, 0.5~4.0A	+8%, -3%	120mV		
	-5V, 0.1~1.0A	+6%, -10%	80mV		
	-15V, 0.0~1.0A	±5%	80mV		
RQ-125D	5V, 2.0~12A	±2%	80mV	82%	124W
	12V, 0.5~4.0A	+8%, -3%	120mV		
	24V, 0.1~2.5A	±8%	150mV		
	-12V, 0.0~1.0A	±5%	80mV		

Enclosed-NE Series

15~350W Miniature

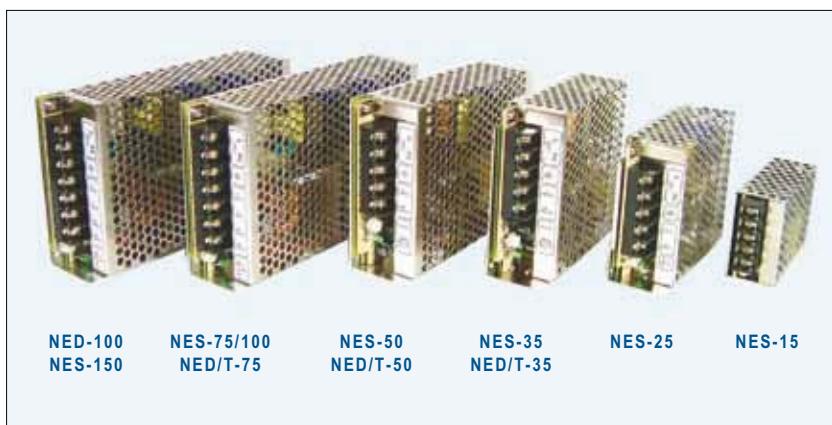

Features

- Universal AC input / Full range (NES/D-100, NES-150 AC input selectable by switch)
- Protections: Short circuit / Overload / Over voltage
- Built-in over temperature protection for NES-15
- Cooling by free air convection
- Small size, high power density
- Low cost, high reliability
- 100% full load burn-in test
- Most economical low wattage solution with safety certificates
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	NES-15	NES-25	NES-35 NED/T-35	NES-50 NED/T-50	NES-75 NED/T-75	NES-100	NES-150 NED-100
AC input voltage range	85~264VAC, 120~370VDC					115/230VAC by switch	
AC inrush current (max.)	Cold start, 45A at 230VAC					36A at 230VAC	45A at 230VAC
DC adjustment range	±10% by potentiometer for single output; CH1 -5%~+10% by potentiometer for multiple output					-5%~+10% (NES-100/150) CH1 -5%~+10% (NED-100)	
Overload protection	>105%	110%~150% hiccup mode, auto-recovery					
Over voltage protection	115%~135% rated output voltage, shut off					115%~135% hiccup mode, auto-recovery	
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute						
Working temperature	-20~+60°C (refer to the derating curve for different models)						
Vibration	10~500Hz, 2G 10min. /1 cycle, period for 60 min. each along X, Y, Z axes						
Safety standards	UL60950-1, EN60950-1(NES-150 only), GB4943(NES only) approved, also design refer to TUV EN60950-1						
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, GB9254(NES only)						
Connection	Terminal block for input and output						
Dimension (LxWxH)(mm)	78x 51x 28	99x 82x 35	99x 97x 36	129x 98x 38	159x 97x 38	159x 97x 38	199x 98x 38
Case No.	931A	932B	905	903	901	901	902
Packing	60pcs/11.8kg	45pcs/14.5kg	45pcs/17.2kg	45pcs/21kg	30pcs/16.6kg	30pcs/17.5kg	20pcs/15kg

15W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-15-5	5V, 0~3.0A	±2%	150mV	79%
NES-15-12	12V, 0~1.3A	±1%	150mV	81%
NES-15-15	15V, 0~1.0A	±1%	150mV	81%
NES-15-24	24V, 0~0.7A	±1%	200mV	85%
NES-15-48	48V, 0~0.35A	±1%	240mV	82%

75W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-75-5	5V, 0~14A	±2%	80mV	77%
NES-75-12	12V, 0~6.2A	±1%	120mV	82%
NES-75-15	15V, 0~5.0A	±1%	150mV	83%
NES-75-24	24V, 0~3.2A	±1%	200mV	86%
NES-75-48	48V, 0~1.6A	±1%	240mV	87%

25W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-25-5	5V, 0~5.0A	±2%	80mV	78%
NES-25-12	12V, 0~2.1A	±1%	120mV	83%
NES-25-15	15V, 0~1.7A	±1%	150mV	84%
NES-25-24	24V, 0~1.1A	±1%	200mV	86%
NES-25-48	48V, 0~0.57A	±1%	240mV	86%

100W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-100-5	5V, 0~20A	±2%	80mV	80%
NES-100-7.5	7.5V, 0~13.6A	±1%	120mV	81%
NES-100-9	9V, 0~11.2A	±1%	120mV	81%
NES-100-12	12V, 0~8.5A	±1%	120mV	83%
NES-100-15	15V, 0~7.0A	±1%	120mV	84%
NES-100-24	24V, 0~4.5A	±1%	120mV	86%
NES-100-48	48V, 0~2.3A	±1%	150mV	86%

35W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-35-5	5V, 0~7.0A	±2%	80mV	78%
NES-35-12	12V, 0~3.0A	±1%	120mV	81%
NES-35-15	15V, 0~2.4A	±1%	150mV	83%
NES-35-24	24V, 0~1.5A	±1%	200mV	85%
NES-35-48	48V, 0~0.8A	±1%	240mV	86%

150W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-150-3.3	3.3V, 0~30A	±3%	80mV	73%
NES-150-5	5V, 0~26A	±2%	80mV	78%
NES-150-7.5	7.5V, 0~20A	±1%	120mV	80%
NES-150-9	9V, 0~16.7A	±1%	120mV	83%
NES-150-12	12V, 0~12.5A	±1%	120mV	83%
NES-150-15	15V, 0~10A	±1%	120mV	83%
NES-150-24	24V, 0~6.5A	±1%	120mV	86%
NES-150-48	48V, 0~3.3A	±1%	200mV	86%

50W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-50-5	5V, 0~10A	±2%	80mV	79%
NES-50-12	12V, 0~4.2A	±1%	120mV	82%
NES-50-15	15V, 0~3.4A	±1%	150mV	83%
NES-50-24	24V, 0~2.2A	±1%	200mV	86%
NES-50-48	48V, 0~1.1A	±1%	240mV	87%

Enclosed-NE Series

35W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-35A	5V, 0.5~5.0A	±2%	80mV	78%	32W
	12V, 0.1~1.5A	±6%	120mV		
NED-35B	5V, 0.5~4.0A	±2%	80mV	81%	35W
	24V, 0.2~1.3A	±6%	200mV		

50W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-50A	5V, 1.0~6.0A	±2%	80mV	79%	54W
	12V, 0.3~3.0A	±6%	120mV		
NED-50B	5V, 1.0~6.0A	±2%	80mV	82%	54W
	24V, 0.2~2.0A	±6%	200mV		

75W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-75A	5V, 1.0~8.0A	±2%	80mV	78%	71W
	12V, 0.3~4.0A	±6%	120mV		
NED-75B	5V, 1.0~6.0A	±2%	80mV	81%	73W
	24V, 0.2~3.0A	±6%	200mV		

100W — Dual Output (Output isolated for NED-100 [GD])

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-100A	5V, 2~10A	±2%	80mV	80%	100W
	12V, 0.7~7.0A	±10%	120mV		
NED-100B	5V, 1~10A	±2%	80mV	82%	100W
	24V, 0.3~3.5A	±8%	200mV		
NED-100C	12V, 0~8.0A	±2%	120mV	80%	99W
	5V, 0~3.0A	±3%	80mV		
NED-100D	24V, 0~4.0A	±2%	120mV	82%	99W
	5V, 0~3.0A	±3%	80mV		

35W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NET-35A	5V, 0.5~4.0A	±2%	80mV	78%	30W
	12V, 0.1~1.5A	±6%	120mV		
	-5V, 0.1~0.5A	±6%	120mV		
NET-35B	5V, 0.5~4.0A	±2%	80mV	79%	33W
	12V, 0.1~1.5A	±6%	120mV		
	-12V, 0.1~0.5A	±6%	120mV		
NET-35C	5V, 0.5~3.5A	±2%	80mV	79%	35W
	15V, 0.1~1.5A	±8%	150mV		
	-15V, 0.1~0.5A	±8%	150mV		
NET-35D	5V, 0.5~3.5A	±2%	80mV	79%	37W
	24V, 0.1~1.0A	±8%	200mV		
	12V, 0.1~1.0A	±8%	120mV		

50W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NET-50A	5V, 0.6~5.0A	±2%	80mV	76%	47W
	12V, 0.2~2.5A	±6%	120mV		
	-5V, 0.1~0.7A	±5%	120mV		
NET-50B	5V, 0.6~5.0A	±2%	80mV	78%	50W
	12V, 0.2~2.5A	±6%	120mV		
	-12V, 0.1~0.7A	±5%	120mV		
NET-50C	5V, 0.6~5.0A	±2%	80mV	78%	50W
	15V, 0.1~2.0A	±8%	150mV		
	-15V, 0.1~0.7A	±5%	150mV		
NET-50D	5V, 0.6~5.0A	±2%	80mV	80%	51W
	24V, 0.1~1.5A	±8%	200mV		
	12V, 0.1~1.5A	±6%	120mV		

75W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NET-75A	5V, 0.6~7.0A	±2%	80mV	77%	69W
	12V, 0.2~3.5A	±6%	120mV		
	-5V, 0.1~0.7A	±5%	120mV		
NET-75B	5V, 0.6~7.0A	±2%	80mV	78%	65W
	12V, 0.2~3.5A	±6%	120mV		
	-12V, 0.1~0.7A	±5%	120mV		
NET-75C	5V, 0.6~7.0A	±2%	80mV	78%	72W
	15V, 0.1~3.5A	±8%	150mV		
	-15V, 0.1~0.7A	±5%	150mV		
NET-75D	5V, 0.6~6.0A	±2%	80mV	80%	73W
	24V, 0.1~2.0A	±8%	200mV		
	12V, 0.1~1.5A	±6%	120mV		

210W Single Output Switching Power Supply



- AC input selectable by switch
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload Over voltage / Over temp.
- Cooling by free air convection
- Built-in constant current limiting circuit
- 100% full load burn-in test
- LED indicator for power on
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch
DC adjustment range ±10% rated output range
Overload protection 105%~150% constant current limiting, auto-recovery
Over voltage protection 115%~145% rated output voltage
Setup, rise, hold up time 1000ms, 50ms, 20ms at full load and 230VAC
Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
Working temperature -20°C~+50°C (refer to output derating curve)
Safety standards UL60950-1 approved
Packing 0.93kg ; 12pcs / 12kg / 0.92CUFT

Model No.	Output	Tol.	R&N	Effi.
NES-200-3.3	3.3V, 0~40A	±2%	150mV	75%
NES-200-5	5V, 0~40A	±2%	150mV	79%
NES-200-7.5	7.5V, 0~27A	±2%	150mV	82%
NES-200-12	12V, 0~17A	±1%	150mV	85%
NES-200-15	15V, 0~14A	±1%	150mV	85%
NES-200-24	24V, 0~8.8A	±1%	150mV	87%
NES-200-27	27V, 0~7.8A	±1%	200mV	88%
NES-200-36	36V, 0~5.9A	±1%	240mV	89%
NES-200-48	48V, 0~4.4A	±1%	240mV	89%

350W Single Output Switching Power Supply



- AC input selectable by switch
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- Built-in fan ON/OFF control
- Built-in constant current limiting circuit
- 100% full load burn-in test
- LED indicator for power on
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch
DC adjustment range ±10% rated output range
Overload protection 105%~135% constant current limiting, auto-recovery
Over voltage protection 115%~145% rated output voltage
Setup, rise, hold up time 1000ms, 50ms, 20ms at full load and 230VAC
Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
Working temperature -20°C~+60°C (refer to output derating curve)
Safety standards UL60950-1 approved
Packing 1.07kg ; 12pcs / 13.5kg / 0.92CUFT

Model No.	Output	Tol.	R&N	Effi.
NES-350-3.3	3.3V, 0~60A	+3%, -4.5%	150mV	74.0%
NES-350-5	5V, 0~60A	±3.0%	150mV	78.0%
NES-350-7.5	7.5V, 0~46A	±2.0%	150mV	80.0%
NES-350-12	12V, 0~29A	±1.5%	150mV	83.0%
NES-350-15	15V, 0~23.2A	±1.0%	150mV	84.0%
NES-350-24	24V, 0~14.6A	±1.0%	150mV	87.0%
NES-350-27	27V, 0~13A	±1.0%	200mV	88.0%
NES-350-36	36V, 0~9.7A	±1.0%	240mV	87.5%
NES-350-48	48V, 0~7.3A	±1.0%	240mV	87.5%

Enclosed-SE Series

210~450W Single Output



■ Features

- AC input selectable by switch
- Withstand 300VAC surge input for 5 seconds (except for SE-450)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan (SE-350/450)
- Built-in fan ON/OFF control (SE-350)
- Built-in constant current limiting circuit (SE-200/350)
- Withstand 5G vibration test (SE-200/350)
- Built-in remote sense function (SE-450)
- 100% full load burn-in test
- LED indicator for power on
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	SE-200	SE-350	SE-450		
AC input voltage range	90~132VAC / 180~264VAC selected by switch				
AC inrush current (max.)	Cold start, 55A at 230VAC	Cold start, 60A at 230VAC	Cold start, 55A at 230VAC		
DC adjustment range	$\pm 10\%$ rated Output voltage				
Overload	Range	105%~150%	105%~135%		
Protection	Type	Constant current limiting, auto-recovery			
Over voltage protection	115%~145%				
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P-FG: 0.5kVAC				
Working temperature	-20~+50°C	-20~+60°C	-10~+60°C (refer to output derating curve)		
Safety standards	UL60950-1 approved				
Connection	9P/9.5mm pitch terminal block with cover		9P/11mm pitch terminal block with cover		
Dimension (LxWxH)(mm)	215x 115x 50		225x 124x 50		
Case No.	912E	912C	986A		
Packing	12pcs / 12kg	12pcs / 13.5kg	12pcs / 16kg		

■ SE-200 Series

Model No.	Output	Tol.	R&N	Effi.
SE-200-3.3	3.3V, 0~40A	$\pm 2\%$	150mV	75%
SE-200-5	5V, 0~40A	$\pm 2\%$	150mV	79%
SE-200-7.5	7.5V, 0~27A	$\pm 2\%$	150mV	82%
SE-200-12	12V, 0~17A	$\pm 1\%$	150mV	85%
SE-200-15	15V, 0~14A	$\pm 1\%$	150mV	85%
SE-200-24	24V, 0~8.8A	$\pm 1\%$	150mV	87%
SE-200-27	27V, 0~7.8A	$\pm 1\%$	200mV	88%
SE-200-36	36V, 0~5.9A	$\pm 1\%$	240mV	89%
SE-200-48	48V, 0~4.4A	$\pm 1\%$	240mV	89%

■ SE-450 Series

Model No.	Output	Tol.	R&N	Effi.
SE-450-3.3	3.3V, 0~75A	$\pm 3\%$	200mV	74%
SE-450-5	5V, 0~75A	$\pm 3\%$	200mV	78%
SE-450-12	12V, 0~37.5A	$\pm 1\%$	200mV	83%
SE-450-15	15V, 0~30A	$\pm 1\%$	200mV	84%
SE-450-24	24V, 0~18.8A	$\pm 1.5\%$	200mV	86%
SE-450-36	36V, 0~12.5A	$\pm 1\%$	200mV	86%
SE-450-48	48V, 0~9.4A	$\pm 1\%$	200mV	88%

■ SE-350 Series

Model No.	Output	Tol.	R&N	Effi.
SE-350-3.3	3.3V, 0~60A	$\pm 3\%$, -4.5%	150mV	74.0%
SE-350-5	5V, 0~60A	$\pm 3.0\%$	150mV	78.0%
SE-350-7.5	7.5V, 0~46A	$\pm 2.0\%$	150mV	80.0%
SE-350-12	12V, 0~29A	$\pm 1.5\%$	150mV	83.0%
SE-350-15	15V, 0~23.2A	$\pm 1.0\%$	150mV	84.0%
SE-350-24	24V, 0~14.6A	$\pm 1.0\%$	150mV	87.0%
SE-350-27	27V, 0~13A	$\pm 1.0\%$	200mV	88.0%
SE-350-36	36V, 0~9.7A	$\pm 1.0\%$	240mV	87.5%
SE-350-48	48V, 0~7.3A	$\pm 1.0\%$	240mV	87.5%



We provide specification, drawing, test report and more information, please visit our website — <http://www.meanwell.com>



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service

Enclosed-SE Series

600~1500W Single Output



■ Features

- AC input selectable by switch (600~1000W)
- AC input 180~264VAC only (SE-1500)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in remote sense function
- DC OK, remote ON/OFF control (SE-1000/1500)
- 100% full load burn-in test
- LED indicator for power on
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	SE-600	SE-1000	SE-1500		
AC input voltage range	90~132VAC / 180~264VAC selected by switch		180~264VAC		
AC inrush current (max.)	Cold start, 60A at 230VAC	Cold start, 55A at 230VAC	Cold start, 60A at 230VAC		
DC adjustment range	$\pm 10\%$ rated Output voltage				
Overload	Range	105%~125%			
Protection	Type	Shut down o/p voltage, re-power on to recover			
Over voltage protection	115%~140%				
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, 1 minute				
Working temperature	-20~+60°C (refer to output derating curve)		-20~+70°C (refer to output derating curve)		
Safety standards	UL60950-1 approved				
EMC standards	Design refer to EN55022 class B				
Connection	Terminal block with cover for input and output (SE-1000/1500: copper pillars for output)				
Dimension (LxWxH)(mm)	247x 127x 63.5	278x 127x 63.5	278x 177.8x 63.5		
Case No.	926A	935B	982A		
Packing	6pcs / 13.4kg	6pcs / 16kg	4pcs / 14.2kg		

■ 600W

SE-600

Model No.	Output	Tol.	R&N	Effi.
SE-600-5	5V, 0~100A	$\pm 2\%$	150mV	78%
SE-600-12	12V, 0~50A	$\pm 1\%$	150mV	83%
SE-600-15	15V, 0~40A	$\pm 1\%$	150mV	84%
SE-600-24	24V, 0~25A	$\pm 1\%$	150mV	87%
SE-600-27	27V, 0~22.2A	$\pm 1\%$	150mV	87%
SE-600-36	36V, 0~16.6A	$\pm 1\%$	200mV	87%
SE-600-48	48V, 0~12.5A	$\pm 1\%$	200mV	88%

■ 1000W

SE-1000

Model No.	Output	Tol.	R&N	Effi.
SE-1000-5	5V, 0~150A	$\pm 1\%$	150mV	81%
SE-1000-9	9V, 0~100A	$\pm 1\%$	150mV	84%
SE-1000-12	12V, 0~83.3A	$\pm 1\%$	150mV	85%
SE-1000-15	15V, 0~66.7A	$\pm 1\%$	150mV	86%
SE-1000-24	24V, 0~41.7A	$\pm 1\%$	200mV	88%
SE-1000-48	48V, 0~20.8A	$\pm 1\%$	200mV	89%

■ 1500W

SE-1500

Model No.	Output	Tol.	R&N	Effi.
SE-1500-5	5V, 0~300A	$\pm 2\%$	150mV	81%
SE-1500-12	12V, 0~125A	$\pm 1\%$	150mV	85%
SE-1500-15	15V, 0~100A	$\pm 1\%$	150mV	85%
SE-1500-24	24V, 0~62.5A	$\pm 1\%$	150mV	87%
SE-1500-27	27V, 0~55.6A	$\pm 1\%$	150mV	88%
SE-1500-48	48V, 0~31.3A	$\pm 1\%$	150mV	89%

MSP-450 Series

+ Under Development

450W High Reliability Medical Power Supply



- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- 1U low profile: 41mm
- High efficiency up to 89.5%
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Leakage current $\leq 300\mu\text{A}$
- Built-in constant current limiting circuit
- Built-in remote sense function
- Built-in remote ON/OFF control & 5V/0.3A standby output
- No load power consumption $< 0.5\text{W}$
- Forced air cooling by built-in DC fan
- Design refer to IEC/EN60601-1, ANSI/AAMI ES60601-1(MOOP level)
- Output models: 3.3V / 5V / 7.5V / 12V / 15V / 24V / 36V / 48V
- 5 years warranty



■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.(SP-150 / 200 / 240)
- Cooling by free air convection (SP-75 / 100 / 150)
- Forced air cooling by built-in DC fan (SP-200 / 240)
- Optional remote ON/OFF control (SP-75~200)
- Built-in fan speed control (SP-200)
- Built-in fan ON/OFF control (SP-240)
- 100% full load burn-in test
- 3 years warranty



(SP-200 only)

CB CE

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	SP-75	SP-100	SP-150	SP-200	SP-240		
AC input voltage range	85~264VAC, 120~370VDC				88~264VAC, 124~370VDC		
AC inrush current (max.)	Cold start, 30A at 230VAC				Cold start, 40A at 230VAC		
DC adjustment range	-5%~+10% rated output voltage				±15% rated output voltage		
Overload protection	Range	105%~150%					
	Type	Constant current, auto-recovery					
Over voltage protection	Range	115%~135%	110%~135%				
	Type	Shut off, AC recycle to re-start					
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC, 1 minute						
Working temperature	-10~+60°C		-10~+55°C	-10~+60°C	-20~+70°C		
Safety standards	UL60950-1, TUV EN60950-1, GB4943(SP-200 only) approved						
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, GB9254(SP-200 only)						
Connection	5P / 9.5mm pitch	7P / 9.5mm pitch terminal block with cover					
Dimension (LxWxH)(mm)	179x97x33	179x99x45	199x99x50	199x99x50	190x93x50		
Case No.	920A	915A	916A	916B	987A		
Packing	20pcs/12.0kg	20pcs/14.3kg	20pcs/16.4kg	20pcs/17.9kg	18pcs/15.4kg		

■ 75W

SP-75

Model No.	Output	Tol.	R&N	Effi.
SP-75-3.3	3.3V, 0~15A	±2%	80mV	68%
SP-75-5	5V, 0~15A	±2%	80mV	72%
SP-75-7.5	7.5V, 0~10A	±2%	80mV	74%
SP-75-12	12V, 0~6.3A	±2%	80mV	77%
SP-75-13.5	13.5V, 0~5.6A	±2%	80mV	78%
SP-75-15	15V, 0~5.0A	±2%	80mV	79%
SP-75-24	24V, 0~3.2A	±1%	100mV	80%
SP-75-27	27V, 0~2.8A	±1%	100mV	80%
SP-75-48	48V, 0~1.6A	±1%	100mV	80%

■ 100W

SP-100

Model No.	Output	Tol.	R&N	Effi.
SP-100-3.3	3.3V, 0~20.0A	±2%	100mV	70%
SP-100-5	5V, 0~20.0A	±2%	100mV	76%
SP-100-7.5	7.5V, 0~13.5A	±2%	100mV	78%
SP-100-12	12V, 0~8.50A	±2%	100mV	80%
SP-100-13.5	13.5V, 0~7.50A	±2%	100mV	80%
SP-100-15	15V, 0~6.70A	±2%	100mV	82%
SP-100-24	24V, 0~4.20A	±1%	150mV	84%
SP-100-27	27V, 0~3.80A	±1%	150mV	83%
SP-100-48	48V, 0~2.10A	±1%	250mV	82%

■ 150W

SP-150

Model No.	Output	Tol.	R&N	Effi.
SP-150-3.3	3.3V, 0~30.0A	±2%	100mV	67%
SP-150-5	5V, 0~30.0A	±2%	100mV	75%
SP-150-7.5	7.5V, 0~20.0A	±2%	100mV	79%
SP-150-12	12V, 0~12.5A	±2%	100mV	80%
SP-150-13.5	13.5V, 0~11.2A	±2%	100mV	80%
SP-150-15	15V, 0~10.0A	±2%	100mV	81%
SP-150-24	24V, 0~6.30A	±1%	150mV	83%
SP-150-27	27V, 0~5.60A	±1%	150mV	84%
SP-150-48	48V, 0~3.20A	±1%	250mV	84%

■ 200W

SP-200

Model No.	Output	Tol.	R&N	Effi.
SP-200-3.3	3.3V, 0~40.0A	±2%	100mV	65%
SP-200-5	5V, 0~40.0A	±2%	100mV	71%
SP-200-7.5	7.5V, 0~26.7A	±2%	100mV	76%
SP-200-12	12V, 0~16.7A	±2%	100mV	79%
SP-200-13.5	13.5V, 0~14.9A	±2%	100mV	80%
SP-200-15	15V, 0~13.4A	±2%	100mV	81%
SP-200-24	24V, 0~8.40A	±1%	150mV	83%
SP-200-27	27V, 0~7.50A	±1%	150mV	83%
SP-200-48	48V, 0~4.20A	±1%	250mV	84%

■ 240W

SP-240

Model No.	Output	Tol.	R&N	Effi.
SP-240-5	5V, 0~45A	±2%	150mV	79%
SP-240-7.5	7.5V, 0~32A	±2%	150mV	83%
SP-240-12	12V, 0~20A	±1%	150mV	86%
SP-240-15	15V, 0~16A	±1%	150mV	86%
SP-240-24	24V, 0~10A	±1%	150mV	87%
SP-240-30	30V, 0~8.0A	±1%	150mV	88%
SP-240-48	48V, 0~5.0A	±1%	150mV	89%



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.



Features

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in fan speed control (SP-320)
- Built-in remote sense function and ON/OFF control (SP-480/750 & PSP-600)
- Current sharing up to 2400W (3+1) (PSP-600)
- With DC OK signal output (PSP-600)
- With PG/PF signal output (SP-750)
- 100% full load burn-in test
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	SP-320	SP-480	PSP-600	SP-750	
AC input voltage range	88~264VAC	85~264VAC	88~264VAC	90~264VAC	
AC inrush current (max.)	Cold start, 40A at 230VAC			Cold Start, 45A at 230VAC	
DC adjustment range	±10% rated output voltage				
Overload protection	Range Type	105%~135% Hiccup mode, auto-recovery	105%~145% Constant current limiting, auto-recovery	105%~135% Constant current limiting, auto-recovery	105%~125% Constant current limiting, hiccup after 3sec.
Over voltage protection	115%~145%	115%~140%			
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute				
Working temperature	-20~+65°C	-20~+60°C			
Safety standards	UL60950-1, TUV EN60950-1 approved; GB4943 approved also for SP-320 (except for 3.3V/ 5PNC/ 36V)				
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN61000-6-2(SP-480/750), GB9254 (SP-320 only)				
Connection	9P / 9.5mm pitch terminal block with cover	9P / 11mm pitch terminal block with cover	7+8P / 9.5mm pitch terminal block with cover	5P / 10mm pitch terminal block with cover for input; copper pillars for output	
Dimension (LxWxH)(mm)	215x115x50	278x127x43	170x120x93	278x127x63.5	
Case No.	912G	929A	910A	919A	
Packing	12pcs / 14.0kg	6pcs / 11.3kg	8pcs / 15.5kg	6pcs / 18.4kg	

SP-320 Series



Model No.	Output	Tol.	R&N	Effi.
*SP-320-3.3	3.3V, 0~60.0A	±1%	150mV	74%
SP-320-5	5V, 0~55.0A	±2%	150mV	79%
*SP-320-5PNC	5V, 0~55.0A	±2%	150mV	80%
SP-320-7.5	7.5V, 0~40.0A	±2%	150mV	83%
SP-320-12	12V, 0~25.0A	±1%	150mV	86%
SP-320-13.5	13.5V, 0~22.0A	±1%	150mV	86%
SP-320-15	15V, 0~20.0A	±1%	150mV	86%
SP-320-24	24V, 0~13.0A	±1%	150mV	87%
SP-320-27	27V, 0~11.7A	±1%	200mV	88%
*SP-320-36	36V, 0~8.80A	±1%	220mV	87%
SP-320-48	48V, 0~6.70A	±1%	240mV	89%

* Without CCC models

* SP-320-5PNC with conformal coating and high ambient temperature operation ability is suitable for LED moving sign applications, MOQ required.

PSP-600 Series



Model No.	Output	Tol.	R&N	Effi.
PSP-600-5	5V, 0~80A	±2%	180mV	79%
PSP-600-12	12V, 0~50A	±1%	240mV	84%
PSP-600-13.5	13.5V, 0~44.5A	±1%	240mV	85%
PSP-600-15	15V, 0~40A	±1%	240mV	85%
PSP-600-24	24V, 0~25A	±1%	240mV	86%
PSP-600-27	27V, 0~22.2A	±1%	240mV	86%
PSP-600-48	48V, 0~12.5A	±1%	300mV	87%

SP-750 Series



Model No.	Output	Tol.	R&N	Effi.
SP-750-5	5V, 0~120A	±2%	120mV	80%
SP-750-12	12V, 0~62.5A	±1%	120mV	85%
SP-750-15	15V, 0~50.0A	±1%	120mV	87%
SP-750-24	24V, 0~31.3A	±1%	120mV	89%
SP-750-27	27V, 0~27.8A	±1%	120mV	89%
SP-750-48	48V, 0~15.7A	±1%	120mV	90%



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —

Enclosed-PFC

200~1000W Single Output



200W Low Profile with PFC



CBCE

NEW



CASE: 207B

215x 115x 30 mm

- 1U low profile: 30mm
- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Optional conformal coating (RSP-200-□CC)
- LED indicator for power on
- 3 years warranty

AC input voltage range 88~264VAC; 124~370VDC
 AC inrush current Cold start, 40A at 230VAC
 DC adjustment range ±10% rated output voltage
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection 115%~145% rated output voltage
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
RSP-200-2.5	2.5V, 0~40A	±2%	100mV	79.5%
RSP-200-3.3	3.3V, 0~40A	±2%	100mV	83.0%
RSP-200-4	4V, 0~40A	±2%	100mV	84.5%
RSP-200-5	5V, 0~40A	±2%	150mV	86.0%
RSP-200-7.5	7.5V, 0~26.7A	±2%	150mV	88.0%
RSP-200-12	12V, 0~16.7A	±1%	150mV	88.0%
RSP-200-13.5	13.5V, 0~14.9A	±1%	150mV	88.0%
RSP-200-15	15V, 0~13.4A	±1%	150mV	88.5%
RSP-200-24	24V, 0~8.4A	±1%	150mV	89.0%
RSP-200-27	27V, 0~7.5A	±1%	200mV	89.0%
RSP-200-36	36V, 0~5.56A	±1%	220mV	89.5%
RSP-200-48	48V, 0~4.2A	±1%	240mV	90.0%

320W Low Profile with PFC



CBCE

NEW



CASE: 207A

215x 115x 30 mm

- 1U low profile: 30mm
- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Built-in fan speed control
- Optional conformal coating (RSP-320-□CC)
- LED indicator for power on
- 3 years warranty

AC input voltage range 88~264VAC; 124~370VDC
 AC inrush current Cold start, 40A at 230VAC
 DC adjustment range ±10% rated output voltage
 Overload protection 105%~140% hiccup mode, auto-recovery
 Over voltage protection 115%~145% rated output voltage
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
RSP-320-2.5	2.5V, 0~60A	±2%	100mV	79.5%
RSP-320-3.3	3.3V, 0~60A	±2%	100mV	83.0%
RSP-320-4	4V, 0~60A	±2%	100mV	84.5%
RSP-320-5	5V, 0~60A	±2%	150mV	86.0%
RSP-320-7.5	7.5V, 0~40A	±2%	150mV	88.0%
RSP-320-12	12V, 0~26.7A	±1%	150mV	88.0%
RSP-320-13.5	13.5V, 0~23.8A	±1%	150mV	88.0%
RSP-320-15	15V, 0~21.4A	±1%	150mV	88.5%
RSP-320-24	24V, 0~13.4A	±1%	150mV	89.0%
RSP-320-27	27V, 0~11.9A	±1%	200mV	89.0%
RSP-320-36	36V, 0~8.9A	±1%	220mV	89.5%
RSP-320-48	48V, 0~6.7A	±1%	240mV	90.0%

750W Low Profile with PFC



CBCE

NEW



CASE: 212A

250x 127x 41 mm

- 1U low profile: 41mm
- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp. / Fan alarm
- Forced air cooling by built-in DC with fan speed control function
- High power density 9.44W/in³
- Output voltage can be trimmed 40~110% by 2~5.5VDC external control signal
- Output current can be trimmed 40~110% by 2~5.5VDC external control signal
- DC OK signal
- Built-in remote sense and ON/OFF control
- Built-in 12V/0.1A auxiliary power
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range ±10% rated output voltage
 Overload protection 105%~125% constant current, auto-recovery
 Over voltage protection 115%~140% rated output voltage
 Setup, rise, hold up time 1000ms, 50ms, 16ms at full load and 230VAC
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11, EN61000-6-2

Model No.	Output	Tol.	R&N	Effi.
RSP-750-5	5V, 0~100A	±2%	150mV	82%
RSP-750-12	12V, 0~62.5A	±1%	150mV	87%
RSP-750-15	15V, 0~50A	±1%	150mV	89%
RSP-750-24	24V, 0~31.3A	±1%	150mV	91%
RSP-750-27	27V, 0~27.8A	±1%	150mV	91%
RSP-750-48	48V, 0~15.7A	±1%	150mV	92%

1000W Low Profile with PFC & Parallel



CBCE

NEW



CASE: 952B

295x 127x 41 mm

- 1U low profile: 41mm
- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- High power density 10.7W/in³
- Output voltage can be trimmed 40~110% by 2~5.5VDC external control signal
- Current sharing up to 4000W (3+1)
- DC OK signal
- Built-in remote sense and ON/OFF control
- Built-in 5V/0.5A auxiliary power
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range ±10% rated output voltage
 Overload protection 105%~125% constant current, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Setup, rise, hold up time 300ms, 50ms, 16ms at full load and 230VAC
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute
 Working temperature -20~+60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 Class B conducted,
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11,
 EN61000-6-2
 Packing 1.95kg ; 6pcs / 12.7kg / 1.15CUFT

Model No.	Output	Tol.	R&N	Effi.
RSP-1000-12	12V, 0~60A	±1%	150mV	83%
RSP-1000-15	15V, 0~50A	±1%	150mV	85%
RSP-1000-24	24V, 0~40A	±1%	150mV	88%
RSP-1000-27	27V, 0~37A	±1%	150mV	88%
RSP-1000-48	48V, 0~21A	±1%	150mV	90%

Enclosed-PFC

1500~3000W Single Output



1500W with PFC and Parallel Function



CASE: 943A 278x 127x 83.5 mm

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Using ZVS technology to reduce power dissipation
- High power density 8.3W/in³
- Built-in 12V / 0.1A auxiliary output
- Alarm signal output
- DC output voltage adjustment 70~100% by external resistor
- Active current sharing up to 6000W (3+1)
- Built-in remote sense function
- Built-in remote ON/OFF control
- Forced air cooling by built-in DC fan
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC

DC adjustment range -30%~+10% rated output voltage

Overload protection 105%~135% constant current limiting, shut off after 5 sec.

Over voltage protection 115%~140% rated output voltage

Setup, rise, hold up time 1500ms, 100ms, 10ms at full load and 230VAC

Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute

Working temperature -20~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,

EN61000-4-2,3,4,5,6,8,11

Packing 3.0kg ; 4pcs / 13kg / 1.19CUFT

Model No.	Output	Tol.	R&N	Effi.
RSP-1500-5	5V, 0~240A	±2%	150mV	80%
RSP-1500-12	12V, 0~125A	±1%	150mV	87%
RSP-1500-15	15V, 0~100A	±1%	150mV	87%
RSP-1500-24	24V, 0~63A	±1%	150mV	90%
RSP-1500-27	27V, 0~56A	±1%	150mV	90%
RSP-1500-48	48V, 0~32A	±1%	200mV	91%

2000W Low Profile with PFC & Parallel



CASE: 952D 295x 127x 41 mm

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- Output voltage can be trimmed 40~115% by 1~4.7VDC external control signal
- High power density 21.4W/in³
- Built-in 12V/0.8A & 5V/0.3A auxiliary output
- Current sharing up to 8000W(3+1)
- Alarm signal output
- Built-in remote sense and ON/OFF control
- 1U low profile: 41mm
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC

DC adjustment range ±10% rated output voltage

Overload protection 105%~125% constant current limiting, shut off after 5 sec., re-power on to recover

Over voltage protection 120%~145% rated output voltage

Setup, rise, hold up time 1500ms, 60ms, 10ms at full load and 230VAC

Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute

Working temperature -35~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,

EN61000-4-2,3,4,5,6,8,11

Packing 1.95kg ; 6pcs / 12.7kg / 1.15CUFT

Model No.	Output	Tol.	R&N	Effi.
RSP-2000-12	12V, 0~100A	±2%	150mV	87.0%
RSP-2000-24	24V, 0~80A	±1%	200mV	90.5%
RSP-2000-48	48V, 0~42A	±1%	300mV	92.0%

2400W with PFC and Parallel Function



CASE: 982B 278x 177.8x 63.5 mm

- AC input 180~264VAC only
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature / Fan alarm
- Forced air cooling by built-in DC with fan speed control function
- Output voltage can be trimmed 20~110% by 1~5.5VDC external control signal
- High power density 12.5W/in³
- Current sharing up to 7200W (2+1)
- Alarm signal output (TTL signal & relay contact)
- Built-in 12V/0.1A auxiliary output
- Built-in remote ON/OFF control
- Built-in remote sense function
- 3 years warranty

AC input voltage range 180~264VAC; 254~370VDC

DC adjustment range ±10% rated output voltage

Overload protection 100%~112% constant current limiting, shut off after 5 sec., re-power on to recover (can adjust to continuous constant current limiting)

Over voltage protection 115%~140% rated output voltage

Setup, rise, hold up time 1000ms, 80ms, 12ms at full load and 230VAC

Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute

Working temperature -20~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
RSP-2400-12	12V, 0~166.7A	±1%	150mV	87.0%
RSP-2400-24	24V, 0~100A	±1%	150mV	90.0%
RSP-2400-48	48V, 0~50A	±1%	200mV	91.0%

3000W with PFC and Parallel Function



CASE: 982B 278x 177.8x 63.5 mm

- AC input 180~264VAC only
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature / Fan alarm
- Forced air cooling by built-in DC with fan speed control function
- Output voltage can be trimmed 20~110% by 1~5.5VDC external control signal
- High power density 15.6W/in³
- Current sharing 9000W (2+1)
- Alarm signal output (TTL signal & relay contact)
- Built-in 12V/0.1A auxiliary output
- Built-in remote ON/OFF control
- Built-in remote sense function
- 3 years warranty

AC input voltage range 180~264VAC; 254~370VDC

DC adjustment range ±10% rated output voltage

Overload protection 100%~112% constant current limiting, shut off after 5 sec., re-power on to recover (can adjust to continuous constant current limiting)

Over voltage protection 115%~140% rated output voltage

Setup, rise, hold up time 1000ms, 80ms, 10ms at full load and 230VAC

Withstand voltage I/P-O/P:3kVAC, I/P-FG:2kVAC, 1 minute

Working temperature -20~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
RSP-3000-12	12V, 0~200A	±1%	150mV	86.0%
RSP-3000-24	24V, 0~125A	±1%	150mV	89.5%
RSP-3000-48	48V, 0~62.5A	±1%	200mV	90.5%



QP-375 QP-320 QP-200 TP-150
QP-150 TP-100 QP-100 TP-75

Features

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Over temperature protection (200~375W built-in, option for 100W and 150W)
- Built-in active PFC function
- Cooling by free air convection (75W / 100W)
- Forced air cooling by built-in DC fan (150W / 200W / 320W / 375W)
- 100% full load burn-in test
- 3 years warranty



(except for QP-320)

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	TP-75	TP-100 QP-100	TP-150 QP-150	QP-200	QP-320	QP-375		
AC input voltage range	90~264VAC; 127~370VDC					85~264VAC; 120~370VDC		
AC inrush current (max.)	Cold start, 20A at 230VAC	Cold start, 40A at 230VAC		Cold start, 30A at 230VAC	Cold start, 45A at 230VAC			
DC adjustment range	CH1: -5%~+10% rated output voltage (CH1&2 for QP-100/150-3x, QP-100/150-D/F)		CH1&2: -5%~+10% rated output voltage		All outputs: -5%~+10% for QP-375-5, ±10% for QP-375-24			
Overload protection	Range	105%~150%						
Over voltage protection	CH1: 115%~135%	115%~135% for CH1 or CH1&2				CH1: 115%~135% rated output voltage		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, 1 minute							
Working temperature	-10°C~+60°C (refer to output derating curve)			-10°C~+70°C	-10°C~+60°C			
Setup, rise, hold up time	800ms, 60ms, 36ms at full load and 230VAC	800ms, 60ms, 24ms at full load and 230VAC(TP-100/150); 800ms, 50ms, 24ms at full load and 230VAC (QP-100/150)		800ms, 50ms, 24ms at full load and 230VAC	800ms, 50ms, 16ms at full load and 230VAC	800ms, 50ms, 36ms at full load and 230VAC		
Safety standards	UL60950-1, TUV EN60950-1 approved							
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11							
Connection	8P / 7.62mm pitch terminal block	9P / 7.62mm pitch terminal block with cover		9P / 9.5mm pitch terminal block with cover		3P / 9.5mm pitch terminal block for input; 10P / 9.5mm pitch terminal block for output		
Dimension (LxWxH)(mm)	179x 99x 33	199x 99x 50		215x 115x 50	280x 127x 63.5			
Case No.	920A	916A	916B	912B	912I	927A		

75W – Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-75A	5V, 1.5~10A	±3%	100mV	70%	74W
	12V, 0.2~4.0A	±4%	120mV		
	-5V, 0.0~0.6A	±8%	100mV		
TP-75B	5V, 1.5~10A	±3%	100mV	70%	76W
	12V, 0.2~4.0A	±4%	120mV		
	-12V, 0.0~0.6A	±8%	120mV		
TP-75C	5V, 1.5~10A	±3%	100mV	70%	75W
	15V, 0.2~3.0A	±4%	120mV		
	-15V, 0.0~0.6A	±8%	120mV		
TP-75D	5V, 1.5~10A	±3%	100mV	70%	76W
	24V, 0.2~2.5A	±4%	120mV		
	12V, 0.0~0.6A	±8%	120mV		
TP-7503	5V, 1.5~10A	±3%	100mV	70%	75W
	3.3V, 0.2~8.0A	±4%	50mV		
	12V, 0.0~0.6A	±8%	120mV		

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-100B	5V, 3.0~15A	±3%	100mV	78%	105W
	12V, 0.4~5.0A	±6%	120mV		
TP-100C	-12V, 0.0~1.0A	±6%	100mV	77%	104W
	5V, 3.0~15A	±3%	100mV		
TP-100D	15V, 0.4~4.0A	+10%, -6%	150mV	78%	105W
	-15V, 0.0~1.0A	±6%	100mV		
TP-100D	5V, 3.0~15A	±3%	100mV	78%	105W
	24V, 0.4~3.0A	±8%	150mV		
TP-100D	12V, 0.0~1.0A	±6%	100mV		

150W – Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-150A	5V, 2.0~20A	±3%	100mV	75%	150W
	12V, 0.4~7.0A	±8%	120mV		
TP-150B	-5V, 0.0~1.0A	±6%	100mV	77%	148W
	5V, 2.0~20A	±3%	100mV		
TP-150C	12V, 0.4~7.0A	±8%	120mV	77%	152W
	-12V, 0.0~1.0A	±6%	100mV		
TP-150D	5V, 2.0~20A	±3%	100mV	78%	154W
	15V, 0.4~6.0A	+10%, -6%	150mV		
TP-150D	-15V, 0.0~1.0A	±6%	100mV		
	5V, 2.0~20A	±3%	100mV		
TP-150D	24V, 0.4~4.0A	±8%	150mV		
	12V, 0.0~1.0A	±6%	100mV		

100W – Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-100A	5V, 3.0~15A	±3%	100mV	75%	101W
	12V, 0.4~5.0A	±7%	120mV		
	-5V, 0.0~1.0A	±6%	100mV		

Enclosed-PFC



100W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-100B	5V, 2.0~10A	±3%	100mV	76%	101W
	12V, 0.3~4.0A	±6%	150mV		
	-12V, 0.15~1.0A	+10%, -6%	150mV		
	-5V, 0.0~1.0A	±5%	100mV		
QP-100C	5V, 2.0~10A	±3%	100mV	77%	101W
	15V, 0.3~3.0A	+6%, -10%	150mV		
	-15V, 0.15~1.0A	±8%	150mV		
	-5V, 0.0~1.0A	±5%	100mV		
QP-100D	5V, 2.0~10A	±3%	120mV	78%	100W
	12V, 0.0~3.0A	±3%	150mV		
	24V, 0.3~2.0A	±6%	200mV		
	-12V, 0.0~1.0A	±5%	150mV		
QP-100F	5V, 2.0~10A	±3%	120mV	78%	103W
	15V, 0.0~3.0A	±3%	180mV		
	24V, 0.3~2.0A	±6%	200mV		
	-15V, 0.0~1.0A	±5%	150mV		
QP-100-3A	5V, 2.0~10A	±3%	100mV	74%	99W
	3.3V, 0.0~10A	±3%	100mV		
	12V, 0.3~3.0A	±6%	150mV		
	-5V, 0.0~1.0A	±5%	150mV		
QP-100-3B	5V, 2.0~10A	±3%	100mV	74%	100W
	3.3V, 0.0~10A	±3%	100mV		
	12V, 0.3~3.0A	±6%	150mV		
	-12V, 0.0~1.0A	±5%	150mV		
QP-100-3C	5V, 2.0~10A	±3%	100mV	75%	101W
	3.3V, 0.0~10A	±3%	100mV		
	15V, 0.3~2.0A	+8%, -6%	150mV		
	-15V, 0.0~1.0A	±5%	150mV		
QP-100-3D	5V, 2.0~10A	±3%	100mV	75%	105W
	3.3V, 0.0~10A	±3%	100mV		
	24V, 0.3~2.0A	±6%	150mV		
	-12V, 0.0~1.0A	±5%	150mV		

200W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-200D	5V, 3.0~20A	±3%	100mV	75%	203W
	12V, 0.0~7.0A	±3%	150mV		
	24V, 0.4~6.0A	+10%, -6%	150mV		
	-12V, 0.0~1.0A	±6%	150mV		
QP-200F	5V, 3.0~20A	±3%	100mV	75%	203W
	15V, 0.0~6.0A	±3%	150mV		
	24V, 0.4~6.0A	+10%, -6%	150mV		
	-15V, 0.0~1.0A	±6%	150mV		
QP-200-3A	5V, 3.0~20A	±3%	100mV	72%	200W
	3.3V, 0.0~20A	±3%	100mV		
	12V, 0.5~8.0A	+8%, -10%	150mV		
	-5V, 0.0~1.0A	±6%	150mV		
QP-200-3B	5V, 3.0~20A	±3%	100mV	72%	205W
	3.3V, 0.0~20A	±3%	100mV		
	12V, 0.5~8.0A	+8%, -10%	150mV		
	-12V, 0.0~1.0A	±6%	150mV		
QP-200-3C	5V, 3.0~20A	±3%	100mV	72%	210W
	3.3V, 0.0~20A	±3%	100mV		
	15V, 0.5~7.0A	+10%, -6%	150mV		
	-15V, 0.0~1.0A	±6%	150mV		
QP-200-3D	5V, 3.0~20A	±3%	100mV	74%	204W
	3.3V, 0.0~20A	±3%	100mV		
	24V, 0.4~6.0A	+10%, -6%	150mV		
	-12V, 0.0~1.0A	±6%	150mV		
QP-200-3E	5V, 3.0~20A	±3%	100mV	74%	206W
	3.3V, 0.0~20A	±3%	100mV		
	24V, 0.4~6.0A	+10%, -6%	150mV		
	-15V, 0.0~1.0A	±6%	150mV		

150W — Quad Output


Model No.	Output	Tol.	R&N	Effi.	Max.
QP-150B	5V, 3.0~15A	±3%	100mV	76%	150W
	12V, 0.4~5.0A	±6%	150mV		
	-12V, 0.3~2.0A	+10%, -6%	150mV		
	-5V, 0.0~1.0A	±5%	100mV		
QP-150C	5V, 3.0~15A	±3%	100mV	77%	153W
	15V, 0.4~4.0A	+6%, -10%	150mV		
	-15V, 0.3~2.0A	±8%	150mV		
	-5V, 0.0~1.0A	±5%	100mV		
QP-150D	5V, 3.0~15A	±3%	120mV	78%	150W
	12V, 0.0~5.0A	±3%	150mV		
	24V, 0.4~3.0A	±6%	200mV		
	-12V, 0.0~1.0A	±5%	150mV		
QP-150F	5V, 3.0~15A	±3%	120mV	78%	152W
	15V, 0.0~5.0A	±3%	150mV		
	24V, 0.4~3.0A	±6%	200mV		
	-15V, 0.0~1.0A	±5%	150mV		
QP-150-3A	5V, 3.0~15A	±3%	120mV	78%	152W
	3.3V, 0.0~15A	±3%	100mV	73%	146W
	12V, 0.4~5.0A	±6%	150mV		
	-5V, 0.0~1.0A	±5%	150mV		
QP-150-3B	5V, 3.0~15A	±3%	100mV	75%	150W
	3.3V, 0.0~15A	±3%	100mV		
	12V, 0.4~5.0A	±6%	150mV		
	-12V, 0.0~1.0A	±5%	150mV		
QP-150-3C	5V, 3.0~15A	±3%	100mV	74%	152W
	3.3V, 0.0~15A	±3%	100mV		
	15V, 0.4~5.0A	+8%, -6%	150mV		
	-15V, 0.0~1.0A	±5%	150mV		
QP-150-3D	5V, 3.0~15A	±3%	100mV	76%	150W
	3.3V, 0.0~15A	±3%	100mV		
	24V, 0.3~3.0A	±6%	150mV		
	-12V, 0.0~1.0A	±5%	150mV		

320W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-320D	5V, 2.5~20A	±3%	100mV	83%	316W
	12V, 0.0~10A	±3%	150mV		
	24V, 0.2~5.0A	+10%, -6%	150mV		
	-12V, 0.2~2.0A	±10%	150mV		
QP-320F	5V, 2.5~20A	±3%	100mV	83%	316W
	15V, 0.0~10A	±3%	150mV		
	24V, 0.2~5.0A	+10%, -6%	150mV		
	-15V, 0.2~1.6A	±10%	150mV		

375W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-375-5A	5V, 3.5~40A	±1%	100mV	77%	378W
	12V, 0.0~16A	±1%	150mV		
	±12V, 0.0~6.0A	±1%	150mV		
	±12V, 0.0~3.0A	±1%	50mV		
QP-375-5B	5V, 3.5~40A	±1%	100mV	77%	357W
	12V, 0.0~16A	±1%	120mV		
	±12V, 0.0~6.0A	±1%	120mV		
	±5V, 0.0~3.0A	±1%	50mV		
QP-375-5C	5V, 3.5~40A	±1%	100mV	77%	378W
	12V, 0.0~16A	±1%	150mV		
	±15V, 0.0~4.0A	±1%	150mV		
	±15V, 0.0~4.0A	±1%	240mV		
QP-375-5D	5V, 3.5~40A	±1%	100mV	78%	378W
	12V, 0.0~16A	±1%	120mV		
	±12V, 0.0~6.0A	±1%	120mV		
	±24V, 0.0~3.0A	±1%	240mV		
QP-375-5E	5V, 3.5~40A	±1%	100mV	78%	378W
	12V, 0.0~16A	±1%	120mV		
	±24V, 0.0~4.0A	±1%	120mV		
	±24V, 0.0~3.0A	±1%	240mV		
QP-375-24B	24V, 1.0~10A	±1%	240mV	78%	386W
	5V, 0.0~16A	±1%	50mV		
	±12V, 0.0~4.0A	±1%	120mV		
	±12V, 0.0~4.0A	±1%	120mV		
QP-375-24C	24V, 1.0~10A	±1%	240mV	80%	410W
	5V, 0.0~10A	±1%	50mV		
	±15V, 0.0~4.0A	±1%	150mV		
	±15V, 0.0~4.0A	±1%	150mV		

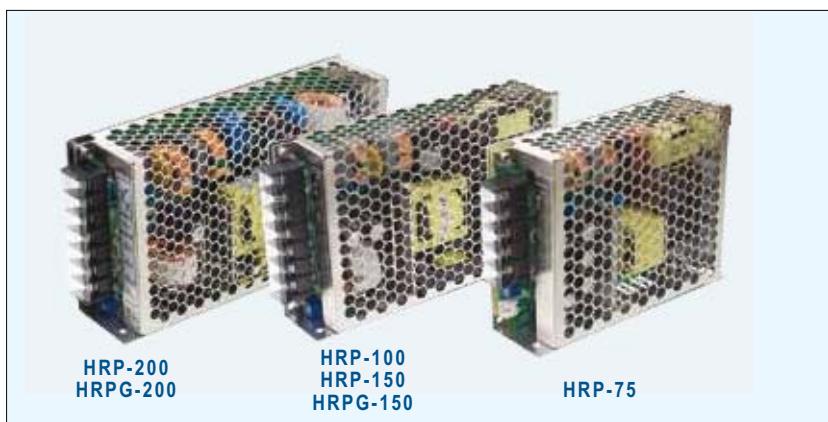

Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections:
Short circuit / Overload / Over voltage / Over temperature (optional for HRP-75 / HRP-100)
- Built-in constant current limiting circuit
- Built-in remote sense function (HRP□-150 / 200)
- No load power consumption<0.5W (except for HRP-150/200)
- Built-in remote ON/OFF control (except for HRP-150 / 200)
- Built-in 5V / 0.3A standby output (HRPG-150 / 200)
- Cooling by free air convection
- 1U low profile
- LED indicator for power on
- 100% full load burn-in test
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	HRP-75	HRP-100	HRP□-150	HRP□-200
AC input voltage range	85~264VAC, 120~370VDC			
AC inrush current (max.)	Cold start, 65A at 230VAC		Cold start, 70A at 230VAC	
DC adjustment range	-5%~+10% rated output voltage		±15% rated output voltage	
Overload protection	Range Type	105%~135% Constant current limiting, auto-recovery		
Over voltage protection	115%~145%			
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute			
Working temperature	-40~+70°C (refer to output derating curve)	-40~+60°C	-40~+70°C	
Safety standards	UL60950-1, TUV EN60950-1 approved			
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN61000-6-2 heavy industry level			
Connection	5P / 9.5mm pitch terminal block with cover	7P / 9.5mm pitch terminal block with cover		
Dimension (LxWxH)(mm)	129x98x38	159x97x38	199x 98x 38	
Case No.	903D	901I	902E	

75W

HRP-75

Model No.	Output	Tol.	R&N	Effi.
HRP-75-3.3	3.3V, 0~15A	±2.5%	80mV	77.0%
HRP-75-5	5V, 0~15A	±2.5%	80mV	82.5%
HRP-75-7.5	7.5V, 0~10A	±2.5%	100mV	84.0%
HRP-75-12	12V, 0~6.3A	±1.5%	120mV	87.0%
HRP-75-15	15V, 0~5A	±1.5%	150mV	88.0%
HRP-75-24	24V, 0~3.2A	±1.5%	150mV	88.5%
HRP-75-36	36V, 0~2.1A	±1.5%	200mV	89.0%
HRP-75-48	48V, 0~1.6A	±1.5%	240mV	89.0%

150W

HRP□-150

Model No.	Output	Tol.	R&N	Effi.
HRP□-150-3.3	3.3V, 0~30A	±2.5%	80mV	78.5%
HRP□-150-5	5V, 0~26A	±2.5%	80mV	85.0%
HRP□-150-7.5	7.5V, 0~20A	±2.5%	100mV	87.0%
HRP□-150-12	12V, 0~13A	±1.5%	120mV	88.0%
HRP□-150-15	15V, 0~10A	±1.5%	150mV	88.0%
HRP□-150-24	24V, 0~6.5A	±1.5%	150mV	88.0%
HRP□-150-36	36V, 0~4.3A	±1.5%	200mV	89.0%
HRP□-150-48	48V, 0~3.3A	±1.5%	240mV	89.0%

□=blank, G: blank: basic function, G: with 5Vsb & no load <0.5W

100W

HRP-100

Model No.	Output	Tol.	R&N	Effi.
HRP-100-3.3	3.3V, 0~20A	+2.5%, -3.5%	80mV	78.0%
HRP-100-5	5V, 0~17A	±2.5%	80mV	83.0%
HRP-100-7.5	7.5V, 0~13.5A	±2.5%	100mV	84.0%
HRP-100-12	12V, 0~8.5A	±1.5%	120mV	87.5%
HRP-100-15	15V, 0~7A	±1.5%	150mV	88.0%
HRP-100-24	24V, 0~4.5A	±1.5%	150mV	88.5%
HRP-100-36	36V, 0~2.9A	±1.5%	200mV	89.0%
HRP-100-48	48V, 0~2.2A	±1.5%	240mV	90.0%

200W

HRP□-200

Model No.	Output	Tol.	R&N	Effi.
HRP□-200-3.3	3.3V, 0~40A	±2%	80mV	80.0%
HRP□-200-5	5V, 0~35A	±2%	90mV	84.0%
HRP□-200-7.5	7.5V, 0~26.7A	±2%	100mV	86.0%
HRP□-200-12	12V, 0~16.7A	±1%	120mV	88.0%
HRP□-200-15	15V, 0~13.4A	±1%	150mV	88.0%
HRP□-200-24	24V, 0~8.4A	±1%	150mV	88.0%
HRP□-200-36	36V, 0~5.7A	±1%	250mV	89.0%
HRP□-200-48	48V, 0~4.3A	±1%	250mV	89.0%

□=blank, G: blank: basic function, G: with 5Vsb & no load <0.5W



Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Built-in constant current limiting circuit
- Built-in remote sense function
- Built-in DC OK signal
- No load power consumption<0.5W (HRPG-300 / 450)
- No load power consumption<0.75W (HRPG-600)
- Built-in remote ON/OFF control & 5V / 0.3A standby output (HRPG series)
- **Built-in current sharing (HRPG-600-24 / 36 / 48)**
- Forced air cooling by built-in DC fan
- 1U low profile (HRP□-300 / 450)
- 100% full load burn-in test
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	HRP□-300	HRP□-450	HRP□-600
AC input voltage range	85~264VAC, 120~370VDC		
AC inrush current (max.)	Cold start, 70A at 230VAC		
DC adjustment range	±15% rated output voltage		
Overload Protection	Range	105%~135%	
	Type	Constant current limiting, auto-recovery	
Over voltage protection	115%~145%		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute		
Working temperature	-40~+70°C (refer to output derating curve)		
Safety standards	UL60950-1, TUV EN60950-1 approved		
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN61000-6-2 heavy industry level		
Connection	7P / 11mm pitch terminal block with cover	3+6P / 10&11mm pitch terminal block with cover	
Dimension (LxWxH)(mm)	199x 105x 41	218x 105x 41	218x 105x 63.5
Case No.	980A	995A	977A

300W

HRP□-300

Model No.	Output	Tol.	R&N	Effi.
HRP□-300-3.3	3.3V, 0~60A	±2.5%	80mV	80.0%
HRP□-300-5	5V, 0~60A	±2.0%	90mV	82.0%
HRP□-300-7.5	7.5V, 0~40A	±2.0%	100mV	86.0%
HRP□-300-12	12V, 0~27A	±1.0%	120mV	88.0%
HRP□-300-15	15V, 0~22A	±1.0%	150mV	88.0%
HRP□-300-24	24V, 0~14A	±1.0%	150mV	87.0%
HRP□-300-36	36V, 0~9A	±1.0%	250mV	88.0%
HRP□-300-48	48V, 0~7A	±1.0%	250mV	89.0%

□=blank, G; blank: basic function, G: with 5Vsb & no load <0.5W

600W

HRP□-600

Model No.	Output	Tol.	R&N	Effi.
HRP□-600-3.3	3.3V, 0~120A	±2%	100mV	78.5%
HRP□-600-5	5V, 0~120A	±2%	100mV	82.0%
HRP□-600-7.5	7.5V, 0~80A	±2%	100mV	87.0%
HRP□-600-12	12V, 0~53A	±1%	120mV	88.0%
HRP□-600-15	15V, 0~43A	±1%	150mV	88.0%
HRP□-600-24	24V, 0~27A	±1%	150mV	88.0%
HRP□-600-36	36V, 0~17.5A	±1%	200mV	89.0%
HRP□-600-48	48V, 0~13A	±1%	240mV	89.0%

□=blank, G; blank: basic function, G: with 5Vsb & no load <0.75W

450W

HRP□-450

Model No.	Output	Tol.	R&N	Effi.
HRP□-450-3.3	3.3V, 0~90A	±2%	80mV	80.0%
HRP□-450-5	5V, 0~90A	±2%	80mV	83.0%
HRP□-450-7.5	7.5V, 0~60A	±2%	100mV	86.5%
HRP□-450-12	12V, 0~37.5A	±1%	120mV	88.0%
HRP□-450-15	15V, 0~30A	±1%	150mV	89.0%
HRP□-450-24	24V, 0~18.8A	±1%	150mV	88.0%
HRP□-450-36	36V, 0~12.5A	±1%	240mV	89.0%
HRP□-450-48	48V, 0~9.5A	±1%	240mV	89.5%

□=blank, G; blank: basic function, G: with 5Vsb & no load <0.5W



We are a TQM (Total Quality Management) company and ISO-9001 certified since 1994.



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

Enclosed-PFC

100~300W High Reliability Medical Type



Features

- Universal AC input / Full range
- Medical safety approved (MOOP level)
- Low leakage current $\leq 450\mu\text{A}$ ($\leq 300\mu\text{A}$ for MSP-100)
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- 1U low profile
- Built-in constant current limiting circuit
- Built-in remote sense function (MSP-200/300)
- No load power consumption $<0.5\text{W}$
- Built-in remote ON/OFF control
- Built-in 5V/0.3A standby output (MSP-200/300)
- LED indicator for power on
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	MSP-100 NEW	MSP-200 NEW	MSP-300 NEW		
AC input voltage range	85~264VAC, 120~370VDC				
AC inrush current (max.)	Cold start, 65A at 230VAC	Cold start, 70A at 230VAC			
DC adjustment range	$\pm 15\%$ rated output voltage				
Overload protection	Range	105%~135%			
	Type	Constant current limiting, auto-recovery			
Over voltage protection	115%~145%				
Withstand voltage	I/P - O/P: 4kVAC, I/P - FG: 2kVAC, O/P - FG: 0.5kVAC, 1 minute				
Working temperature	-40~+60°C (refer to output derating curve)		-40~+70°C (refer to output derating curve)		
Safety standards	ANSI/AAMI ES60601-1, IEC60601-1 approved				
EMC standards	EN55011 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2				
Connection	7P / 9.5mm pitch terminal block with cover		7P / 11mm pitch terminal block with cover		
Dimension (LxWxH)(mm)	159x 97x 38	199x 98x 38	199x 105x 41		
Case No.	901I	902E	980A		

100W

NEW MSP-100

Model No.	Output	Tol.	R&N	Effi.
MSP-100-3.3	3.3V, 0~20A	+2.5%, -3.5%	80mV	78.0%
MSP-100-5	5V, 0~17A	$\pm 2.5\%$	80mV	83.0%
MSP-100-7.5	7.5V, 0~13.5A	$\pm 2.5\%$	100mV	84.0%
MSP-100-12	12V, 0~8.5A	$\pm 1.5\%$	120mV	87.5%
MSP-100-15	15V, 0~7A	$\pm 1.5\%$	150mV	88.0%
MSP-100-24	24V, 0~4.5A	$\pm 1.5\%$	150mV	88.5%
MSP-100-36	36V, 0~2.9A	$\pm 1.5\%$	200mV	89.0%
MSP-100-48	48V, 0~2.2A	$\pm 1.5\%$	240mV	90.0%

300W

NEW MSP-300

Model No.	Output	Tol.	R&N	Effi.
MSP-300-3.3	3.3V, 0~60A	$\pm 2.5\%$	80mV	80.0%
MSP-300-5	5V, 0~60A	$\pm 2\%$	90mV	82.0%
MSP-300-7.5	7.5V, 0~40A	$\pm 2\%$	100mV	86.0%
MSP-300-12	12V, 0~27A	$\pm 1\%$	120mV	88.0%
MSP-300-15	15V, 0~22A	$\pm 1\%$	150mV	88.0%
MSP-300-24	24V, 0~14A	$\pm 1\%$	150mV	87.0%
MSP-300-36	36V, 0~9A	$\pm 1\%$	250mV	88.0%
MSP-300-48	48V, 0~7A	$\pm 1\%$	250mV	89.0%

200W

NEW MSP-200

Model No.	Output	Tol.	R&N	Effi.
MSP-200-3.3	3.3V, 0~40A	$\pm 2\%$	80mV	80.0%
MSP-200-5	5V, 0~35A	$\pm 2\%$	90mV	84.0%
MSP-200-7.5	7.5V, 0~26.7A	$\pm 2\%$	100mV	86.0%
MSP-200-12	12V, 0~16.7A	$\pm 1\%$	120mV	88.0%
MSP-200-15	15V, 0~13.4A	$\pm 1\%$	150mV	88.0%
MSP-200-24	24V, 0~8.4A	$\pm 1\%$	150mV	88.0%
MSP-200-36	36V, 0~5.7A	$\pm 1\%$	250mV	89.0%
MSP-200-48	48V, 0~4.3A	$\pm 1\%$	250mV	89.0%



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



We are a TQM (Total Quality Management) company and ISO-9001 certified since 1994.



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.



Features

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Output voltage programmable from 20~110% by 1~5.5VDC external control signal**
- Forced air cooling by built-in DC fan (except for SPV-150)
- Cooling by free air convection (SPV-150)
- Built-in remote sense and ON/OFF control (SPV-1500)
- Built-in 12V/0.1A auxiliary output and current sharing up to 4500W (SPV-1500)
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	SPV-150	SPV-300	SPV-1500
AC input voltage range	88~264VAC, 124~370VDC		90~264VAC, 127~370VDC
AC inrush current (max.)	Cold start, 40A at 230VAC		Cold Start, 60A at 230VAC
DC adjustment range	-15%~+10% rated output voltage		±5% rated output voltage
Overload protection	Range Type	105%~150% Constant current limiting, auto-recovery	105%~135%
Over voltage protection	115%~140%		120%~140%
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute		
Working temperature	-20~+65°C (refer to output derating curve)		-20~+70°C
Safety standards	UL60950-1, TUV EN60950-1 approved		
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN55024, light industry level, criteria A		
Connection	9P / 9.5mm pitch terminal block with cover		3P / 13mm pitch terminal block with cover for input; copper pillars for output
Dimension (LxWxH)(mm)	215x115x50		278x127x83.5
Case No.	912L	912G	943A
Packing	12pcs / 14kg		4pcs / 13kg

150W



Model No.	Output	Tol.	R&N	Effi.
SPV-150-12	12V, 0~12.5A	±1%	150mV	82%
SPV-150-24	24V, 0~6.25A	±1%	150mV	83%
SPV-150-48	48V, 0~3.125A	±1%	240mV	83%

1500W



Model No.	Output	Tol.	R&N	Effi.
SPV-1500-12	12V, 0~125A	±1%	150mV	86.5%
SPV-1500-24	24V, 0~63A	±1%	150mV	90.0%
SPV-1500-48	48V, 0~32A	±1%	200mV	90.0%

300W



Model No.	Output	Tol.	R&N	Effi.
SPV-300-12	12V, 0~25A	±1%	150mV	83.5%
SPV-300-24	24V, 0~12.5A	±1%	150mV	85.0%
SPV-300-48	48V, 0~6.25A	±1%	240mV	86.5%



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.

150W Single Output with PFC Function



220x 62x 32 mm

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Conformal coating**
- High efficiency up to 90%**
- Protections:
Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection for 150W and 200W with 30CFM forced air
- 1U low profile: 32mm
- Built-in remote sense function
- LED indicator for power on
- Suitable for moving sign application**
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 70A at 230VAC

DC adjustment range 2.5V: 2.35~2.75V; 3.8V: 3.4~4.2V; 5V: 4.5~5V

Overload protection 140%~180% hiccup mode, auto-recovery

Over voltage protection 2.5V: 3.2~3.7V; 3.8V: 4.7~5.7V; 5V: 5.7~7V

hiccup mode, auto-recovery

Setup, rise, hold up time 2000ms, 100ms, 16ms at full load and 230VAC

Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC

Working temperature -30°C~+70°C (refer to output derating curve)

Safety standards UL60950-1, EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Packing 0.61kg ; 24pcs / 15.6kg / 1.63CUFT

Model No.	Output(Rated/Peak)	Tol.	R&N	Effi.
HSP-150-2.5	2.5V, 0~30A / 40A	±2%	80mV	86%
HSP-150-3.8	3.8V, 0~30A / 40A	±2%	100mV	88%
HSP-150-5	5V, 0~30A / 40A	±2%	100mV	90%

250W Single Output with PFC Function



199x 105x 41 mm

- Universal AC input / Full range
- Built-in active PFC function
- Conformal coating**
- High efficiency up to 87%**
- Protections:
Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- 1U low profile: 41mm
- Built-in remote sense function
- LED indicator for power on
- Suitable for moving sign application**
- 3 years warranty

AC input voltage range 85~264VAC; 120~370VDC

DC adjustment range 2.5V: 2.3~2.8V; 3.6V: 3.24~3.96V; 5V: 4.5~5.5V

AC inrush current Cold start, 70A at 230VAC

Overload protection 105%~135% hiccup mode, auto-recovery

Over voltage protection 2.5V: 2.88~3.38V; 3.6V: 4.14~4.86V; 5V: 5.75~6.75V

shut down O/P voltage, re-power on to recover

Setup, rise, hold up time 3000ms, 50ms, 16ms at full load and 230VAC

Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC

Working temperature -40°C~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 Class B, EN61000-3-2,3, EN55024, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2

Packing 0.97kg ; 16pcs / 16.5kg / 0.87CUFT

Model No.	Output	Tol.	R&N	Effi.
HSP-250-2.5	2.5V, 0~50A	±2%	100mV	79%
HSP-250-3.6	3.6V, 0~50A	±2%	100mV	83%
HSP-250-5	5V, 0~50A	±2%	100mV	87%

190W Dual Output with PFC Function



215x 115x 36 mm

- Universal AC input / Full range
- Built-in active PFC function
- Conformal coating**
- High efficiency up to 86%**
- Protections:
Short circuit / Overload / Over voltage / Over temperature
- Convection cooling
- 1U low profile: 36mm
- Suitable for moving sign application**
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC

DC adjustment range V1: 3.6~4V; V2: 2.5~3V

AC inrush current Cold start, 45A at 230VAC

Overload protection V1+V2: 105%~150%, V2: 125%~170% hiccup mode, auto-recovery

Over voltage protection V1: 4.37~5.13V, V2: 3.22~3.78V shut down O/P voltage, re-power on to recover

Setup, rise, hold up time 1000ms, 50ms, 16ms at full load and 230VAC

Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC

Working temperature -30°C~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 Class B, EN61000-3-2,3, EN55024, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2

Packing 0.95kg ; 15pcs / 15.3kg / 0.7CUFT

240W Dual Output with PFC Function



215x 115x 36 mm

- Universal AC input / Full range
- Built-in active PFC function
- Conformal coating**
- High efficiency up to 84%**
- Protections:
Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- 1U low profile: 36mm
- Suitable for moving sign application**
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC

DC adjustment range V1: 3.6~4V; V2: 2.5~3V

AC inrush current Cold start, 45A at 230VAC

Overload protection V1+V2: 105%~150%, V2: 125%~170% hiccup mode, auto-recovery

Over voltage protection V1: 4.37~5.13V, V2: 3.22~3.78V shut down O/P voltage, re-power on to recover

Setup, rise, hold up time 1000ms, 50ms, 16ms at full load and 230VAC

Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC

Working temperature -30°C~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 Class B, EN61000-3-2,3, EN55024, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2

Packing 1kg ; 15pcs / 16kg / 0.7CUFT

Model No.	Output	Tol.	R&N	Effi.	Max.
HDP-240	3.8V, 0~50A	±2%	100mV	84%	241W
	2.8V, 0~27.5A	±2%	100mV		

U-bracket-PFC

150~500W Single Output



USP-500

USP-350

USP-225

USP-150

Features

- Universal AC input / Full range
- Built-in active PFC
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Output wattage:
USP-150: 150W convection
USP-225: 150W convection, 225W with 18CFM forced air
USP-350: 300W convection, 350W with 23.5CFM forced air
USP-500: 400W convection, 500W with 23.5CFM forced air
- High power density: 5.5W/in³ (USP-150); 4.7W/in³ (USP-225); 6.32W/in³ (USP-350); 6.2W/in³ (USP-500)
- U-bracket low profile: 33mm(USP-150); 38mm(USP-225/300); 41mm(USP-500)
- Built-in remote ON/OFF control, remote sense, DC OK signal (USP-500)
- Optional current sharing(1+1) for USP-500-24/48**
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	USP-150	USP-225	USP-350	USP-500
AC input voltage range	90~295VAC, 127~417VDC	90~264VAC, 127~370VDC		
AC inrush current (max.)	Cold start, 65A at 230VAC	15A at 115VAC, 30A at 230VAC	22A at 115VAC, 44A at 230VAC	30A at 115VAC, 50A at 230VAC
DC adjustment range	±10% rated output voltage			
Overload protection	Range: 110%~160% Type: Hiccup mode, auto-recovery	105%~150%	105%~130%	Constant current, shut off after 3 sec.
Over voltage protection	Range: 110%~135% Type: Shut off, AC recycle to re-start	110%~135%	110%~140%	115%~135%
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute			
Working temperature	-30~+65°C	-20~+65°C	-10~+65°C	-20~+70°C
Vibration	10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes			
Safety standards	UL60950-1, TUV EN60950-1(except for USP-150) approved			
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11			
Connection	JST: SVH-21T-P1.1, 4P/7.62mm pitch terminal block	20P/2.54mm pitch, Molex 39-29-9206	5+9Px2/3.96mm pitch, JST: B5P/B9Px2-VH	3+8P/8.5mm pitch terminal block with cover
Dimension (LxWxH)(mm)	215x 67.4x 33	202x 101.5x 38	235.2x 101.5x 38	254x 127x 41

150W



Model No.	Output	Tol.	R&N	Effi.
USP-150-12	12V, 0~12.5A	±2%	100mV	91.5%
USP-150-15	15V, 0~10.0A	±2%	150mV	91.5%
USP-150-24	24V, 0~6.30A	±2%	150mV	93.0%
USP-150-36	36V, 0~4.20A	±2%	250mV	93.0%
USP-150-48	48V, 0~3.20A	±2%	250mV	93.0%

350W



Model No.	Output	Tol.	R&N	Effi.
USP-350-3.3	3.3V, 0~70.0A	±2%	80mV	78%
USP-350-5	5V, 0~70.0A	±2%	80mV	84%
USP-350-12	12V, 0~29.2A	±2%	100mV	88%
USP-350-15	15V, 0~23.4A	±2%	100mV	88%
USP-350-24	24V, 0~14.6A	±2%	150mV	88%
USP-350-48	48V, 0~7.30A	±2%	150mV	89%

225W



Model No.	Output	Tol.	R&N	Effi.
USP-225-3.3	3.3V, 0~40.0A	±2%	100mV	72%
USP-225-5	5V, 0~40.0A	±2%	100mV	77%
USP-225-12	12V, 0~18.7A	±2%	100mV	83%
USP-225-15	15V, 0~15.0A	±2%	100mV	84%
USP-225-24	24V, 0~9.40A	±2%	150mV	85%
USP-225-48	48V, 0~4.70A	±2%	250mV	86%

500W



Model No.	Output	Tol.	R&N	Effi.
USP-500-5	5V, 0~80.0A	±2%	80mV	85%
USP-500-12	12V, 0~42.0A	±2%	100mV	90%
USP-500-15	15V, 0~33.5A	±2%	100mV	90%
USP-500-24	24V, 0~21.0A	±2%	150mV	89%
USP-500-48	48V, 0~10.5A	±2%	150mV	90%



MP450 (450W, 5 SLOT)

MP650 (650W, 5 SLOT)

MP1K0 (1000W, 7 SLOT)



MS-75

MS-150


MS-300

MD-100

■ Description

Modular series are switching power supplies with modular design that consist of two stages: front-end PFC and output modules. Using ZVS (Zero Voltage Switching) technology to realize the power factor correction, the line input is rectified into high DC voltage (around 390VDC) by the front-end PFC stage, and then the DC output modules will transfer the operating voltage into all kinds of DC output voltages from 1.6V~53V. Right now we offer 75W, 150W, 300W single output modules and 100W dual output modules to fulfill all kinds of applications up to 14 isolated outputs. There are millions of combinations available for the Modular series. Users can configure the DC outputs they need and get the fastest solution for their own power requirement with safety and EMC certificates. No more NRE / safety application charges and long period of waiting for certificates! Providing standard products as usual, MEAN WELL offer you a revolutionary standard power solution that fulfills your custom-made request!

■ Output Configuration Guide

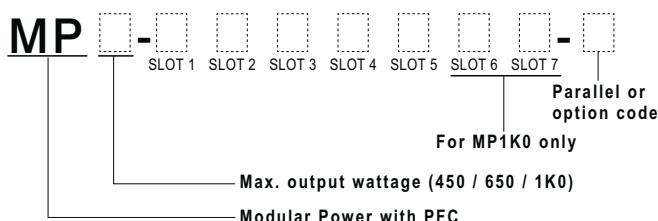

Example:

MP650-A 2 E H U
 SLOT5-O/P:24V@2.5A, 5V@8A
 SLOT4-O/P:24V@6.5A
 SLOT2,3-O/P:12V@25A
 SLOT-O/P:2V@25A

■ Features

- Millions of output configuration is available
- Using ZVS technology to reduce power dissipation and improve efficiency
- Universal AC input / Full range
- Built-in active PFC compliance to EN61000-3-2
- Built-in constant current limiting circuit for single output modules
- Remote control on each output module
- Remote sense on each output module (MS-75/150/300)
- Short circuit / Overload / Over voltage protections for all modules
- Built-in parallel function for MS-300(up to 3 units)
- Cooling by built-in DC fan with fan alarm function
- Additional 12V/0.1A auxiliary output for remote control
- 3 years warranty

Modular Series



General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	MP450	MP650	MP1K0
AC input voltage range	85~264VAC or 120~370VDC		
Power Factor	PF >0.95 / 230VAC, PF > 0.98 / 115VAC at full load		
AC inrush current (max.)	Cold start, 40A at 230VAC	Cold start, 50A at 230VAC	Cold start, 40A at 230VAC
Max output voltage	450W	650W	1000W
Efficiency (typical)	83%	85%	84%
Over temperature protection	Output shutdown, auto-recovery		
Fan alarm	Output shutdown when fan malfunction		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute		
Working temperature	-20~+50°C@100%, +70°C @ 50% load		
Safety standards	UL60950-1, TUV EN60950-1		
EMC standards	Compliance to EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN55024 light industry level, criteria A		
Connection	Input side: 3P/10mm pitch terminal block & JST B3B-XH		
Dimension (LxWxH)(mm)	254x 127x 63.5	278x 127x 63.5	278x 177.8x 63.5

MS-75: 1-SLOT single output (75W max.)

Item Code	Output	★Peak I	Vdc adj.	Tol.	R&N.
L	3.3V, 0~15A	17.3A	2.6~4.0V	±2%	80mV
M	5V, 0~15A	17.3A	4.0~6.0V	±2%	80mV
N	12V, 0~6.3A	7.30A	9.0~13.2V	±1%	150mV
O	15V, 0~5.0A	5.80A	13.2~16.8V	±1%	150mV
P	24V, 0~3.2A	3.70A	20.0~26.4V	±1%	150mV
Q	48V, 0~1.6A	1.80A	40.0~53.0V	±1%	250mV

MS-150: 1-SLOT single output (150W max.)

Item Code	Output	★Peak I	Vdc adj.	Tol.	R&N.
A	2V, 0~25A	30.0A	1.6~2.6V	±3%	50mV
B	3.3V, 0~25A	30.0A	2.6~4.0V	±2%	80mV
C	5V, 0~25A	30.0A	4.0~6.0V	±2%	80mV
D	7.5V, 0~18A	20.7A	6.0~9.0V	±2%	100mV
E	12V, 0~13A	15.0A	9.0~13.2V	±1%	150mV
F	15V, 0~10A	11.5A	13.2~16.8V	±1%	150mV
G	18V, 0~8.5A	9.80A	16.8~20.0V	±1%	150mV
H	24V, 0~6.5A	7.50A	20.0~26.4V	±1%	150mV
I	27V, 0~5.8A	6.70A	25.0~31.0V	±1%	150mV
J	33V, 0~4.7A	5.40A	30.0~40.0V	±1%	250mV
K	48V, 0~3.2A	3.68A	40.0~53.0V	±1%	250mV

MS-300: 2-SLOT parallelable single output (300W max.)

Item Code	Output	★Peak I	Vdc adj.	Tol.	R&N.
2A	2V, 0~50A	57.5A	1.6~2.6V	±3%	80mV
2B	3.3V, 0~50A	57.5A	2.6~4.0V	±2%	80mV
2C	5V, 0~50A	57.5A	4.0~6.0V	±2%	80mV
2D	7.5V, 0~40A	46.0A	6.0~9.0V	±2%	100mV
2E	12V, 0~25A	29.0A	9.0~13.2V	±1%	150mV
2F	15V, 0~20A	23.0A	13.2~16.8V	±1%	150mV
2G	18V, 0~16.7A	19.2A	16.8~20.0V	±1%	150mV
2H	24V, 0~12.5A	14.4A	20.0~26.4V	±1%	150mV
2I	27V, 0~11.2A	12.9A	25.0~31.0V	±1%	200mV
2J	33V, 0~9.1A	10.5A	30.0~40.0V	±1%	250mV
2K	48V, 0~6.3A	7.2A	40.0~53.0V	±1%	300mV


MD-100: 1-SLOT isolated dual output (100W max.)

Item Code	Output	Vdc adj.	Tol.	R&N.	Max.
R	5V, 2.0~10A	4.75~5.5V	±3%	100mV	90.0W
	5V, 0.0~8.0A	4.75~5.5V	±3%	100mV	
S	5V, 2.0~10A	4.75~5.5V	±3%	100mV	100.4W
	12V, 0.0~5.8A	11.4~13.2V	±3%	150mV	
T	5V, 2.0~10A	4.75~5.5V	±3%	100mV	101.0W
	15V, 0.0~4.7A	14.2~16.5V	±3%	150mV	
U	24V, 0.5~3.0A	22.8~26.4V	±3%	200mV	100.0W
	5V, 0.0~10A	4.75~5.5V	±3%	100mV	
V	24V, 0.6~3.0A	22.8~26.4V	±2%	240mV	100.8W
	12V, 0.0~4.7A	11.4~13.2V	±3%	120mV	
W	12V, 1.0~5.0A	11.4~13.2V	±2%	120mV	100.8W
	12V, 0.0~5.8A	11.4~13.2V	±3%	120mV	
X	15V, 1.0~4.7A	14.2~16.5V	±2%	150mV	100.5W
	15V, 0.0~4.7A	14.2~16.5V	±3%	150mV	


Parallel Connection Accessory



Series Connection Accessory

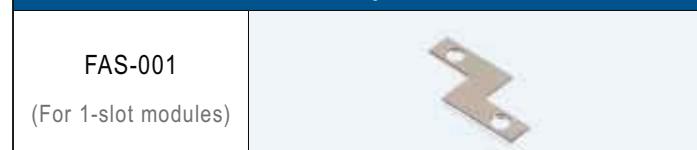

FAS-002




★Peak I: 35% duty cycle maximum within every 10 seconds. Average output power should not exceed the rated power.

★Please use MP450-CNPOQ, MP650-A2EHU, MP1K0-2C2CEKL-1....etc. as the order code. For more detail information about technical issues, please refer to the user manual.

★Please refer to the user manual for more detail information about parallel connection and the parallel codes. About series connection, please contact us or your local MEAN WELL distributor for more details.

Harsh Environment

40~60W Single Output

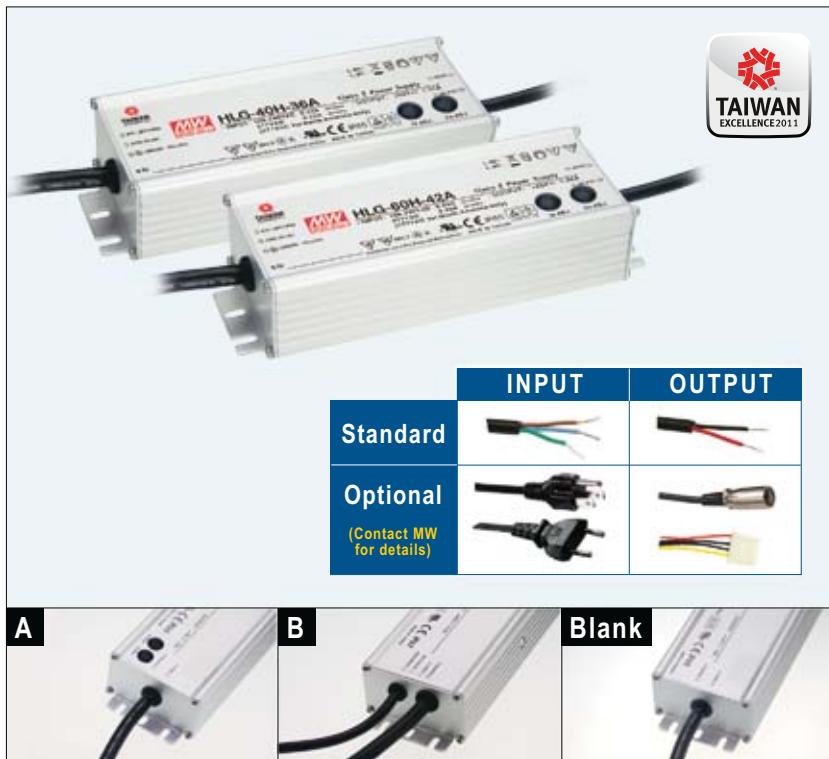

Features

- IP67 / IP65 design for indoor or outdoor installations
- Universal AC input 90~305VAC
- Built-in active PFC function
- High efficiency up to 90.5%
- Fanless design, cooling by free air convection
- 40~+70°C wide operating range
- Withstand 5G vibration test
- Meet 4kV surge immunity level (IEC61000-4-5)
- Built-in constant current limiting circuit
- Aluminum case and filling with heat-conducted glue
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Multiple models for choice:
 - A-Type:** IP65 rated. Vo and Io can be adjusted through internal potentiometer
 - B-Type:** IP67 rated and built-in 3 in 1 dimming function (1~10VDC, PWM signal, or resistance)
 - Blank-Type:** IP67 rated. Cable for I/O connection
- Suitable for general industrial applications at high/low temperature, high dust, high moisture, high vibration, or outdoor environment
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	HLG-40H		HLG-60H	
AC input voltage range	90~305VAC ; 127~431VDC			
AC inrush current (max.)	Cold start, 70A at 230VAC			
DC adjustment range	$\pm 10\%$ rated output voltage (A-Type only)			
Current adjustment range	60%~100% rated output current adjustable by internal potentiometer (A-Type only)			
Over current protection	95%~108% constant current limiting, auto-recovery			
Over voltage protection	109%~145% rated output voltage, shut off, re-power on to recover			
Setup, rise, hold up time	1000ms, 80ms, 16ms at full load and 230VAC			
Withstand voltage	I/P-O/P: 3.75kVAC, I/P-FG: 1.88kVAC, O/P-FG: 0.5kVAC			
Working temperature	-40~+70°C (refer to output derating curve)			
Safety standards	UL8750, TUV EN61347-1, EN61347-2-13, PSE J61347-1, J61347-2-13 approved; Design refer to UL60950-1, EN60950-1			
EMC standards	EN55015, EN61000-3-2 class C, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547			
Connection	Input	UL rated, SJTW 18AWGx3C (30cm)		
	Output	A/Blank-Type: SVT 18AWGx2C (30cm); B-Type: SVT 18AWGx2C (30cm)+UL2517 18AWGx2C (30cm)		
Dimension (LxWxH)(mm)	171x 61.5x 36.8			

HLG-40H Series



Model No.	Output	Tol.	R&N	Effi.
HLG-40H-12(A)	12V, 0~3.33A	$\pm 2.5\%$	150mV	86.5%
HLG-40H-15(A)	15V, 0~2.67A	$\pm 2.0\%$	150mV	86.5%
HLG-40H-20(A)	20V, 0~2.00A	$\pm 1.0\%$	150mV	88.0%
HLG-40H-24(A)	24V, 0~1.67A	$\pm 1.0\%$	200mV	88.0%
HLG-40H-30(A)	30V, 0~1.34A	$\pm 1.0\%$	200mV	88.5%
HLG-40H-36(A)	36V, 0~1.12A	$\pm 1.0\%$	200mV	88.5%
HLG-40H-42(A)	42V, 0~0.96A	$\pm 1.0\%$	200mV	88.5%
HLG-40H-48(A)	48V, 0~0.84A	$\pm 1.0\%$	300mV	89.5%
HLG-40H-54(A)	54V, 0~0.75A	$\pm 1.0\%$	300mV	89.5%

(○ = A, B or Blank)

HLG-60H Series



Junction Box for HLG Series



- Optional junction box available for HLG-80H~320H series (A/Blank-Type only). Please contact MEAN WELL for details.
- "UL8750 listed" safety & IP66 approved for HLG-80H-□BL



	INPUT	OUTPUT
Standard		
Optional (Contact MW for details)		



Features

- IP67 / IP65 design for indoor or outdoor installations
- Universal AC input 90~305VAC
- Built-in active PFC function
- High efficiency up to 93.5%
- Fanless design, cooling by free air convection
- 40~+70°C wide operating range
- Withstand 5G vibration test
- Meet 4kV surge immunity level (IEC61000-4-5)
- Built-in constant current limiting circuit
- Aluminum case and filling with heat-conducted glue
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Multiple models for choice:
 - A-Type:** IP65 rated. Vo and Io can be adjusted through internal potentiometer
 - B-Type:** IP67 rated and built-in 3 in 1 dimming function (1~10VDC, PWM signal, or resistance)
 - Blank-Type:** IP67 rated. Cable for I/O connection
- Optional CQC models available (HLG-100H/120H-A/Blank type)
- Suitable for general industrial applications at high/low temperature, high dust, high moisture, high vibration, or outdoor environment
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	HLG-80H	HLG-100H	HLG-120H						
AC input voltage range	90~305VAC ; 127~431VDC								
AC inrush current (max.)	Cold start, 70A at 230VAC	Cold start, 75A at 230VAC							
DC adjustment range	±10% rated output voltage (A-Type only)								
Current adjustment range	60%~100% rated output current adjustable by internal potentiometer (A-Type only)								
Over current protection	95%~108% constant current limiting, auto-recovery								
Over voltage protection	110%~140% rated output voltage								
Setup, rise, hold up time	1000ms, 80ms, 16ms at full load and 230VAC	2500ms, 50ms, 16ms at full load and 230VAC							
Withstand voltage	I/P-O/P: 3.75kVAC, I/P-FG: 1.88kVAC, O/P-FG: 0.5kVAC								
Working temperature	-40~+70°C (refer to output derating curve)								
Safety standards	UL8750, TUV EN61347-1, EN61347-2-13, PSE J61347-1, J61347-2-13 approved; UL8750 listed for HLG-80H-□BL only; Design refer to UL60950-1, EN60950-1								
EMC standards	EN55015, EN55022 class B (except for HLG-80H), EN61000-3-2 class C, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547								
Connection	<table border="1"> <tr> <td>Input</td> <td>UL rated, SJTW 18AWGx3C (30cm)</td> </tr> <tr> <td>Output</td> <td>A/Blank-Type: SVT 18AWGx2C (30cm); B-Type: SVT 18AWGx2C (30cm)+UL2517 18AWGx2C (30cm)</td> </tr> </table>	Input	UL rated, SJTW 18AWGx3C (30cm)	Output	A/Blank-Type: SVT 18AWGx2C (30cm); B-Type: SVT 18AWGx2C (30cm)+UL2517 18AWGx2C (30cm)	<table border="1"> <tr> <td>A/Blank-Type: SJTW 14AWGx2C (30cm) ;</td> </tr> <tr> <td>B-Type: SJTW 14AWGx2C (30cm)+SJT 18AWGx2C(30cm)</td> </tr> </table>	A/Blank-Type: SJTW 14AWGx2C (30cm) ;	B-Type: SJTW 14AWGx2C (30cm)+SJT 18AWGx2C(30cm)	
Input	UL rated, SJTW 18AWGx3C (30cm)								
Output	A/Blank-Type: SVT 18AWGx2C (30cm); B-Type: SVT 18AWGx2C (30cm)+UL2517 18AWGx2C (30cm)								
A/Blank-Type: SJTW 14AWGx2C (30cm) ;									
B-Type: SJTW 14AWGx2C (30cm)+SJT 18AWGx2C(30cm)									
Dimension (LxWxH)(mm)	195.6x 61.5x 38.8	220x 68x 38.8							

HLG-80H Series




Model No.	Output	Tol.	R&N	Effi.
HLG-80H-12(A)	12V, 0~5.0A	±2.5%	150mV	88.0%
HLG-80H-15(A)	15V, 0~5.0A	±2.0%	150mV	89.0%
HLG-80H-20(A)	20V, 0~4.0A	±1.0%	150mV	90.0%
HLG-80H-24(A)	24V, 0~3.4A	±1.0%	150mV	90.5%
HLG-80H-30(A)	30V, 0~2.7A	±1.0%	200mV	91.0%
HLG-80H-36(A)	36V, 0~2.3A	±1.0%	200mV	91.0%
HLG-80H-42(A)	42V, 0~1.95A	±1.0%	200mV	91.0%
HLG-80H-48(A)	48V, 0~1.7A	±1.0%	200mV	91.0%
HLG-80H-54(A)	54V, 0~1.5A	±1.0%	200mV	91.0%

Model No. Output Tol. R&N Effi.

HLG-100H-42(A)	42V, 0~2.28A	±1.0%	200mV	93%
HLG-100H-48(A)	48V, 0~2.0A	±1.0%	200mV	93%
HLG-100H-54(A)	54V, 0~1.77A	±1.0%	200mV	93%

○ = A , B or Blank

HLG-120H Series



Model No.	Output	Tol.	R&N	Effi.
★ HLG-120H-12(A)	12V, 0~10A	±2.5%	150mV	92.0%
HLG-120H-15(A)	15V, 0~8.0A	±2.0%	150mV	92.0%
HLG-120H-20(A)	20V, 0~6.0A	±1.0%	150mV	93.0%
★ HLG-120H-24(A)	24V, 0~5.0A	±1.0%	150mV	93.0%
HLG-120H-30(A)	30V, 0~4.0A	±1.0%	200mV	93.0%
HLG-120H-36(A)	36V, 0~3.4A	±1.0%	200mV	93.0%
HLG-120H-42(A)	42V, 0~2.9A	±1.0%	200mV	93.0%
★ HLG-120H-48(A)	48V, 0~2.5A	±1.0%	200mV	93.5%
HLG-120H-54(A)	54V, 0~2.3A	±1.0%	200mV	93.5%

○ = A , B or Blank

★ HLG-120H-12A/24A/48A are our popular models. We will keep sufficient stock for prompt delivery of high quantity orders.


HLG-100H Series



Model No.	Output	Tol.	R&N	Effi.
HLG-100H-20(A)	20V, 0~4.8A	±1.0%	150mV	93%
HLG-100H-24(A)	24V, 0~4.0A	±1.0%	150mV	93%
HLG-100H-30(A)	30V, 0~3.2A	±1.0%	200mV	93%
HLG-100H-36(A)	36V, 0~2.65A	±1.0%	200mV	93%

Harsh Environment

150~240W Single Output

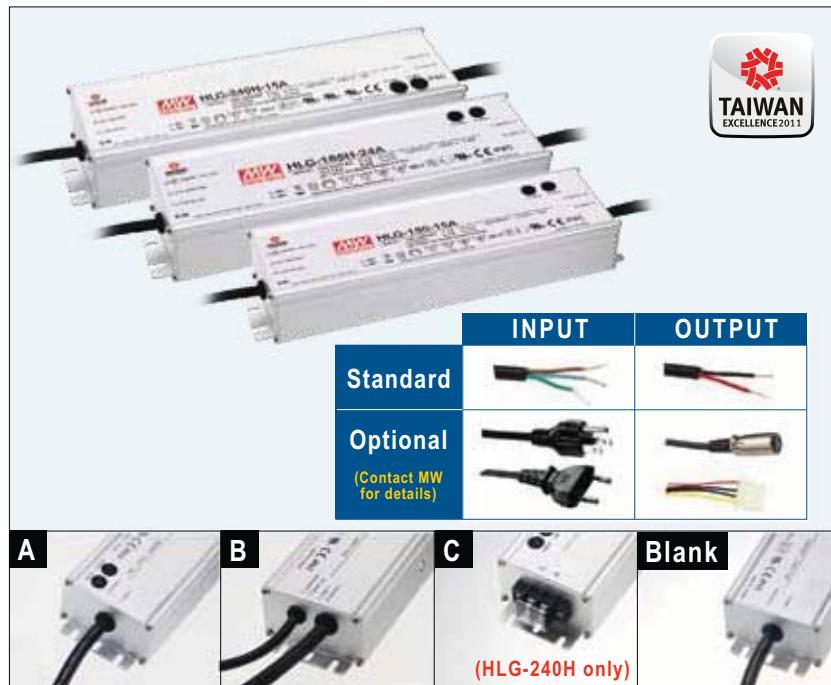

Features

- IP67 / IP65 design for indoor or outdoor installations
- Universal AC input 90~305VAC
- Built-in active PFC function
- High efficiency up to 94%
- Fanless design, cooling by free air convection
- 40~+70°C wide operating range
- Withstand 5G vibration test
- Meet 4kV surge immunity level (IEC61000-4-5)
- Built-in constant current limiting circuit
- Aluminum case and filling with heat-conducted glue
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Multiple models for choice:
 - A-Type:** IP65 rated. Vo and Io can be adjusted through internal potentiometer
 - B-Type:** IP67 rated and built-in 3 in 1 dimming function (1~10VDC, PWM signal, or resistance)
 - C-Type:** Terminal block for I/O connection (HLG-240H)
 - Blank-Type:** IP67 rated. Cable for I/O connection
- Suitable for general industrial applications at high/low temperature, high dust, high moisture, high vibration, or outdoor environment
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	HLG-150H	HLG-185H	HLG-240H				
AC input voltage range	90~305VAC ; 127~431VDC						
AC inrush current (max.)	Cold start, 75A at 230VAC						
DC adjustment range	±10% rated output voltage (A-Type only)	±6% rated output voltage (A-Type only)					
Current adjustment range	60%~100% rated output current adjustable by internal potentiometer (A-Type only)						
Over current protection	95%~108% constant current limiting, auto-recovery						
Over voltage protection	110%~140% rated output voltage						
Setup, rise, hold up time	2500ms, 80ms, 16ms at full load and 230VAC	2500ms, 80ms, 15ms at full load and 230VAC					
Withstand voltage	I/P-O/P: 3.75kVAC, I/P-FG: 1.88kVAC, O/P-FG:0.5kVAC						
Working temperature	-40~+70°C (refer to output derating curve)						
Safety standards	UL8750, TUV EN61347-1, EN61347-2-13, PSE J61347-1, J61347-2-13 (except for C-Type) approved; UL1012, UL60950-1, TUV EN60950-1 approved for HLG-240H only						
EMC standards	EN55015, EN55022 class B, EN61000-3-2 class C, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547						
Connection	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px 10px;">Input</td> <td style="padding: 2px 10px;">UL rated, SJTW 18AWGx3C (30cm); Terminal block for C-Type (HLG-240H only)</td> </tr> <tr> <td style="padding: 2px 10px;">Output</td> <td style="padding: 2px 10px;">A & Blank-Type: SJTW 14AWGx2C (30cm) ; B-Type: SJTW 14AWGx2C (30cm)+SJT 18AWGx2C (30cm); C-Type: Terminal block (HLG-240H only)</td> </tr> </table>	Input	UL rated, SJTW 18AWGx3C (30cm); Terminal block for C-Type (HLG-240H only)	Output	A & Blank-Type: SJTW 14AWGx2C (30cm) ; B-Type: SJTW 14AWGx2C (30cm)+SJT 18AWGx2C (30cm); C-Type: Terminal block (HLG-240H only)		
Input	UL rated, SJTW 18AWGx3C (30cm); Terminal block for C-Type (HLG-240H only)						
Output	A & Blank-Type: SJTW 14AWGx2C (30cm) ; B-Type: SJTW 14AWGx2C (30cm)+SJT 18AWGx2C (30cm); C-Type: Terminal block (HLG-240H only)						
Dimension (LxWxH)(mm)	A/B/Blank-Type: 228x 68x 38.8	A/B/Blank-Type: 244.2x 68x 38.8 C-Type: 251x 68x 38.8					

HLG-150H Series



Model No.	Output	Tol.	R&N	Effi.
HLG-150H-12(A)	12V, 0~12.5A	±2.5%	150mV	91.5%
HLG-150H-15(A)	15V, 0~10.0A	±2.0%	150mV	92.0%
HLG-150H-20(A)	20V, 0~7.50A	±1.0%	150mV	93.0%
HLG-150H-24(A)	24V, 0~6.30A	±1.0%	150mV	93.0%
HLG-150H-30(A)	30V, 0~5.00A	±1.0%	200mV	93.5%
HLG-150H-36(A)	36V, 0~4.20A	±1.0%	200mV	93.5%
HLG-150H-42(A)	42V, 0~3.60A	±1.0%	200mV	94.0%
HLG-150H-48(A)	48V, 0~3.20A	±1.0%	200mV	94.0%
HLG-150H-54(A)	54V, 0~2.80A	±1.0%	200mV	94.0%

(A) = A, B or Blank

Model No.	Output	Tol.	R&N	Effi.
HLG-185H-42(A)	42V, 0~4.40A	±1.0%	200mV	94.0%
★ HLG-185H-48(A)	48V, 0~3.90A	±1.0%	200mV	94.0%
HLG-185H-54(A)	54V, 0~3.45A	±1.0%	200mV	94.0%

HLG-185H Series



Model No.	Output	Tol.	R&N	Effi.
★ HLG-185H-12(A)	12V, 0~13.0A	±2.5%	150mV	91.5%
HLG-185H-15(A)	15V, 0~11.5A	±2.0%	150mV	92.0%
HLG-185H-20(A)	20V, 0~9.30A	±1.0%	150mV	93.0%
★ HLG-185H-24(A)	24V, 0~7.80A	±1.0%	150mV	93.5%
HLG-185H-30(A)	30V, 0~6.20A	±1.0%	200mV	93.5%
HLG-185H-36(A)	36V, 0~5.20A	±1.0%	200mV	93.5%


HLG-240H Series



Model No.	Output	Tol.	R&N	Effi.
★ HLG-240H-12(A)	12V, 0~16.0A	±2.5%	150mV	90.0%
HLG-240H-15(A)	15V, 0~15.0A	±2.0%	150mV	90.0%
HLG-240H-20(A)	20V, 0~12.0A	±1.0%	150mV	92.0%
★ HLG-240H-24(A)	24V, 0~10.0A	±1.0%	150mV	93.0%
HLG-240H-30(A)	30V, 0~8.00A	±1.0%	200mV	93.0%
HLG-240H-36(A)	36V, 0~6.70A	±1.0%	250mV	93.0%
HLG-240H-42(A)	42V, 0~5.72A	±1.0%	250mV	93.0%
★ HLG-240H-48(A)	48V, 0~5.00A	±1.0%	250mV	93.5%
HLG-240H-54(A)	54V, 0~4.45A	±1.0%	350mV	94.0%

(A) = A, B, C or Blank

★ HLG-185H-12A/24A/48A & HLG-240H-12A/24A/48A are our popular models. We will keep sufficient stock for prompt delivery of high quantity orders.

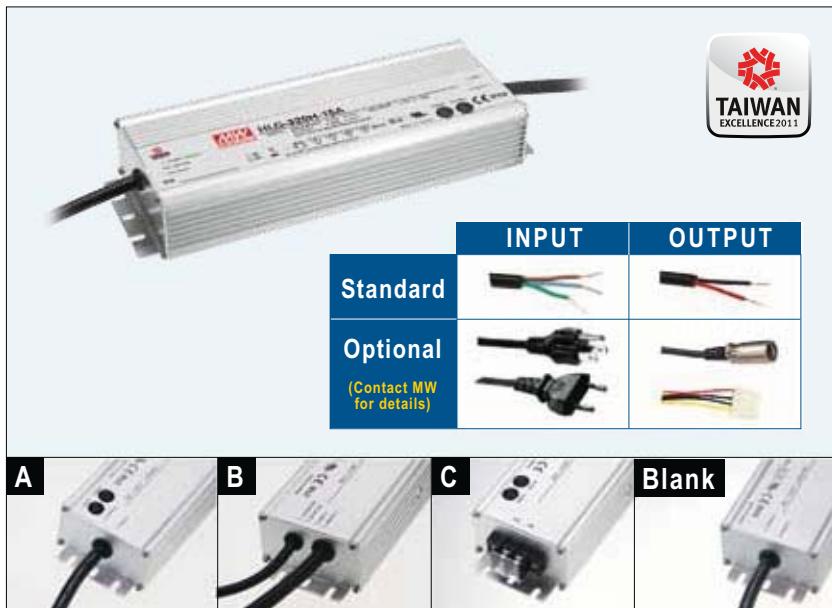

■ Features

- IP67 / IP65 design for indoor or outdoor installations
- Universal AC input 90~305VAC
- Built-in active PFC function
- High efficiency up to 95%
- Fanless design, cooling by free air convection
- -40~+70°C wide operating range
- Withstand 5G vibration test
- Meet 4kV surge immunity level (IEC61000-4-5)
- Built-in constant current limiting circuit
- Aluminum case and filling with heat-conducted glue
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Multiple models for choice:
 - A-Type:** IP65 rated. Vo and Io can be adjusted through internal potentiometer
 - B-Type:** IP67 rated and built-in 3 in 1 dimming function (1~10VDC, PWM signal, or resistance)
 - C-Type:** Terminal block for I/O connection
 - Blank-Type:** IP67 rated. Cable for I/O connection
- Suitable for general industrial applications at high/low temperature, high dust, high moisture, high vibration, or outdoor environment
- 5 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	HLG-320H				
AC input voltage range	90~305VAC ; 127~431VDC				
AC inrush current (max.)	Cold start, 75A at 230VAC				
DC adjustment range	±6% rated output voltage (A-Type only)				
Current adjustment range	60%~100% rated output current adjustable by internal potentiometer (A-Type only)				
Over current protection	95%~108% constant current limiting, auto-recovery				
Over voltage protection	110%~140% rated output voltage				
Setup, rise, hold up time	2500ms, 80ms, 15ms at full load and 230VAC				
Withstand voltage	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working temperature	-40~+70°C (refer to output derating curve)				
Safety standards	UL8750, TUV EN61347-1, EN61347-2-13, PSE J61347-1, J61347-2-13 (except for C-Type) approved				
EMC standards	EN55015, EN55022 class B, EN61000-3-2 class C, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547				
Connection	Input	UL rated, SJTW 18AWGx3C (30cm)			
	Output	A & Blank-Type: SJTW 14AWGx2C (30cm) ; B-Type: SJTW 14AWGx2C (30cm)+SJT 18AWGx2C (30cm); C-Type: Terminal block			
Dimension (LxWxH)(mm)	A/B/Blank-Type: 255x 90x 38.8 ; C-Type: 256x 90x 43.8				

Model No.	Output	Tol.	R&N	Effi.	Model No.	Output	Tol.	R&N	Effi.
HLG-320H-12(A)	12V, 0~22.0A	±3.0%	150mV	91.0%	HLG-320H-36(A)	36V, 0~8.90A	±1.0%	250mV	94.5%
HLG-320H-15(A)	15V, 0~19.0A	±2.0%	150mV	92.5%	HLG-320H-42(A)	42V, 0~7.65A	±1.0%	250mV	95.0%
HLG-320H-20(A)	20V, 0~15.0A	±1.5%	150mV	93.5%	HLG-320H-48(A)	48V, 0~6.70A	±1.0%	250mV	95.0%
HLG-320H-24(A)	24V, 0~13.34A	±1.0%	150mV	94.0%	HLG-320H-54(A)	54V, 0~5.95A	±1.0%	350mV	95.0%
HLG-320H-30(A)	30V, 0~10.7A	±1.0%	200mV	94.0%	○ = A, B, C or Blank				

► Feature Description of HLG Family

Built-in active PFC function and constant current output, full range of HLG family feature with high IP level (IP65/67), 5G anti-vibration, 86.5%~95% of high efficiency, and 4KV anti-surge capability. Along with 5-year warranty as well as fan-less design, the whole family can be cooled by free air convection from -40°C to +70°C ambient temperature, so that they can fit in with all kinds of outdoor/ indoor harsh environments against high dust, high moisture, vibration, high ambient temperature and extremely low temperature, or any machine/ equipment has no noise requirement. In addition to the indoor/ outdoor LED lighting applications , HLG family is also a good solution to be used in harsh environment for industrial related purposes, such as LED electronic display, lawn mower, electric vehicle charging, telecom device, and outdoor electrical equipments...etc..





■ Features

- Universal AC input / Full range
- Installed on DIN rail TS35 / 7.5 or 15
- Protections: Short circuit / Overload / Over voltage
- No load power consumption <0.75W (<1W for MDR-100)
- LED indicator for power on
- Built-in active PFC and over temp. protection (MDR-100)
- DC OK signal output (MDR-10/20)
- DC OK relay contact (MDR-40/60/100)
- Cooling by free air convection
- 100% full load burn-in test
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	MDR-10	MDR-20	MDR-40	MDR-60	MDR-100
AC input voltage range	85~264VAC, 120~370VDC				
AC inrush current	Cold start, 35A at 115VAC, 70A at 230VAC	Cold start, 20A at 115VAC, 40A at 230VAC	Cold start, 30A at 115VAC, 60A at 230VAC		
DC adjustment range	Fixed	±10% rated output voltage	0~+20% rated output voltage		
Overload protection	>105% hiccup mode, auto-recovery	105%~160% constant current limiting, auto-recovery	105%~150% constant current limiting, auto-recovery		
Over voltage protection	115%~135% rated output voltage		125%~150% rated output voltage		
Setup, rise, hold up time	500ms, 30ms, 50ms at full load and 230VAC				3000ms, 50ms, 50ms
Withstand voltage	I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1minute				
Working temperature	-20~+70°C (refer to output derating curve)				-10~+60°C
DC OK signal	Open collector	Open collector	Relay contact		
Safety standards	UL508, TUV EN60950-1, UL60950-1(MDR-40/60) approved, NEC class 2 compliant (MDR-10/20, MDR-40-12/24/48, MDR-60-24/48)				
EMC standards	EN55022 class B, EN61000-3-2,-3, EN61000-4-2,3,4,5,6,8,11, EN61204-3, EN61000-6-2 heavy industry level (MDR-40/60/100)				
Connection	I/P: 3 poles, O/P: 3 poles screw DIN terminal		IP: 3 poles, O/P: 6 poles screw DIN terminal		
Dimension (WxHxD)(mm)	22.5x 90x 100		40x 90x 100		55x 90x 100
Packing	72pcs / 13.2kg	72pcs / 14.7kg	42pcs / 13.6kg	42pcs / 14.8kg	30pcs / 13.6kg

■ MDR-10 Series



■ MDR-60 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-10-5	5V, 0~2.0A	±5%	80mV	77%
MDR-10-12	12V, 0~0.84A	±3%	120mV	81%
MDR-10-15	15V, 0~0.67A	±3%	120mV	81%
MDR-10-24	24V, 0~0.42A	±2%	150mV	84%

■ MDR-60 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-60-5	5V, 0~10.0A	±2%	80mV	78%
MDR-60-12	12V, 0~5.00A	±1%	120mV	86%
MDR-60-24	24V, 0~2.50A	±1%	150mV	88%
MDR-60-48	48V, 0~1.25A	±1%	200mV	87%

■ MDR-20 Series




■ MDR-100 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-20-5	5V, 0~3.0A	±2%	80mV	76%
MDR-20-12	12V, 0~1.67A	±1%	120mV	80%
MDR-20-15	15V, 0~1.34A	±1%	120mV	81%
MDR-20-24	24V, 0~1.00A	±1%	150mV	84%

■ MDR-100 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-100-12	12V, 0~7.5A	±1%	120mV	85%
MDR-100-24	24V, 0~4.0A	±1%	150mV	86%
MDR-100-48	48V, 0~2.0A	±1%	200mV	88%

■ MDR-40 Series



Energy Saving —

We care about energy saving. This logo represents that this model has "low no load power consumption"!

Model No.	Output	Tol.	R&N	Effi.
MDR-40-5	5V, 0~6.00A	±2%	80mV	78%
MDR-40-12	12V, 0~3.33A	±1%	120mV	86%
MDR-40-24	24V, 0~1.70A	±1%	150mV	88%
MDR-40-48	48V, 0~0.83A	±1%	200mV	88%



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



DR-15

DR-30

DR-60

DR-100

■ Features

- Isolation Class II
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Over temperature protection (DR-100)
- No load power consumption<1W (DR-100)
- No load power consumption<0.5W (DR-15)
- Installed on DIN rail TS35 / 7.5 or 15
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 3 years warranty
- Suitable for building automation and control of household appliance

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	DR-15	DR-30	DR-60	DR-100
AC input voltage range	85~264VAC, 120~370VDC		88~264VAC, 124~370VDC	
AC inrush current (max.)	Cold start, 65A at 230VAC	Cold start, 30A at 230VAC	Cold start, 36A at 230VAC	Cold start, 45A at 230VAC
DC adjustment range	±10% rated output voltage			12V: 12~15V, 15V: 15~18V, 24V: 24~29V
Overload Protection	Range	105%~160%		105%~135%
	Type	constant current limiting, auto-recovery		
Over Voltage Protection	Range	115%~135% rated output voltage		125%~155% rated output voltage
	Type	Shut off, clamp by zener diode	Shut down, re-power on to recover	
Withstand voltage	I/P-O/P: 3kVAC			
Working temperature	-20°C~+60°C (refer to output load derating curve)			
Vibration	10~500Hz, 2G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes			
Safety standards	UL60950-1, TUV60950-1 approved			
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, EN61204-3			
Connection	I/P and O/P: 2 poles screw DIN terminal	I/P: 2 poles, O/P: 4 poles screw DIN terminal		
Dimension (WxHxD)(mm)	25x 93x 56	78x 93x 56	78x 93x 56	100x 93x 56
Case No.	985A	918B	918B	970A
Packing	140pcs / 15.0kg	48pcs / 14.0kg	48pcs / 15.4kg	36pcs / 13.6kg

■ 15W

DR-15

DR-60

Model No.	Output	Tol.	R&N	Effi.
DR-15-5	5V, 0~2.40A	±2%	80mV	77.0%
DR-15-12	12V, 0~1.25A	±1%	120mV	84.0%
DR-15-15	15V, 0~1.00A	±1%	120mV	83.5%
DR-15-24	24V, 0~0.63A	±1%	150mV	85.0%

■ 60W

Model No.	Output	Tol.	R&N	Effi.
DR-60-5	5V, 0~6.5A	±2%	80mV	76%
DR-60-12	12V, 0~4.5A	±1%	120mV	82%
DR-60-15	15V, 0~4.0A	±1%	120mV	83%
DR-60-24	24V, 0~2.5A	±1%	150mV	84%

■ 30W

DR-30

DR-100

Model No.	Output	Tol.	R&N	Effi.
DR-30-5	5V, 0~3.0A	±2%	80mV	74%
DR-30-12	12V, 0~2.0A	±1%	120mV	81%
DR-30-15	15V, 0~2.0A	±1%	120mV	82%
DR-30-24	24V, 0~1.5A	±1%	150mV	83%

Model No.	Output	Tol.	R&N	Effi.
DR-100-12	12V, 0~7.5A	±2%	120mV	87%
DR-100-15	15V, 0~6.5A	±1%	120mV	87%
DR-100-24	24V, 0~4.2A	±1%	150mV	89%



We provide specification, drawing, test report and more information, please visit our website — <http://www.meanwell.com>



Energy Saving —

We care about energy saving. This logo represents that this model has "low no load power consumption"!



■ Features

- Universal AC input / Full range (DR-45/75, DRP-240)
- AC input selectable by switch (DR-120, DRP-480S)
- AC input 180~264VAC only (DRP-480)
- Built-in active PFC function (DRP-240)
- Built-in passive PFC function compliance to EN61000-3-2 (480W models)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS35 / 7.5 or 15
- UL508 (industrial control equipment) listed
- 100% full load burn-in test
- LED indicator for power on
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	DR-45	DR-75	DR-120	DRP-240	DRP-480	DRP-480S
AC input voltage range	85~264VAC(DR-45/75, DRP-240); 90~132/180~264VAC selectable by switch (DR-120, DRP-480S); 180~264VAC only (DRP-480)					
AC inrush current (230VAC)	56A	40A	40A	45A	40A	45A
DC adjustment range	±10%	12V: 12~14V, 24V: 24~28V, 48V: 48~53V				
Overload protection		105%~150% constant current limiting, auto-recovery				
Over voltage protection	Range	115%~142% rated output voltage		30~36V for 24V model, 54~60V for 48V model		
	Type	Shut off, AC recycle to re-start				
Over temp. protection		Shut down output voltage, recovers automatically after temperature goes down				
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC, 1 minute					
Working temperature	-10°C~+50°C	-10°C~+60°C		-10°C~+70°C	-20°C~+70°C	
Safety standards	UL508, TUV EN60950-1 approved (UL60950-1 also for DR-120, DRP-240, DRP-480, DRP-480S)					
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 heavy industry level					
Connection	I/P: 3 poles, O/P: 4 poles screw DIN terminal					
Dimension (WxHxD)(mm)	78x 93x 67	55.5x 125.2x 100	65.5x 125.2x 100	125.5x 125.2x 100	227x 125.2x 100	
Case No.	918A	923	921A	922A	930	
Packing	48pcs / 17.5kg	20pcs / 13.0kg	20pcs / 16.5kg	12pcs / 15.5kg	6pcs / 15.0kg	6pcs / 16.6kg

■ DR-45 Series



Model No.	Output	Tol.	R&N	Effi.
DR-4505	5V, 0~5.0A	±2%	100mV	72%
DR-4512	12V, 0~3.5A	±1%	200mV	77%
DR-4515	15V, 0~2.8A	±1%	240mV	77%
DR-4524	24V, 0~2.0A	±1%	480mV	80%

■ DRP-240 Series



Model No.	Output	Tol.	R&N	Effi.
DRP-240-24	24V, 0~10A	±1%	80mV	84%
DRP-240-48	48V, 0~5.0A	±1%	150mV	85%

■ DRP-480 Series



Model No.	Output	Tol.	R&N	Effi.
DRP-480-24	24V, 0~20A	±1%	120mV	89%
DRP-480-48	48V, 0~10A	±1%	120mV	89%

■ DRP-480S Series



Model No.	Output	Tol.	R&N	Effi.
DRP-480S-24	24V, 0~20A	±1%	120mV	89%
DRP-480S-48	48V, 0~10A	±1%	120mV	89%

■ DR-75 Series



Model No.	Output	Tol.	R&N	Effi.
DR-75-12	12V, 0~6.3A	±2%	100mV	76%
DR-75-24	24V, 0~3.2A	±1%	150mV	80%
DR-75-48	48V, 0~1.6A	±1%	240mV	81%

■ DR-120 Series



Model No.	Output	Tol.	R&N	Effi.
DR-120-12	12V, 0~10A	±2%	80mV	80%
DR-120-24	24V, 0~5.0A	±1%	80mV	84%
DR-120-48	48V, 0~2.5A	±1%	100mV	85%

Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.





■ Features

- Input 340~550VAC, 3-phase (two phase for DRH-120)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in constant current limiting circuit
- Cooling by free air convection
- Can be installed on DIN rail TS35 / 7.5 or 15
- UL508 (industrial control equipment) listed (240~960W)
- EN61000-6-2 industrial immunity level
- Optional parallel function (1+1) (960W only)
- 100% full load burn-in test
- LED indicator for power on
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	DRH-120	DRT-240	DRT-480	DRT-960					
AC input voltage range	340~550VAC, two phase	340~550VAC, 3-phase (two phase operation possible)							
AC inrush current (max.)	Cold start, 50A at 400VAC								
DC adjustment range	24V: 24~28V, 48V: 48~55V								
Overload protection	Range	105%~160%	105%~150%	105%~125%					
	Type	Constant current limiting, auto-recovery		Constant current limiting, delay shut off after 3 sec.					
Over voltage protection	Range	24V: 30~36V, 48V: 59~66V							
	Type	Shut off, AC recycle to re-start							
Over temperature protection	Shut down output voltage, recovers automatically after temperature goes down								
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute								
Working temperature	-20~+60°C	-20~+70°C	-20~+60°C						
Safety standards	UL60950-1 approved		UL508, UL60950-1, TUV EN60950-1 approved						
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61204-3, EN61000-6-2 heavy industry level								
Connection (screw DIN terminal)	I/P: 3 poles, O/P: 4 poles	I/P: 4 poles, O/P: 4 poles	I/P: 4 poles, O/P: 6 poles						
Dimension (WxHxD)(mm)	65.5x 125.2x 100	125.5x 125.2x 100	227x 125.2x 100	276x 125.2x 100					
Case No.	921A	922A	930A	934					
Packing	20pcs / 16.0kg	12pcs / 16.6kg	6pcs / 16.0kg	4pcs / 14.2kg					

■ DRH-120 (Two Phase)



Model No.	Output	Tol.	R&N	Effi.
DRH-120-24	24V, 0~5.0A	±1%	80mV	85%
DRH-120-48	48V, 0~2.5A	±1%	80mV	86%

■ DRT-240 (Three Phase)



Model No.	Output	Tol.	R&N	Effi.
DRT-240-24	24V, 0~10A	±1%	80mV	89%
DRT-240-48	48V, 0~5.0A	±1%	80mV	89%

■ DRT-480 (Three Phase)



Model No.	Output	Tol.	R&N	Effi.
DRT-480-24	24V, 0~20A	±1%	80mV	89%
DRT-480-48	48V, 0~10A	±1%	80mV	90%

■ DRT-960 (Three Phase)



Model No.	Output	Tol.	R&N	Effi.
DRT-960-24	24V, 0~40A	±1%	80mV	91%
DRT-960-48	48V, 0~20A	±1%	80mV	92%

GSM18/25/36 Series 18W/25W/36W Green Medical Adaptor

Under Development



- Universal AC input / Full range
- No load power consumption <0.1W
- Meet ErP step 2
- Meet EISA 2007(Energy Independence and Security Act)
- Class II power (without earth pin)
- 2 pole USA / EURO AC plug (Wall-mounted style) or IEC320-C8 (Desktop style)
- Fully enclosed plastic case
- Protections: Short circuit / Overload / Over voltage
- LED indicator for power on
- Pass LPS
- Design refer to IEC/EN60601-1, ANSI/AAMI ES60601-1
- Output models: 5V / 7.5V / 9V / 12V / 15V / 18V / 24V / 48V
- 3 years warranty



■ Features

- High efficiency up to 94%
- Universal AC input/Full range (SDR-120/240/480) AC input 180~264VAC only (SDR-960)
- Built-in active PFC function
- Protections: Short circuit/ Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL508(industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 150% peak load capability (SDR-120/240/480)
130% peak load capability (SDR-960)
- Current sharing up to 3840W (7+1) for SDR-480P
Current sharing up to 3840W (3+1) for SDR-960
- Comply with GL and SEMI F47(SDR-120/240/480)
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	SDR-120	SDR-240	SDR-480□	SDR-960 NEW
AC input voltage range	88~264VAC; 124~370VDC		90~264VAC; 127~370VDC	180~264VAC; 254~370VDC
AC inrush current (max.)	Cold start, 70A at 230VAC	Cold start, 65A at 230VAC	Cold start, 80A at 230VAC	Cold start, 50A at 230VAC
DC adjustment range	12V: 12~14V (only for SDR-120), 24V: 24~28V, 48V: 48~55V			
Overload protection	Normally works within 110%~150% rated output power for 3 seconds and then shut down output voltage with auto-recovery			Normally works within 105%~130% rated output power for 3 seconds and then shut down o/p voltage with auto-recovery after 30 seconds if the peak load condition is removed
	>150% rated power or short circuit, constant current limiting with auto-recovery within 2 seconds and may cause to shut down if over 2 seconds			Constant current limiting within 130%~150% rated output power for more than 3 seconds and then shut down o/p voltage, re-power on to recover
Over voltage protection	Range	14~17V for 12V model(SDR-120 only), 29~33V for 24V model, 56~65V for 48V model		
	Type	Shut down o/p voltage, re-power on to recover	Shut down o/p voltage with auto-recovery, or re-power on to recover	
Over temperature protection	Range	95°C±5°C	105°C±5°C	90°C±5°C
	Type	TSW : detect on heatsink of power switch		
Withstand voltage	I/P-O/P:3kVAC O/P-DC OK:0.5kVAC	I/P-FG:1.5kVAC O/P-FG:0.5kVAC		I/P-O/P:3kVAC O/P-FG:0.5kVAC O/P-DC OK:0.5kVAC
Working temperature	-25~+70°C (refer to output derating curve)			-30~+70°C (refer to output derating curve)
Safety standards	UL508, TUV EN60950-1, GL (SDR-120/240/480) approved (960W pending)			
EMC standards	EN55022 Class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 (EN50082-2), EN61204-3; SEMI F47/GL (SDR-120/240/480)			
Connection	I/P: 3 poles, O/P: 4 poles screw DIN terminal	I/P: 3 poles, O/P: 6 poles screw DIN terminal	I/P: 3 poles, O/P: 8 poles screw DIN terminal	I/P:3 poles, O/P: 6 poles screw DIN terminal
Dimension (WxHxD)(mm)	40x 125.2x 113.5	63x 125.2x 113.5	85.5x 125.2x 128.5	110x125.2x150mm

■ SDR-120 Series



Model No.	Output	Tol.	R&N	Effi.
SDR-120-12	12V, 0~10A	±1.0%	100mV	89%
SDR-120-24	24V, 0~5A	±1.0%	100mV	91%
SDR-120-48	48V, 0~2.5A	±1.0%	120mV	90.5%

■ SDR-480 Series



Model No.	Output	Tol.	R&N	Effi.
SDR-480□-24	24V, 0~20A	±1.2%	100mV	94%
SDR-480□-48	48V, 0~10A	±1.0%	120mV	94%

□=blank, P ; Blank: basic function, P: with parallel function

■ SDR-240 Series



Model No.	Output	Tol.	R&N	Effi.
SDR-240-24	24V, 0~10A	±1.0%	100mV	94%
SDR-240-48	48V, 0~5A	±1.0%	120mV	94%

■ SDR-960 Series



Model No.	Output	Tol.	R&N	Effi.
SDR-960-24	24V, 0~40A	±1.0%	180mV	94%
SDR-960-48	48V, 0~20A	±1.0%	250mV	94%



■ Features

- Single and two phase wide input range 180~550VAC
- Built-in active PFC (WDR-240/480)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35/7.5 or 15
- UL508(industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	WDR-120		WDR-240		WDR-480		
AC input voltage range	180~550VAC(single and two phase); 254~780VDC						
AC input current	0.55A / 400VAC, 1.2A / 230VAC		1A / 400VAC, 2A / 230VAC		1.6A / 400VAC, 4A / 230VAC		
AC inrush current (max.)	Cold start, 50A at 400VAC						
DC adjustment range	12V: 12~15V, 24V: 24~29V, 48V: 48~58V		24V: 24~28V, 48V: 48~55V				
Overload protection	105%~130% rated output power, constant current limiting, auto-recovery		105%~130% rated output power, constant current limiting, unit will shut down after 3 sec.; auto-recovery after 1 minute if the fault condition is removed.				
Over voltage protection	Range	16~18V for 12V model (only for WDR-120), 29~33V for 24V model, 56~65V for 48V model					
	Type	Shut down o/p voltage, auto-recovery		Shut down o/p voltage, auto-recovery after 1 minute if the fault condition is removed			
Setup, rise, hold up time		2000ms, 70ms, 10ms at full load and 230VAC; 2000ms, 70ms, 50ms at full load and 400VAC		1500ms, 150ms, 18ms at full load and 230VAC; 800ms, 150ms, 18ms at full load and 400VAC		2000ms, 150ms, 16ms at full load and 230VAC; 800ms, 150ms, 18ms at full load and 400VAC	
Over temperature protection	Range	100°C±5°C		90°C~±5°C		95°C±5°C	
	Type	TSW1 : detect on heatsink of power switch					
Withstand voltage		I/P-O/P:3kVAC I/P-FG:1.5kVAC O/P-FG:0.5kVAC O/P-DC OK: 0.5kVAC					
Isolation resistance		100MΩ(min.)@500VDC					
Working temperature		-25~+70°C (refer to output derating curve)		-30~+70°C (refer to output derating curve)			
DC OK signal		Relay Contact					
Leakage current		<3.5mA at 530VAC					
Vibration		10~500Hz, 2G, 10 minutes / 1 cycle, period of 60 minutes each along X, Y, Z axes					
Safety standards		UL508 approved ; IEC60950-1 CB approved by SIQ ; Design refer to GL					
EMC standards		EN55022 Class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level					
Connection		I/P: 3 poles, O/P: 4 poles screw DIN terminal		I/P: 3 poles, O/P: 6 poles screw DIN terminal			
Dimension (WxHxD)(mm)		40x 125.2x 113.5		63x 125.2x 113.5		85.5x 125.2x 128.5	
Packing		20pcs / 14kg		12pcs / 13.7kg		8pcs / 14.6kg	

■ WDR-120 Series

Model No.	Output	Tol.	R&N	Effi.
WDR-120-12	12V, 0~10A	±1.5%	120mV	89.5%
WDR-120-24	24V, 0~5A	±1.0%	120mV	91%
WDR-120-48	48V, 0~2.5A	±1.0%	150mV	92%

■ WDR-480 Series

Model No.	Output	Tol.	R&N	Effi.
WDR-480-24	24V, 0~20A	±1.0%	100mV	92%
WDR-480-48	48V, 0~10A	±1.0%	150mV	93%

■ WDR-240 Series

Model No.	Output	Tol.	R&N	Effi.
WDR-240-24	24V, 0~10A	±1.0%	150mV	91%
WDR-240-48	48V, 0~5A	±1.0%	150mV	91%

Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service

960W High Input Voltage



NEW

CASE: 214A 110x 125.2x 150 mm

- Input 340~550VAC, 3-phase
- Width only 110mm
- Built-in active PFC function
- High efficiency up to 94.5%
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Installed on DIN rail TS-35 / 7.5 or 15
- EN61000-6-2(EN50082-2) industrial immunity level
- Current sharing up to 3840W (3+1)
- Built-in DC OK relay contact
- 3 years warranty

AC input voltage range 340~550VAC, 3-phase (two phase operation possible)

AC input current (Typ.)..... 2A / 400VAC, 1.4A / 500VAC

AC inrush current Cold start, 60A at 400VAC

DC adjustment range 24V: 24~28V, 48V: 48~55V

Overload protection 105%~130% rated output power, constant current limiting, unit will shut down after 3 sec. re-power on to recover

Over voltage protection 29~33V (24V model), 56~65V (48V model), shut down o/p voltage, re-power on to recover

Over temperature..... 90°C±5°C (24V model), 85°C±5°C (48V model) shut down o/p voltage, recovers automatically after temperature goes down

Withstand voltage..... I/P-O/P:3kVAC I/P-FG:2kVAC O/P-FG:0.5kVAC
O/P-DC OK: 0.5kVAC

Working temperature -30~+70°C (refer to output derating curve)

Safety standards..... UL508 approved; IEC60950-1 CB approved by SIQ

EMC standards EN55022 Class B, EN61000-3-2,3,

EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 (EN50082-2),
EN61204-3, heavy industry level

Connection I/P: 3 poles, O/P: 6 poles screw DIN terminal

Model No.	Output	Tol.	R&N	Effi.
TDR-960-24	24V, 0~40A	±1.0%	180mV	94.0%
TDR-960-48	48V, 0~20A	±1.0%	250mV	94.5%

20A Power Supply Redundant Module

CE



CASE: 923C 55.5x 125.2x 100 mm

- Suitable for redundant operation of 24V system
- Installed on DIN rail TS35 / 7.5 or 15
- Relay contact signal output and LED indicator for input failure alarm
- Cooling by free air convection
- 3 years warranty

DC input voltage range 21~28V, 20A max. x 2 channels

Reverse voltage 30V

DC output current 20A max.

DC output voltage drop 0.5V max.

Input voltage alarm When input is > 20V(±5%) or <30V(±5%), relay contacts

Relay contact rating 30VDC, 1A

Working temperature -20~+70°C

EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11

Connection I/P: 4 poles, O/P: 2 poles screw DIN terminal,
Single output: 4 poles

Model No.	Output	Reverse Voltage	Current
DR-RDN20	24V, 20A	30V max.	20A max.

► Feature Description

DR-RDN-20 is a 20A redundancy (decoupling) module for the 24VDC power system. Containing 2 sets of 20A Or-ing diodes with wonderful heat dissipation deployment, DR-RDN20 offers a safe option of 1+1 redundant set-up. Not only perfectly decouple power sources from each other as well as from the load, DR-RDN-20 also provides users monitoring signals for both input channels through the built-in relays.

DR-UPS40 is a 40A max. DC UPS (battery control) module for the 24VDC power system. Accompany with external batteries, it can back-up up to 40A of current to critical loads for certain period of time depending on the capacity of batteries. With complete monitoring signals / LED indicators for DC BUS OK, Battery Fail, Battery Discharge, and the repeated Battery Test function to check the situation of external batteries, users can customize their own DC UPS system to back up critical loads and capture the status of the whole system easily.

40A DC UPS Module

CE



CASE: 923D 55.5x 125.2x 100 mm

- Battery controller for DIN rail UPS system
- Parallel connected to DC BUS
- Suitable for 24V system up to 40A
- Installed on DIN Rail TS35 / 7.5 or 15
- Built-in battery test function
- Battery polarity protection
- Relay contact signal output and LED indicator for DC BUS OK, Battery Fail, and Battery Discharge
- Cooling by free air convection
- 3 years warranty

DC input / DC bus 24~29V, 40A max.

Battery input voltage 21~29V

Battery input Current 0~40A

Charge current (typ.) 2A

External battery (typ.) 24V, 4AH / 7AH / 12AH

DC bus ok Relay status : Short when DC voltage between 21~29V(±3%), relay contacts

LED(Green) : DC bus OK : light;
DC bus fail : dark

Battery fail Relay status : Short when battery failure is observed through the battery test function, relay contacts

LED(Red) : Battery over-discharge warning or battery broken: light;
Battery OK: dark

Battery discharge Relay status : Short when battery in discharge condition, relay contacts

LED(Yellow) : Battery discharging: light;
Battery is not discharging or discharging current <2A: dark


Working temperature -20~+70°C

EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11

Connection I/P: 2 poles, O/P: 2 poles screw DIN terminal, Single output: 6 poles


Model No.	DC BUS Voltage	DC BUS Current
DR-UPS40	24~29V	40A max.

Block Diagram

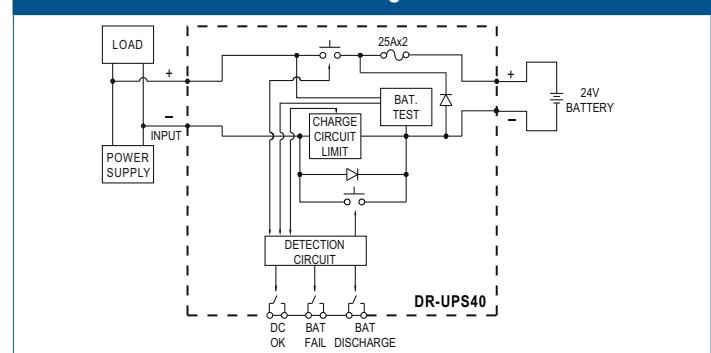

Example of Application

Back up connection for AC interruption

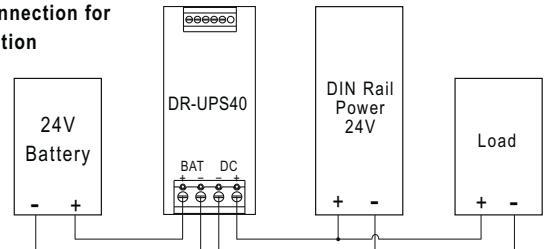

Open Frame

5~20W AC/DC Encapsulated Type




Features

- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Protections: Short circuit / Overload / Over voltage
- Low leakage current < 300µA (20W)
- No load power consumption <0.5W (<0.75W for 20W models)
- Fully isolated plastic case
- Isolation class II (5~15W)
- Cooling by free air convection
- Meet industrial, IT safety requirements
- 100% full load burn-in test
- 3 years warranty




PM-05 / 10 / 15 Series

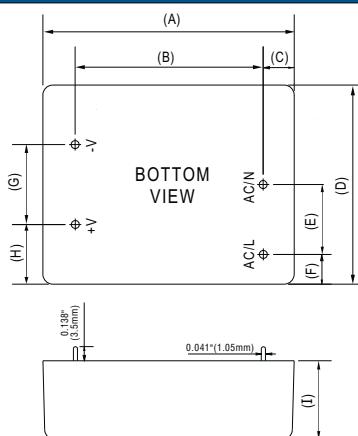

	5W	10W	15W
A	2.475" (62.85mm)	2.76" (70mm)	2.95" (75mm)
B	1.85" (47mm)	2.13" (54mm)	2.441" (62mm)
C	0.306" (7.8mm)	0.315" (8mm)	0.256" (6.5mm)
D	1.97" (50mm)	1.97" (50mm)	2.09" (53mm)
E	0.689" (17.5mm)	0.689" (17.5mm)	0.788" (20mm)
F	0.295" (7.5mm)	0.295" (7.5mm)	0.256" (6.5mm)
G	0.789" (20.04mm)	0.789" (20.04mm)	0.906" (23.01mm)
H	0.59" (15mm)	0.59" (15mm)	0.59" (15mm)
I	0.776" (19.7mm)	0.89" (22.7mm)	0.89" (22.7mm)

PM-20 Series

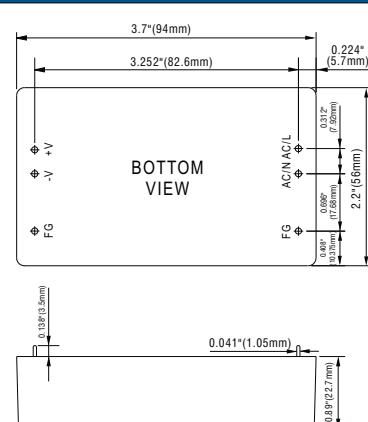

General Specification

AC input voltage range85~264VAC; 120~370VDC

Frequency range47~440Hz

AC inrush current (max.) ... Cold start, 25A at 115VAC, 45A at 230VAC
(PM-15: 30A at 115VAC, 50A at 230VAC)
(PM-20: 30A at 115VAC, 65A at 230VAC)

Overload protection>105% hiccup mode, auto recovery

Over voltage protection115%~135% rated output voltage, shut off,
AC recycle to re-start

Setup, rise, hold up time ... PM-5/15: 1000ms, 20ms, 100ms @ 230VAC
PM-10: 1800ms, 20ms, 100ms @ 230VAC
PM-20: 500ms, 20ms, 50ms @ 230VAC

Withstand voltageI/P-O/P: 4kVAC, 1 minute

Working temperature-20~+70°C (refer to output derating curve)

Safety standardsANSI/AAMI ES60601-1, TUV EN60601-1,
UL60950-1 (PM-15) approved

EMC standardsEN55011, EN55022 Class B, EN61000-3-2,3
EN61000-4-2,3,4,5,6,8,11, EN55024,
EN60601-1-2, EN61204-3 Medical level, criteria A

Connection4 industrial pins (20W: 6 industrial pins)

Packing0.085kg ; 120pcs / 11.2kg / 0.97CUFT(PM-05)
0.105kg ; 120pcs / 13.6kg / 0.97CUFT(PM-10)
0.14kg ; 120pcs / 17.8kg / 0.97CUFT(PM-15)
0.18kg ; 90pcs / 17.2kg / 0.97CUFT(PM-20)

PM-05 Series

Model No.	Output	Tol.	R&N	Effi.
PM-05-3.3	3.3V, 0~1.25A	±3%	80mV	67%
PM-05-5	5V, 0~1.00A	±2%	80mV	71%
PM-05-12	12V, 0~0.42A	±2%	150mV	73%
PM-05-15	15V, 0~0.33A	±2%	150mV	74%
PM-05-24	24V, 0~0.23A	±2%	240mV	76%

PM-10 Series

Model No.	Output	Tol.	R&N	Effi.
PM-10-3.3	3.3V, 0~2.50A	±3%	150mV	66%
PM-10-5	5V, 0~2.00A	±2%	150mV	74%
PM-10-12	12V, 0~0.85A	±2%	150mV	78%
PM-10-15	15V, 0~0.67A	±2%	150mV	79%
PM-10-24	24V, 0~0.42A	±2%	240mV	79%

PM-15 Series

Model No.	Output	Tol.	R&N	Effi.
PM-15-3.3	3.3V, 0~3.50A	±3%	80mV	73%
PM-15-5	5V, 0~3.00A	±2%	80mV	76%
PM-15-12	12V, 0~1.25A	±2%	150mV	78%
PM-15-15	15V, 0~1.00A	±2%	150mV	79%
PM-15-24	24V, 0~0.63A	±2%	240mV	81%

PM-20 Series

Model No.	Output	Tol.	R&N	Effi.
PM-20-3.3	3.3V, 0~4.50A	±3%	80mV	71%
PM-20-5	5V, 0~4.40A	±2%	80mV	75%
PM-20-12	12V, 0~1.80A	±2%	150mV	81%
PM-20-15	15V, 0~1.40A	±2%	150mV	83%
PM-20-24	24V, 0~0.92A	±2%	240mV	84%

Open Frame

5~20W AC/DC On Board Type




■ Features

- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Protections:
 - Short circuit / Overload / Over voltage / Over temp.
- Low leakage current < 300µA (20W)
- No load power consumption <0.5W (<0.75W for 20W models)
- Isolation class II (5~15W)
- On-board type version available for 20W (optional)
- Cooling by free air convection
- Meet industrial, IT safety requirements
- 100% full load burn-in test
- 3 years warranty




NFM-05 / 10 / 15 Series

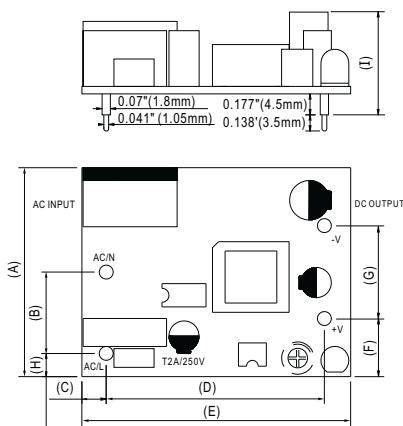

	5W	10W	15W
A	1.77" (45mm)	1.77" (45mm)	1.89" (48mm)
B	0.689" (17.5mm)	0.689" (17.5mm)	0.788" (20mm)
C	0.21" (5.33mm)	0.22" (5.5mm)	0.157" (4mm)
D	1.85" (47mm)	2.13" (54mm)	2.441" (62mm)
E	2.28" (57.9mm)	2.56" (65mm)	2.75" (69.85mm)
F	0.491" (12.47mm)	0.491" (12.47mm)	0.492" (12.5mm)
G	0.789" (20.04mm)	0.789" (20.04mm)	0.906" (23.01mm)
H	0.196" (5mm)	0.196" (5mm)	0.157" (4mm)
I	0.75" (19.1mm)	0.87" (22mm)	0.87" (22mm)

NFM-20 Series

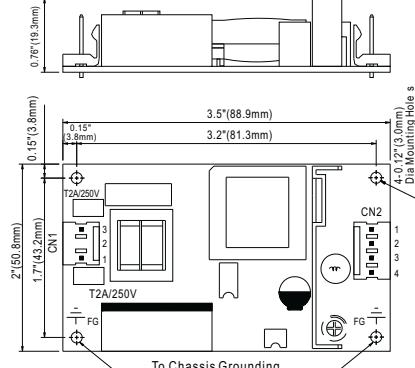

■ General Specification

- AC input voltage range 85~264VAC; 120~370VDC
 Frequency range 47~440Hz
 AC inrush current (max.) Cold start, 25A at 115VAC, 45A at 230VAC
 (NFM-15: 30A at 115VAC, 50A at 230VAC)
 (NFM-20: 30A at 115VAC, 65A at 230VAC)
 DC adjustment range ±10% rated output voltage
 Overload protection >105% hiccup mode, auto recovery
 Over voltage protection 115%~135% rated output voltage, shut off,
 AC recycle to re-start
 Over temp. protection U1,Tj: 140~160°C, power shutdown, recovers
 automatically after temperature goes down
 Setup, rise, hold up time NFM-5/15: 1000ms, 20ms, 100ms @ 230VAC
 NFM-10: 1800ms, 20ms, 100ms @ 230VAC
 NFM-20: 500ms, 20ms, 50ms @ 230VAC
 Withstand voltage I/P-O/P: 4kVAC, 1 minute
 Working temperature -20~+70°C (refer to output derating curve)
 Safety standards ANSI/AAMI ES60601-1, TUV EN60601-1,
 UL60950-1 (NFM-15) approved
 EMC standards EN55011, EN55022 Class B, EN61000-3-2,3
 EN61000-4-2,3,4,5,6,8,11, EN55024,
 EN60610-1-2, EN61204-3 Medical level,
 criteria A
 Connection 4 industrial pins for 5~15W
 3P / 4P / 3.96mm pitch, Molex 41791-03/04
 for 20W
 Packing 0.03kg ; 120pcs / 4.6kg / 0.97CUFT(NFM-05)
 0.045kg ; 120pcs / 6.4kg / 0.97CUFT(NFM-10)
 0.065kg ; 120pcs / 8.8kg / 0.97CUFT(NFM-15)
 0.09kg ; 105pcs / 10.5kg / 0.97CUFT(NFM-20)



Energy Saving —

We care about energy saving. This logo represents
 that this model has "low no load power consumption"!

NFM-05 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-05-3.3	3.3V, 0~1.25A	±2%	80mV	67%
NFM-05-5	5V, 0~1.00A	±2%	80mV	71%
NFM-05-12	12V, 0~0.42A	±1%	150mV	73%
NFM-05-15	15V, 0~0.33A	±1%	150mV	74%
NFM-05-24	24V, 0~0.23A	±1%	240mV	76%

NFM-10 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-10-3.3	3.3V, 0~2.50A	±2%	150mV	66%
NFM-10-5	5V, 0~2.00A	±2%	150mV	74%
NFM-10-12	12V, 0~0.85A	±1%	150mV	78%
NFM-10-15	15V, 0~0.67A	±1%	150mV	79%
NFM-10-24	24V, 0~0.42A	±1%	240mV	79%

NFM-15 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-15-3.3	3.3V, 0~3.50A	±2%	80mV	73%
NFM-15-5	5V, 0~3.00A	±2%	80mV	76%
NFM-15-12	12V, 0~1.25A	±1%	150mV	78%
NFM-15-15	15V, 0~1.00A	±1%	150mV	79%
NFM-15-24	24V, 0~0.63A	±1%	240mV	81%

NFM-20 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-20-3.3	3.3V, 0~4.50A	±2%	80mV	71%
NFM-20-5	5V, 0~4.40A	±2%	80mV	75%
NFM-20-12	12V, 0~1.80A	±1%	150mV	81%
NFM-20-15	15V, 0~1.40A	±1%	150mV	83%
NFM-20-24	24V, 0~0.92A	±1%	240mV	84%

Open Frame

30~45W 1~3 Output Medical Type




30W Single Output Medical Type

- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Low leakage current $\leq 200\mu\text{A}$
- Compact size, low profile
- 100% full load burn-in test
- Over voltage / Over temp.
- 3 years warranty



101.6x 65.8x 23.5 mm



AC input voltage range 88~264VAC; 120~370VDC

Overload protection >105% hiccup mode, auto-recovery

Over voltage protection ... 110%~135% rated output voltage

Leakage current Less than 200 μA at 264VAC

Withstand voltage I/P-O/P: 4kVAC, I/P-FG: 1.5kVAC, 1minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards ANSI/AAMI ES60601-1, TUV EN60601-1, IEC60601-1 approved

EMC standards EN55011 class B, EN60601-1-2, EN61000-3-2, EN61000-4-2,3,4,5,6,8,11

Connection 5+4P/ 3.96mm pitch, Molex P/N: 41791-05,04

Packing 0.16kg ; 90pcs / 15.8kg / 1.02CUFT



Model No.	Output	Tol.	R&N	Effi.
MPS-30-5	5V, 0~5.0A	$\pm 3\%$	80mV	72%
MPS-30-12	12V, 0~2.5A	$\pm 3\%$	120mV	75%
MPS-30-15	15V, 0~2.0A	$\pm 3\%$	150mV	76%
MPS-30-24	24V, 0~1.2A	$\pm 3\%$	240mV	77%
MPS-30-27	27V, 0~1.1A	$\pm 3\%$	240mV	78%
MPS-30-48	48V, 0~0.6A	$\pm 2\%$	240mV	78%

MSP-600 Series **Under Development**

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- High efficiency up to 89%
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Leakage current $\leq 300\mu\text{A}$
- Built-in constant current limiting circuit
- Built-in remote sense function
- Built-in remote ON/OFF control & 5V/0.3A standby output
- No load power consumption $< 0.5\text{W}$
- Forced air cooling by built-in DC fan
- Design refer to IEC/EN60601-1, ANSI/AAMI ES60601-1(MOOP level)
- Output models: 3.3V / 5V / 7.5V / 12V / 15V / 24V / 36V / 48V
- 5 years warranty

45W 1~3 Output Medical Type

- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Protections: Short circuit / Overload / Over voltage
- Low leakage current $\leq 250\mu\text{A}$
- Approvals: UL / CUL / TUV / CB / CE
- Fixed switching frequency at 45kHz
- 100% full load burn-in test
- 3 years warranty

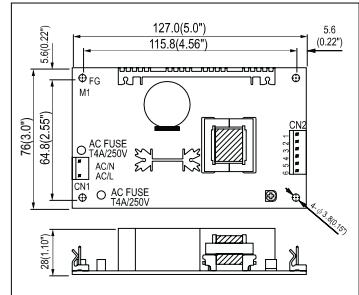

AC input voltage range 90~264VAC; 120~370VDC

AC inrush current Cold start, 17A at 115VAC, 35A at 230VAC

DC adjustment range CH1: $\pm 10\%$ rated output voltage

Overload protection 53~75W hiccup mode, auto-recovery

Over voltage protectionCH1: 115%~135% rated output voltage

Leakage current Less than 250 μA at 264VAC

Setup, rise, hold up time ..800ms, 30ms, 50ms at full load and 230VAC

Withstand voltage I/P - O/P: 4kVAC, I/P - FG: 1.5kVAC, 1 minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards ANSI/AAMI ES60601-1, TUV EN60601-1, IEC60601-1 approved

EMC standards EN55011 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2

Connection 2P,6P/ 3.96mm pitch, Molex P/N: 5277-02, 5273-06

Packing 0.18kg ; 72pcs / 15.1kg / 1.35CUFT (MPS-45)
0.20kg ; 72pcs / 17.4kg / 1.35CUFT (MPD-45)
0.21kg ; 72pcs / 18.0kg / 1.35CUFT (MPT-45)

Single Output

Model No.	Output	Tol.	R&N	Effi.
MPS-45-3.3	3.3V, 0~8.0A	$\pm 3\%$	80mV	65%
MPS-45-5	5V, 0~8.0A	$\pm 3\%$	100mV	72%
MPS-45-7.5	7.5V, 0~5.4A	$\pm 3\%$	100mV	75%
MPS-45-12	12V, 0~3.7A	$\pm 2\%$	100mV	76%
MPS-45-13.5	13.5V, 0~3.3A	$\pm 2\%$	100mV	76%
MPS-45-15	15V, 0~3.0A	$\pm 2\%$	100mV	77%
MPS-45-24	24V, 0~1.9A	$\pm 2\%$	100mV	78%
MPS-45-27	27V, 0~1.7A	$\pm 2\%$	100mV	78%
MPS-45-48	48V, 0~1.0A	$\pm 2\%$	100mV	78%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPD-45A	5V, 0.4~5.0A	$\pm 4\%$	60mV	76%	40W
	12V, 0.2~2.5A	$\pm 7\%$	120mV		
MPD-45B	5V, 0.4~5.0A	$\pm 4\%$	60mV	78%	45W
	24V, 0.2~1.8A	$\pm 7\%$	150mV		

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPT-45A	5V, 0.4~5.0A	$\pm 4\%$	60mV	73%	41W
	12V, 0.2~2.5A	$\pm 7\%$	120mV		
MPT-45B	-5V, 0.0~0.5A	$\pm 5\%$	60mV		
	5V, 0.4~5.0A	$\pm 4\%$	60mV	75%	43W
MPT-45C	12V, 0.2~2.5A	$\pm 7\%$	120mV		
	-12V, 0.0~0.5A	$\pm 5\%$	100mV		
MPT-45C	5V, 0.4~5.0A	$\pm 4\%$	60mV	75%	44W
	15V, 0.2~2.3A	$\pm 7\%$	120mV		
	-15V, 0.0~0.5A	$\pm 5\%$	100mV		

Open Frame

60~65W 1~3 Output Medical Type




60W 1~3 Output Medical Type

- 4"x2" compact size
- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Protections: Short circuit / Overload / Over voltage
- No load power consumption <0.75W (single output models only)
- Low leakage current <100µA
- 110% peak load capability
- High power density 6.57W/in³
- Cooling by free air convection
- 3 years warranty
- Suitable for medical & IT applications



101.6x 50.8x 29 mm

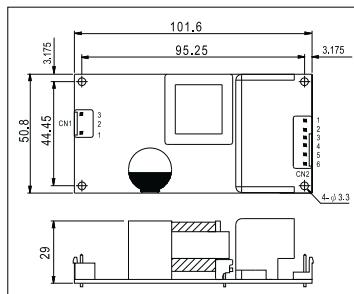

AC input voltage range90~264VAC; 127~370VDC

AC inrush currentCold start, 30A at 115VAC, 60A at 230VAC

DC adjustment range-5%~+10% rated output voltage (single output only)

Overload protection115%~150% hiccup mode, auto-recovery

Over voltage protectionCH1: 110%~135% rated output voltage

Leakage currentLess than 100µA at 264VAC

Setup, rise, hold up time .. 500ms, 30ms, 50ms at full load and 230VAC (RPS-60)
200ms, 15ms, 70ms at full load and 230VAC (RPD/T-60)

Withstand voltageI/P - O/P: 4kVAC, I/P - FG: 2kVAC, 1 minute

Working temperature-20°C~+70°C (RPS-60, refer to output derating curve)
-20°C~+65°C (RPD/T-60, refer to output derating curve)

Safety standardsANSI/AAMI ES60601-1, UL60950-1,
TUV EN60601-1, EN60950-1 approved

EMC standardsEN55011 / EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,8,11, EN60601-1-2,
EN61204-3 medical level

Connection3.4P / 3.96mm pitch, JST P/N: B3P / B4P-VH (RPS-60)
3.6P / 3.96mm pitch, JST P/N: B3P / B6P-VH (RPD/T-60)

Packing0.15kg ; 96pcs / 15.4kg / 0.89CUFT

Single Output

Model No.	Output	Tol.	R&N	Effi.
RPS-60-3.3	3.3V, 0~11A	±2%	80mV	74%
RPS-60-5	5V, 0~11A	±2%	80mV	79%
RPS-60-12	12V, 0~5.5A	±2%	120mV	83%
RPS-60-15	15V, 0~4.4A	±2%	150mV	84%
RPS-60-24	24V, 0~2.75A	±1%	240mV	85%
RPS-60-48	48V, 0~1.375A	±1%	300mV	86%

Dual Output


Model No.	Output	Tol.	R&N	Effi.	Max.
RPD-60A	5V, 0.5~5.5A	+3%, -2%	80mV	78%	54W
	12V, 0.1~2.2A	±%			
RPD-60B	5V, 0.5~3.85A	+3%, -2%	80mV	82%	59W
	24V, 0.1~1.65A	+8%, -4%			

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-60A	5V, 0.5~4.4A	+3%, -2%	80mV	77%	51W
	12V, 0.1~2.2A	±6%			
	-5V, 0.1~0.55A	+9%, -8%			
RPT-60B	5V, 0.5~4.4A	+3%, -2%	80mV	78%	55W
	12V, 0.1~2.2A	±6%			
	-12V, 0.1~0.55A	+10%, -6%			
RPT-60C	5V, 0.5~4.4A	+3%, -2%	80mV	79%	55W
	15V, 0.1~0.65A	±6%			
	-15V, 0.1~0.55A	±8%			
RPT-60D	5V, 0.5~3.85A	+3%, -2%	80mV	79%	52W
	24V, 0.1~1.1A	±6%			
	12V, 0.1~0.55A	±8%			
RPT-6003	3.3V, 0.5~5.5A	+3%, -2%	80mV	75%	44W
	5V, 0.3~3.3A	±8%			
	12V, 0.1~0.77A	+10%, -6%			

65W 1~3 Output Medical Type

- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Protections: Short circuit / Overload / Over voltage
- Low leakage current≤250µA
- Fixed switching frequency at 45kHz
- 100% full load burn-in test
- 3 years warranty



AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 17A at 115VAC, 35A at 230VAC

DC adjustment range CH1: ±10% rated output voltage

Overload protection 73%~105% hiccup mode, auto-recovery

Over voltage protectionCH1: 115%~135% rated output voltage

Leakage current Less than 250µA at 264VAC

Setup, rise, hold up time .. 800ms, 30ms, 50ms at full load and 230VAC

Withstand voltage I/P-O/P: 4kVAC, I/P-FG: 2kVAC, 1 minute

Working temperature -10°C~ +60°C (refer to output derating curve)

Safety standards ANSI/AAMI ES60601-1, TUV EN60601-1 approved

EMC standards EN55011 class B, EN61000-4-2,3,4,5,6,8,11,
EN61000-3-2,3, EN60601-1-2

Connection 2P, 6P / 3.96mm pitch, Molex: 5277-02, 5273-06

Packing 0.23kg ; 54pcs / 14.6kg / 1.35CUFT (MPS-65)

0.25kg ; 54pcs / 16.0kg / 1.35CUFT (MPD-65)

0.27kg ; 54pcs / 16.8kg / 1.35CUFT (MPT-65)

Single Output

Model No.	Output	Tol.	R&N	Effi.
MPS-65-3.3	3.3V, 0~12A	±3%	80mV	66%
MPS-65-5	5V, 0~12A	±3%	100mV	74%
MPS-65-7.5	7.5V, 0~8.0A	±3%	100mV	76%
MPS-65-12	12V, 0~5.2A	±2%	100mV	77%
MPS-65-13.5	13.5V, 0~4.7A	±2%	100mV	78%
MPS-65-15	15V, 0~4.2A	±2%	100mV	79%
MPS-65-24	24V, 0~2.7A	±2%	100mV	80%
MPS-65-27	27V, 0~2.4A	±2%	100mV	80%
MPS-65-48	48V, 0~1.35A	±2%	100mV	80%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPD-65A	5V, 0.4~7.0A	±4%	60mV	75%	61W
	12V, 0.2~3.2A	±7%			
MPD-65B	5V, 0.4~6.0A	±4%	60mV	78%	66W
	24V, 0.2~2.6A	±7%			

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPT-65A	5V, 0.4~7.0A	±4%	60mV	74%	60W
	12V, 0.2~3.2A	+10%, -7%			
	-5V, 0.0~0.7A	±5%			
MPT-65B	5V, 0.4~7.0A	±4%	60mV	74%	64W
	12V, 0.2~3.2A	+10%, -7%			
	-12V, 0.0~0.7A	±5%			
MPT-65C	5V, 0.4~7.0A	±4%	60mV	74%	65W
	15V, 0.2~2.6A	+10%, -7%			
	-15V, 0.0~0.7A	±5%			


Open Frame

75~160W 1~3 Output Medical Type



75W 1~3 Output Medical Type

- Universal AC input / Full range
 - Medical safety approved (MOPP level)
 - Protections: Short circuit / Overload / Over voltage
 - No load power consumption <0.75W (single output models only)
 - Low leakage current <100µA
 - Fixed switching frequency at 65kHz
 - Free air convection for 75W and 100W with 23.5CFM forced air
 - 3 years warranty
 - Suitable for medical & IT applications

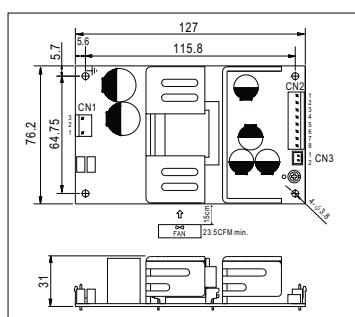

AC input voltage range	90~264VAC; 127~370VDC
AC inrush current	Cold start, 25A at 115VAC, 50A at 230VAC
DC adjustment range	CH1: -5%~+10% rated output voltage
Overload protection	140%~180% hiccup mode, auto-recovery
Over voltage protection	CH1: 115%~135% rated output voltage
Leakage current	Less than 100µA at 264VAC
Setup, rise, hold up time	500ms, 30ms, 80ms at full load and 230VAC
Withstand voltage	I/P-O/P: 4kVAC, I/P-FG: 2kVAC, 1 minute
Working temperature	-20~+70°C (refer to output derating curve)
Safety standards	ANSI/AAMI ES60601-1, TUV EN60601-1 approved
EMC standards	EN55011 / EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2, EN60601-1-2, EN61204-3 medical level
Connection	3+8P / 3.96mm pitch, JST P/N: B3P / B8P-VH
Packing	0.26kg ; 63pcs / 16.3kg / 1.35CUFT(RPS-75) 0.25kg ; 63pcs / 16.7kg / 1.35CUFT(RPD-75) 0.26kg ; 63pcs / 17.4kg / 1.35CUFT(RPT-75)

❖ Single Output

Model No.	Output	Tol.	R&N	Effi.
RPS-75-3.3	3.3V, 0~20A	±2%	80mV	73%
RPS-75-5	5V, 0~18.7A	±2%	80mV	78%
RPS-75-12	12V, 0~8.3A	±1%	120mV	82%
RPS-75-15	15V, 0~6.7A	±1%	150mV	83%
RPS-75-24	24V, 0~4.2A	±1%	240mV	85%
RPS-75-36	36V, 0~2.8A	±1%	300mV	86%
RPS-75-48	48V, 0~2.1A	±1%	300mV	86%

❖ Dual Output


Dual Output		Model No.	Output	Tol.	R&N	Effi.	Max.
RPD-75A	5V, 1.0~9.5A		12V, 0.3~4.0A	$\pm 2\%$	80mV	77%	96W
	24V, 0.2~2.7A				120mV		
RPD-75B	5V, 1.0~6.8A		24V, 0.2~2.7A	$\pm 2\%$	80mV	79%	99W
	24V, 0.2~2.7A				200mV		

❖ Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-75A	5V, 0.6~8.0A	±2%	80mV	76%	93W
	12V, 0.2~4.0A	±6%	120mV		
	-5V, 0.1~1.0A	±5%	120mV		
RPT-75B	5V, 0.6~8.0A	±2%	80mV	77%	100W
	12V, 0.2~4.0A	±6%	120mV		
	-12V, 0.1~1.0A	±5%	120mV		
RPT-75C	5V, 0.6~8.0A	±2%	80mV	77%	100W
	15V, 0.1~3.0A	±8%	150mV		
	-15V, 0.1~1.0A	±5%	150mV		
RPT-75D	5V, 0.6~7.0A	±2%	80mV	79%	95W
	24V, 0.1~2.0A	±8%	200mV		
	12V, 0.1~1.0A	±8%	120mV		
RPT-7503	3.3V, 0.7~7.0A	±4%	80mV	74%	81W
	5V, 0.0~8.0A	±6%	120mV		
	12V, 0.0~1.5A	+10%, -6%	120mV		

160W 1~3 Output Medical Type with PFC

- Universal AC input / Full range
 - Medical safety approved (MOPP level)
 - Built-in active PFC function
 - Protections: Short circuit / Overload / Over voltage / Over temperature
 - Low leakage current <200µA
 - Free air convection for 110W and 160W with 20.5 CFM forced air (RPS-160); Free air convection for 100W and 150W with 20.5 CFM forced air (RPD / I-160)
 - 5"x3" compact size
 - With power good and fail signal output
 - Built-in remote sense function for 5~15V (RPS-160)
 - Standby 5V@0.8A (G model)
 - No load power consumption under 0.75W by PS-ON control (G model)
 - 3 years warranty
 - Suitable for medical & IT applications

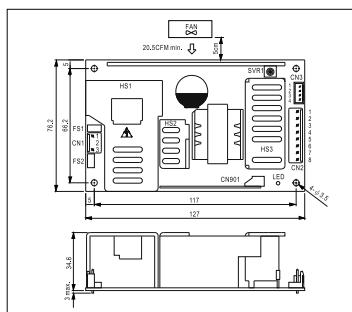

AC input voltage range	90~264VAC; 127~370VDC
AC inrush current	Cold start, 35A at 115VAC, 70A at 230VAC
DC adjustment range	RPS-160: ±10% rated output voltage RPD/T-160: 0~+10% for CH1
Overload protection	105%~135% hiccup mode, auto-recovery
Over voltage protection	CH1: 115%~135% shut off, re-power on to recovery
Leakage current	Less than 200µA at 264VAC
Setup, rise, hold up time	1800ms, 30ms, 16ms at full load and 230VAC
Withstand voltage	I/P-O/P: 4kVAC, I/P-FG: 2kVAC, 1 minute
Working temperature	-20~+70°C (refer to output derating curve)
Safety standards	ANSI/AAMI ES60601-1, TUV EN60601-1 approved
EMC standards	EN55011/EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2, EN61000-6-2 (RPS(G)-160)

❖ Single Output

Model No.	Output	Tol.	R&N	Effi.
RPS□-160-5	5V, 0~30.0A	±4%	100mV	85%
RPS□-160-12	12V, 0~12.9A	±3%	100mV	87%
RPS□-160-15	15V, 0~10.3A	±3%	120mV	87%
RPS□-160-24	24V, 0~6.5A	±2%	150mV	87%
RPS□-160-48	48V, 0~3.25A	±2%	250mV	88%

❖ Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPD□-160B	5V, 1.0~12A 24V, 0.2~3.6A	±2.5% +6%	80mV 200mV	84%	150W

❖ Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPT□-160A	5V, 0.6~14A	±2%	100mV	84%	145W
	12V, 0.2~5.5A	±5%	120mV		
	-5V, 0.1~1.0A	-5%, +7%	120mV		
RPT□-160B	5V, 0.6~14A	±2%	100mV	84%	146W
	12V, 0.2~5.0A	±5%	120mV		
	-12V, 0.1~1.0A	-4%, +5%	120mV		
RPT□-160C	5V, 0.6~14A	±2%	100mV	83%	143W
	15V, 0.1~3.6A	±4%	150mV		
	-15V, 0.1~1.0A	±8%	150mV		
RPT□-160D	5V, 0.3~11A	±2%	100mV	83%	148W
	12V, 0.2~5.0A	±5%	120mV		
	24V, 0.15~1.2A	-5%, +7%	200mV		

= blank, G; blank: basic function, G: with 5Vsb/0.8A & no load power consumption \leq 0.75W

Open Frame

200~300W 1~4 Output Medical Type




200W 1~4 Output Medical Type with PFC

- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Low leakage current $\leq 180\mu\text{A}$
- With P.G. and P.F. signal output
- Built-in remote sense and remote ON/OFF control
- 140W free air convection, 200W with 25CFM forced air
- 100% full load burn-in test
- 3 years warranty
- Suitable for medical & IT applications



177.8x 107.2x 35.5 mm

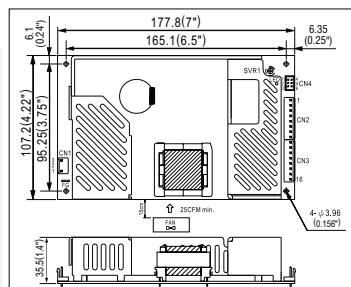

- AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 35A at 115VAC, 60A at 230VAC
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 110%~160% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~140% rated output voltage
 Leakage current Less than 180 μA at 264VAC
 Setup, rise, hold up time 1000ms, 20ms, 16ms at full load and 230VAC
 Withstand voltage I/P - O/P: 4kVAC, I/P - FG: 1.5kVAC, 1 minute
 Working temperature -20~+70°C (refer to output derating curve)
 Safety standards ANSI/AAMI ES60601-1, TUV EN60601-1,
 IEC60601-1 approved; Design refer to UL60950-1,
 TUV EN60950-1
 EMC standards EN55011/EN55022 class B,
 EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3,
 EN60601-1-2, EN61000-6-2
 Connection 3P, 20P / 3.96mm pitch, JST B3P/VH, Molex 5566-20
 3P, 8Px2 / 3.96mm pitch, JSTB3P / B8Px2-VH
 Packing 0.66kg ; 24pcs / 16.8kg / 1.04CUFT

Single Output

Model No.	Output	Tol.	R&N	Effi.
MPS-200-3.3	3.3V, 0~40A	$\pm 2\%$	80mV	77%
MPS-200-5	5V, 0~40A	$\pm 2\%$	80mV	81%
MPS-200-12	12V, 0~16.7A	$\pm 2\%$	100mV	84%
MPS-200-15	15V, 0~13.4A	$\pm 2\%$	100mV	85%
MPS-200-24	24V, 0~8.4A	$\pm 1\%$	150mV	86%
MPS-200-48	48V, 0~4.2A	$\pm 1\%$	200mV	87%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPD-200A	5V, 4.0~24A	$\pm 2\%$	80mV	82%	196W
	12V, 0.8~9.6A	+8%, -5%	120mV		
MPD-200B	5V, 4.0~24A	$\pm 2\%$	80mV	83%	196W
	24V, 0.4~4.8A	$\pm 6.5\%$	180mV		

Triple Output


Model No.	Output	Tol.	R&N	Effi.	Max.
MPT-200A	5V, 4.0~24A	$\pm 2\%$	80mV	80%	200W
	12V, 0.8~9.0A	$\pm 8\%$	120mV		
	-5V, 0.0~2.4A	$\pm 5\%$	80mV		
MPT-200B	5V, 4.0~24A	$\pm 2\%$	80mV	80%	196W
	12V, 0.6~7.2A	$\pm 8\%$	120mV		
	-12V, 0.0~2.4A	$\pm 5\%$	80mV		
MPT-200C	5V, 4.0~24A	$\pm 2\%$	80mV	80%	201W
	15V, 0.5~5.6A	$\pm 8\%$	150mV		
	-15V, 0.0~2.4A	$\pm 5\%$	80mV		
MPT-200D	5V, 4.0~24A	$\pm 2\%$	80mV	81%	196W
	24V, 0.3~3.6A	$\pm 8\%$	180mV		
	12V, 0.0~2.4A	$\pm 5\%$	80mV		

Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPQ-200B	5V, 3.0~18A	$\pm 2\%$	80mV	78%	193W
	12V, 0.7~8.4A	$\pm 8\%$	120mV		
	-5V, 0.0~2.4A	$\pm 5\%$	80mV		
	-12V, 0.0~2.4A	$\pm 5\%$	80mV		
MPQ-200C	5V, 3.0~18A	$\pm 2\%$	80mV	78%	190W
	15V, 0.5~6.0A	$\pm 6\%$	150mV		
	-5V, 0.0~2.4A	$\pm 5\%$	80mV		
	-15V, 0.0~2.4A	$\pm 5\%$	80mV		
MPQ-200D	5V, 3.0~18A	$\pm 2\%$	80mV	79%	195W
	24V, 0.3~3.6A	$\pm 8\%$	180mV		
	12V, 0.0~2.4A	$\pm 5\%$	80mV		
	-12V, 0.0~2.4A	$\pm 5\%$	80mV		
MPQ-200F	5V, 3.0~18A	$\pm 2\%$	80mV	81%	200W
	24V, 0.3~3.3A	$\pm 8\%$	180mV		
	15V, 0.0~2.4A	$\pm 5\%$	80mV		
	-15V, 0.0~2.4A	$\pm 5\%$	80mV		

300W Single Output Medical Type with PFC

- 5"x 3" compact size
- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- No load power consumption <0.5W by PS-ON control
- High efficiency up to 93%
- Built-in 12V/0.5A auxiliary output
- Built-in remote sense function
- Short circuit / Overload / Over voltage / Over temp.
- Low leakage current <300 μA
- Free air convection for 200W and 300W with 20.5 CFM forced air
- Standby 5V@1A
- With P.G and P.F. signal output
- High power density 14.5W/in³
- 3 years warranty



- AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 40A at 115VAC, 80A at 230VAC
 DC adjustment range $\pm 5\%$ rated output voltage
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection 110%~125% shut off, re-power on to recovery
 Leakage current Less than 300 μA at 264VAC
 Setup, rise, hold up time 2500ms, 30ms, 13ms at full load and 230VAC
 Withstand voltage I/P - O/P: 4kVAC, I/P - FG: 2kVAC, 1 minute
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards ANSI/AAMI ES60601-1, TUV EN60601-1
 EMC standards EN55011/EN55022 class B,
 EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3,
 EN60601-1-2

Model No.	Output	Tol.	R&N	Effi.
RPS-300-12	12V, 0~25A	$\pm 3\%$	120mV	90.0%
RPS-300-15	15V, 0~20A	$\pm 3\%$	120mV	90.0%
RPS-300-24	24V, 0~12.5A	$\pm 2\%$	150mV	92.5%
RPS-300-27	27V, 0~11.12A	$\pm 2\%$	200mV	93.0%
RPS-300-48	48V, 0~6.25A	$\pm 2\%$	250mV	93.0%

Open Frame

5~25W Single and Dual Output




5W Single Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Fixed switching frequency at 67kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CB CE



75x 40x 20 mm

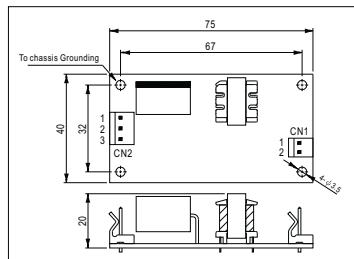

AC input voltage range 85~264VAC; 120~370VDC
 AC inrush current Cold start, 30A at 230VAC
 Overload protection >105% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Over temp. protection U1, Tj:140°C, hiccup mode, auto-recovery
 Leakage current Less than 0.5mA at 240VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~+60°C (refer to output derating curve)
 Safety standards UL60950-1 CB approval by TUV
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11
 Connection 3P/ 5mm, 2P/ 3.96mm pitch, Molex 5285-03,5273-02
 Packing 0.05kg ; 120pcs / 6.25kg / 1.0CUFT

Model No.	Output	Tol.	R&N	Effi.
PS-05-5	5V, 0~1.0A	±2%	100mV	70%
PS-05-12	12V, 0~0.45A	±2%	120mV	75%
PS-05-15	15V, 0~0.35A	±2%	120mV	75%
PS-05-24	24V, 0~0.22A	±2%	200mV	76%
PS-05-48	48V, 0~0.11A	±1%	200mV	76%


15W Single Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Fixed switching frequency at 67kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CB CE



94x 49x 25 mm

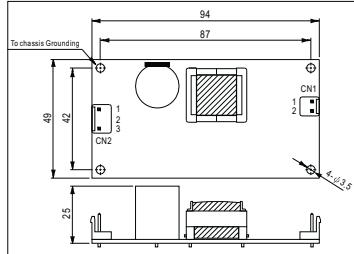

AC input voltage range 85~264VAC; 120~370VDC
 AC inrush current Cold start, 40A at 230VAC
 Overload protection >105% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Over temp. protection U1, Tj:140°C, hiccup mode, auto-recovery
 Leakage current Less than 0.5mA at 240VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~+60°C (refer to output derating curve)
 Safety standards EN60950-1 CB approval by TUV
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11
 Connection 3P, 2P/ 3.96mm pitch, JST B3P/B2P-VH
 Packing 0.083kg ; 120pcs / 10.96kg

Model No.	Output	Tol.	R&N	Effi.
PS-15-5	5V, 0~2.80A	±2%	100mV	74%
PS-15-12	12V, 0~1.25A	±2%	120mV	77%
PS-15-15	15V, 0~1.00A	±2%	120mV	78%
PS-15-24	24V, 0~0.625A	±2%	150mV	79%
PS-15-48	48V, 0~0.313A	±2%	200mV	77%


25W 1~2 Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Fixed switching frequency at 100kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CB CE



107x 61x 28 mm

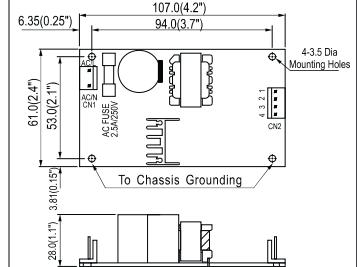

AC input voltage range 85~264VAC; 120~370VDC
 AC inrush current Cold start, 36A at 230VAC
 Overload protection >105% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Over temp. protection U1, Tj:135°C, power shutdown
 Leakage current Less than 0.5mA at 240VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~+60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5
 Connection 3P, 4P/ 3.96mm pitch, Molex P/N: 41791-03, 04
 Packing 0.14kg ; 96pcs / 15.0kg / 1.30CUFT(PS-25)
 0.15kg ; 96pcs / 15.9kg / 1.30CUFT(PD-25)
 0.13kg ; 96pcs / 15.4kg / 1.30CUFT(PD-2503)

Single Output

Model No.	Output	Tol.	R&N	Effi.
PS-25-3.3	3.3V, 0~5.0A	±3%	80mV	66%
PS-25-5	5V, 0~5.0A	±2%	80mV	74%
PS-25-7.5	7.5V, 0~3.3A	±2%	80mV	76%
PS-25-12	12V, 0~2.1A	±2%	100mV	78%
PS-25-13.5	13.5V, 0~1.9A	±2%	100mV	78%
PS-25-15	15V, 0~1.7A	±2%	100mV	78%
PS-25-24	24V, 0~1.0A	±2%	240mV	79%
PS-25-27	27V, 0~0.9A	±2%	240mV	79%
PS-25-48	48V, 0~0.5A	±2%	350mV	79%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PD-25A	5V, 0.2~2.5A	±2%	50mV	71%	25W
	12V, 0.1~1.5A	±6%	150mV		
PD-25B	5V, 0.2~2.0A	±2%	50mV	77%	25W
	24V, 0.1~1.0A	±6%	200mV		
PD-2505	5V, 0.1~3.0A	±6%	50mV	73%	25W
	-5V, 0.1~2.5A	±6%	50mV		
PD-2512	12V, 0.1~1.2A	±4%	50mV	74%	24W
	-12V, 0.1~1.2A	±4%	50mV		
PD-2515	15V, 0.1~1.0A	±4%	50mV	75%	24W
	-15V, 0.1~1.0A	±4%	50mV		
PD-2503	3.3V, 0.2~5.0A	±2%	50mV	72%	25W
	5V, 0.1~4.0A	+5%, -8%	50mV		

Open Frame


35~45W Single, Dual, and Triple Output



35W Single Output Switching Power Supply

- Universal AC input / Full range
- Cooling by free air convection
- Protections: Short circuit / Overload / Over voltage
- 2 years warranty

CB CE

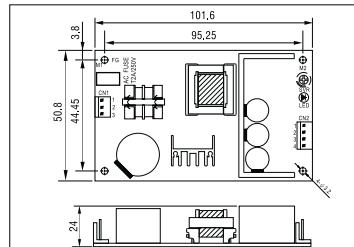

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range ±10% rated output voltage
 Overload protection 105%~160% hiccup mode, auto-recovery
 Over voltage protection 115%~150% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -20°C~+65°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11
 Connection 3+4P / 3.96mm pitch, JST B3P/B4P-VH
 Packing 0.124kg; 96pcs / 12.9kg / 0.8CUFT

Model No.	Output	Tol.	R&N	Effi.
PS-35-3.3	3.3V, 0~6.0A	±2%	80mV	70%
PS-35-5	5V, 0~6.0A	±2%	100mV	78%
PS-35-7.5	7.5V, 0~4.7A	±2%	100mV	80%
PS-35-12	12V, 0~3.0A	±1%	120mV	81%
PS-35-13.5	13.5V, 0~2.6A	±1%	120mV	81%
PS-35-15	15V, 0~2.4A	±1%	150mV	81%
PS-35-24	24V, 0~1.5A	±1%	200mV	85%
PS-35-48	48V, 0~0.75A	±1%	240mV	84%

GSM40/60 Series
40W/60W
Green Medical Adaptor


Under Development

- Universal AC input / Full range
- No load power consumption <0.1W
- Meet ErP step 2
- Meet EISA 2007(Energy Independence and Security Act)
- Class I power (with earth pin)
- 3 pole AC inlet IEC320-C14 (Desktop style)
- Fully enclosed plastic case
- Protections: Short circuit / Overload / Over voltage
 Over temperature (GSM60)
- LED indicator for power on
- Pass LPS
- Design refer to IEC/EN60601-1, ANSI/AAMI ES60601-1
- Output models: 5V / 7.5V / 9V / 12V / 15V / 18V / 24V / 48V
- 3 years warranty

45W 1~3 Output Switching Power Supply

- Universal AC input / Full range
- Cooling by free air convection
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 65kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CB CE

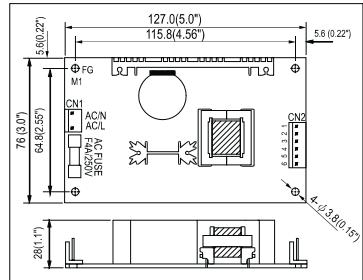

AC input voltage range ... 90~264VAC; 127~370VDC
 AC inrush current Cold start, 15A at 115VAC, 30A at 230VAC
 DC adjustment range CH1: -5%~+10% rated output voltage
 Overload protection 53~75W hiccup mode, auto-recovery
 Over voltage protection .. CH1: 115%~135% rated output voltage
 Leakage current Less than 0.5mA at 240VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~+60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11
 Connection 2P, 6P / 3.96mm pitch, Molex 5277-02 / 5273-06
 Packing 0.19kg ; 72pcs / 15.6kg / 1.35CUFT(PS-45)
 0.20kg ; 72pcs / 16.0kg / 1.35CUFT(PD-45)
 0.21kg ; 72pcs / 17.0kg / 1.35CUFT(PT-45)

♦ Single Output

Model No.	Output	Tol.	R&N	Effi.
PS-45-3.3	3.3V, 0~8.0A	±3%	80mV	69%
PS-45-5	5V, 0~8.0A	±3%	100mV	74%
PS-45-7.5	7.5V, 0~5.4A	±3%	100mV	75%
PS-45-12	12V, 0~3.7A	±2%	100mV	76%
PS-45-13.5	13.5V, 0~3.3A	±2%	100mV	77%
PS-45-15	15V, 0~3.0A	±2%	100mV	77%
PS-45-24	24V, 0~1.9A	±2%	100mV	78%
PS-45-27	27V, 0~1.7A	±2%	100mV	78%
PS-45-48	48V, 0~1.0A	±2%	100mV	78%

♦ Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PD-45A	5V, 0.4~5.0A	±4%	50mV	77%	40W
	12V, 0.2~2.5A	±7%	120mV		
PD-45B	5V, 0.4~5.0A	±4%	50mV	78%	45W
	24V, 0.2~1.8A	±7%	120mV		

♦ Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-45A	5V, 0.4~5.0A	±4%	50mV	75%	41W
	12V, 0.2~2.5A	±7%	120mV		
	-5V, 0.0~0.5A	±5%	50mV		
PT-45B	5V, 0.4~5.0A	±4%	50mV	75%	43W
	12V, 0.2~2.5A	±7%	120mV		
	-12V, 0.0~0.5A	±5%	100mV		
PT-45C	5V, 0.4~5.0A	±4%	50mV	75%	44W
	15V, 0.2~2.3A	±7%	120mV		
	-15V, 0.0~0.5A	±5%	100mV		

Open Frame

45~65W Single, Dual, and Triple Output




45 & 65W Triple Output with 3.3V Channel

- Universal AC input / Full range
- Total power for CH1+2: 35W (PT-45)
- Total power for CH1+2: 54W (PT-65)
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 65kHz
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

CB CE




PT-4503
127x 76x 28 mm



CB CE



PT-6503
127x 76x 42 mm



AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC

DC adjustment range 3.3V: ±10% rated output voltage

Overload protection 120%~160% hiccup mode, auto-recovery

Over voltage protection 5V: 115%~135% rated output voltage

Leakage current Less than 1.0mA at 240VAC

Setup, rise, hold up time 800ms, 50ms, 60ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,11

Connection 2P, 8P / 3.96mm pitch, Molex: 5277-02, 5273-08

Packing 0.23kg ; 72pcs / 17.6kg / 1.35CUFT(PT-4503)
0.28kg ; 54pcs / 16.2kg / 1.35CUFT(PT-6503)

Triple Output (45W)

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-4503	3.3V, 0.0~5.0A	±2%	50mV	72%	45W
	5V, 0.2~7.0A	+4%, -2%	50mV		
	12V, 0.0~1.2A	±8%	100mV		

Triple Output (65W)

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-6503	3.3V, 0.0~7.0A	±3%	50mV	72%	62W
	5V, 0.2~10A	+4%, -2%	50mV		
	12V, 0.0~1.2A	±8%	100mV		




48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.


65W 1~3 Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CB CE



127x 76x 42 mm

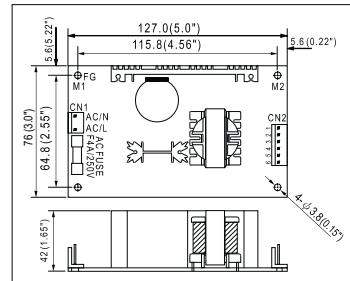

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC

DC adjustment range CH1: -5%~+10% rated output voltage

Overload protection 73~105W hiccup mode, auto-recovery

Over voltage protection CH1: 115%~135% rated output voltage

Leakage current Less than 0.5mA at 240VAC

Setup, rise, hold up time 800ms, 20ms, 60ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,

EN61000-4-2,3,4,5,6,8,11

Connection 2P, 6P / 3.96mm pitch, Molex P/N: 5277-02, 5273-06

Packing 0.21kg ; 54pcs / 14.2kg / 1.35CUFT(PS-65)
0.24kg ; 54pcs / 15.0kg / 1.35CUFT(PD-65)
0.25kg ; 54pcs / 15.9kg / 1.35CUFT(PT-65)

Single Output

Model No.	Output	Tol.	R&N	Effi.
PS-65-3.3	3.3V, 0~12A	±3%	80mV	69%
PS-65-5	5V, 0~12A	±3%	100mV	76%
PS-65-7.5	7.5V, 0~8.0A	±3%	100mV	79%
PS-65-12	12V, 0~5.2A	±2%	100mV	79%
PS-65-13.5	13.5V, 0~4.7A	±2%	100mV	79%
PS-65-15	15V, 0~4.2A	±2%	100mV	79%
PS-65-24	24V, 0~2.7A	±2%	100mV	80%
PS-65-27	27V, 0~2.4A	±2%	100mV	80%
PS-65-48	48V, 0~1.35A	±2%	100mV	80%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PD-65A	5V, 0.4~7.0A	±4%	50mV	78%	61W
	12V, 0.2~3.2A	±7%	120mV		
PD-65B	5V, 0.4~6.0A	±4%	50mV	81%	66W
	24V, 0.2~2.6A	±7%	150mV		

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-65A	5V, 0.4~7.0A	±4%	50mV	76%	60W
	12V, 0.2~3.2A	±7%	120mV		
	-5V, 0.0~0.7A	±5%	50mV		
PT-65B	5V, 0.4~7.0A	±4%	50mV	77%	64W
	12V, 0.2~3.2A	±7%	120mV		
	-12V, 0.0~0.7A	±5%	100mV		
PT-65C	5V, 0.4~7.0A	±4%	50mV	77%	65W
	15V, 0.2~2.6A	±7%	120mV		
	-15V, 0.0~0.7A	±5%	100mV		
PT-65D	5V, 0.5~5.0A	±4%	50mV	79%	68W
	12V, 0.2~4.0A	±6%	100mV		
	24V, 0.2~1.3A	±6%	200mV		


Open Frame

65~110W Dual, Triple, and Quad Output




65W 2, 3 Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 12V or 24V high peak current capability
- 60~65W free air convection, 77~80W with 18 CFM forced air
- Low leakage current < 1mA
- 100% full load burn-in test
- Optional case available (RPD/RPT-65x-C)**
- 2 years warranty capability



With Optional Case



AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 25A at 115VAC, 50A at 230VAC
 DC adjustment range CH1 12V: 11.4~12.8V, 24V: 22.8~26.4V
 Overload protection 90~125W hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Leakage current Less than 1mA at 240VAC
 Setup, rise, hold up time 800ms, 20ms, 20ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -20~+60°C(refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11

Connection 3P, 6P/ 3.96mm pitch, Molex P/N: 5273-03,
 5273-06

Packing 0.24kg ; 63pcs / 16.0kg / 1.35CUFT

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPD-65C□	12V, 0~5.8A	±2%	120mV	79%	60W
	5V, 0~1.5A	±5%	50mV		
RPD-65D□	24V, 0~2.9A	±2%	150mV	81%	60W
	5V, 0~1.5A	±5%	50mV		

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-65E□	12V, 0.18~5.8A	±2%	120mV	77%	63W
	5V, 0.0~1.5A	±5%	100mV		
	-5V, 0.0~0.7A	±5%	120mV		
RPT-65F□	12V, 0.18~5.8A	±2%	150mV	77%	66W
	5V, 0.0~1.5A	±5%	100mV		
	-12V, 0.0~0.7A	±5%	150mV		
RPT-65G□	24V, 0.09~2.9A	±2%	150mV	81%	66W
	5V, 0.0~1.5A	±5%	50mV		
	12V, 0.0~0.7A	±5%	100mV		

□ = blank, -C ; blank: PCB Type, -C: Enclosed Type

100~110W 2, 4 Output Switching Power Supply

- Universal AC input / Full range
- Power good signal output (option)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Fixed switching frequency at 45kHz
- 100% full load burn-in test
- Low leakage current <1mA@ 240VAC
- 2 years warranty




CB CE



PD-110

177.8x 107.95x 46.5 mm

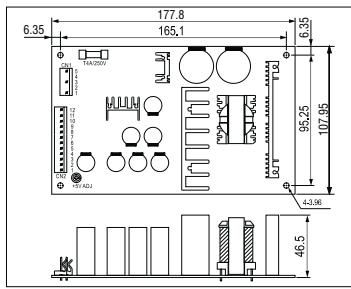


CB CE



PQ-100

177.8x 107.95x 46.5 mm

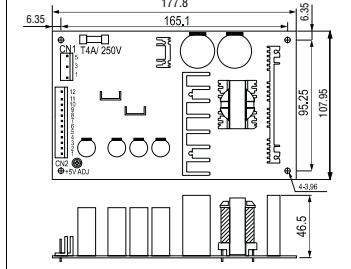

AC input voltage range .. 100~264VAC; 141~370VDC

AC inrush current Cold start, 45A at 230VAC

DC adjustment range CH1: -5%~+10% rated output voltage

Overload protection 105%~135% hiccup mode, auto-recovery

Over voltage protection ..CH1: 115%~135% rated output voltage

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,11

Connection 5+12P/ 3.96mm pitch, Molex: 5273-05,12(PD-110)

5+6+7P/ 3.96mm pitch, Molex: 5273-05,06,07(PQ-100)

Packing 0.51kg ; 24pcs / 13.1kg / 1.19CUFT (PD-110)

0.56kg ; 24pcs / 14.5kg / 1.19CUFT (PQ-100)

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PD-110A	5V, 0.5~5.0A	±2%	100mV	75%	103W
	12V, 0.5~6.5A	±6%	150mV		
PD-110B	5V, 0.5~5.0A	±2%	100mV	78%	109W
	24V, 0.5~3.5A	±6%	200mV		

Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PQ-100B	5V, 2.0~10A	±3%	80mV	72%	101W
	12V, 0.5~4.5A	±12%	250mV		
	-5V, 0.0~1.0A	±6%	80mV		
	-12V, 0.0~1.0A	±6%	120mV		
PQ-100C	5V, 2.0~8.0A	±2%	80mV	74%	103W
	15V, 0.5~4.0A	±6%	150mV		
	-5V, 0.0~1.0A	±6%	80mV		
	-15V, 0.0~1.0A	±6%	150mV		
PQ-100D	5V, 2.0~5.0A	±2%	80mV	77%	103W
	12V, 0.5~4.5A	±6%	120mV		
	24V, 0.4~2.0A	±10%	180mV		
	-12V, 0.0~1.0A	±6%	120mV		
PQ-100E	5V, 2.0~8.0A	±2%	80mV	74%	99W
	12V, 0.5~3.0A	±6%	120mV		
	15V, 0.0~1.0A	±6%	150mV		
	24V, 0.0~1.0A	±6%	120mV		

Open Frame 100~125W Single, Triple, and Quad Output




100W Quad Output with PFC Function

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 3 years warranty



178x 108x 38 mm



AC input voltage range .. 90~264VAC; 127~370VDC

AC inrush current Cold start, 50A at 230VAC

DC adjustment range CH1: -5%~+10% (PPQ-1003: CH1&2 -5%~+10%)

Overload protection 105%~135% hiccup mode, auto-recovery (PPQ-100)
105%~135% constant current, auto-recovery (PPQ-1003)

Over voltage protection .. 3.6V~4.3V for 3.3V ; 5.75V~6.75V for 5.0V

Leakage current Less than 3.5mA at 240VAC (PPQ-1003: <1mA)

Setup, rise, hold up time .. 800ms, 50ms, 18ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:2kVAC, 1minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved


EMC standards EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,8,11

Connection 5P+5P+8P/ 3.96mm pitch, P/N:JST B5/5P-VH (PPQ-100)
3P+5P+8P/ 3.96mm pitch, P/N:JST B3/5/8P-VH (PPQ-1003)

Packing 0.62kg ; 24pcs / 15.5kg / 1.34CUFT (PPQ-1003)
0.62kg ; 24pcs / 15.9kg / 1.34CUFT (PPQ-100)

125W 1,3 Output with PFC Function

- Universal AC input/ Full range
- Built-in active PFC function
- High power density 6.117W/in³
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection for 100W and 125W with 18 CFM forced air
- 100% full load burn-in test
- 3 years warranty
- Built-in remote sense for PPS-125

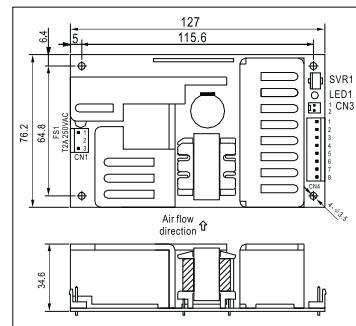

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 24A at 230VAC

DC adjustment range CH1: ±5% rated output voltage

Overload protection 130%~160% fold back current limiting, auto-recovery

Over voltage protection CH1:110%~135% rated output voltage

Leakage current Less than 2.0mA at 240VAC

Setup, rise, hold up time 1000ms, 30ms, 24ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -20~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,8,11

Connection 3+8P / 3.96mm pitch, JST: B3P/B8P-VH (PPS-125)
3+5Px2 / 3.96mm pitch, JST: B3P/B5Px2-VH (PPT-125)

Packing 0.37kg; 36pcs / 14.3kg / 0.79CUFT

♦ Single Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PPQ-1003A	3.3V, 0.0~15A	±3%	100mV	75%	109W
	5V, 2.0~15A	±3%	100mV		
	12V, 0.2~3.0A	±6%	150mV		
	-5V, 0.0~1.0A	±6%	100mV		
PPQ-1003B	3.3V, 0.0~15A	±3%	100mV	75%	111W
	5V, 2.0~15A	±3%	100mV		
	12V, 0.2~3.0A	±6%	150mV		
	-12V, 0.0~1.0A	±6%	120mV		
PPQ-1003C	3.3V, 0.0~15A	±3%	100mV	76%	110W
	5V, 2.0~15A	±3%	100mV		
	15V, 0.2~3.0A	+10%, -5%	180mV		
	-15V, 0.0~1.0A	±6%	150mV		
PPQ-1003D	3.3V, 0.0~15A	±3%	100mV	76.5%	114W
	5V, 2.0~15A	±3%	100mV		
	12V, 0.2~3.0A	+7%, -2%	150mV		
	24V, 0.0~1.0A	±6%	150mV		
PPQ-100B	5V, 2.0~15A	±3%	100mV	75%	101W
	12V, 0.3~4.0A	±8%	150mV		
	-12V, 0.0~1.0A	±5%	100mV		
	-5V, 0.0~1.0A	±5%	100mV		
PPQ-100C	5V, 2.0~15A	±3%	100mV	76%	101W
	15V, 0.3~4.0A	-6%, +10%	150mV		
	-15V, 0.0~1.0A	±5%	100mV		
	-5V, 0.0~1.0A	±5%	100mV		
PPQ-100D	5V, 2.0~10A	±3%	100mV	78%	102W
	24V, 0.3~4.0A	±8%	200mV		
	12V, 0.0~1.0A	±5%	100mV		
	-12V, 0.0~1.0A	±5%	100mV		

♦ Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PPT-125A	3.3V, 1.0~12.5A	±3%	100mV	75%	99W
	5V, 0.8~10.0A	±5%	100mV		
	12V, 0.05~0.63A	±6%	120mV		
	5V, 1.0~14.38A	±3%	100mV		124W
PPT-125B	12V, 0.3~3.75A	±5%	120mV	78%	
	-12V, 0.05~0.63A	±6%	120mV		
	5V, 1.0~13.75A	±3%	100mV		125W
	15V, 0.25~3.13A	±5%	150mV		
PPT-125C	-15V, 0.05~0.63A	±6%	150mV	78%	
	5V, 1.0~8.75A	±3%	100mV		126W
	24V, 0.25~3.13A	±5%	240mV		
	12V, 0.05~0.63A	±6%	120mV		
PPT-125D	5V, 1.0~12.5A	±3%	100mV	78%	
	24V, 0.25~3.13A	±5%	240mV		
	12V, 0.05~0.63A	±6%	120mV		


Open Frame

150~250W Single and Dual Output



150W Single Output with PFC Function

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Over load / Over voltage / Over temp.
- Cooling by free air convection
- High power density 8.4W/in³
- No load power consumption<1W
- 100% full load burn-in test
- 3 years warranty

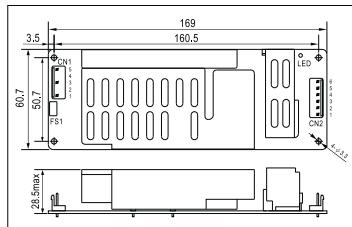

AC input voltage range90~264VAC ; 127~370VDC

DC adjustment rangeCan be modified between ±10% rated output voltage by factory

Overload protection105%~135% hiccup mode, auto-recovery

Over voltage protection110%~135% rated output voltage

Withstand voltageI/P-O/P: 4.25kVDC, I/P-FG:1.5kVAC, 1minute

Working temperature-20~+60°C (refer to output derating curve)

Safety standardsUL60950-1 approved

EMC standardsEN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11


Connection5+P / 3.96mm pitch, JST P/N :B5P / B6P-VH

Packing0.32kg ; 48pcs / 15.8kg / 0.79CUFT

Model No.	Output	Tol.	R&N	Effi.
ASP-150-12	12V, 0~11A	±2%	150mV	88%
ASP-150-15	15V, 0~9.5A	±2%	180mV	88%
ASP-150-20	20V, 0~7.5A	±1%	200mV	90%
ASP-150-24	24V, 0~6.3A	±1%	240mV	90%
ASP-150-48	48V, 0~3.2A	±1%	240mV	89%

200W Single Output with PFC Function

- Universal AC input / Full range
- High efficiency up to 90%
- PF>0.98@115VAC; >0.93@230VAC
- Protections: Short circuit / Over load / Over voltage / Over temp.
- ZVS technology to reduce power dissipation
- Built-in remote sense function
- Free air convection for 150W and 200W with 20.5 CFM forced air
- High power density 9.78W/in³
- 5"x3" compact size
- 3 years warranty



AC input voltage range90~264VAC; 127~370VDC

DC adjustment range±10% rated output voltage

Overload protection105%~135% hiccup mode, auto-recovery

Over voltage protection115%~135% rated output voltage

Withstand voltageI/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature-20~+70°C (refer to output derating curve)

Safety standardsUL60950-1, TUV EN60950-1 approved

EMC standardsEN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11



Connection3+8P / 3.96mm pitch, JST B3P / B8P-VH

Packing0.37kg ; 36pcs / 14.3kg / 0.79CUFT

Model No.	Output	Tol.	R&N	Effi.
PPS-200-5	5V, 0~36.0A	±4%	100mV	86%
PPS-200-12	12V, 0~16.6A	±3%	100mV	89%
PPS-200-15	15V, 0~13.3A	±3%	100mV	89%
PPS-200-24	24V, 0~8.30A	±2%	150mV	89%
PPS-200-27	27V, 0~7.40A	±2%	150mV	89%
PPS-200-48	48V, 0~4.167A	±2%	250mV	90%

250W Isolated Dual Output with PFC Function

- Universal AC input / Full range
- Isolated output & GND for CH1,CH2
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Optional case available
- Cooling by free air convection
- Remote control function for CH1
- Peak load 170% for 10 sec. (CH1)
- 100% full load burn-in test
- 3 years warranty

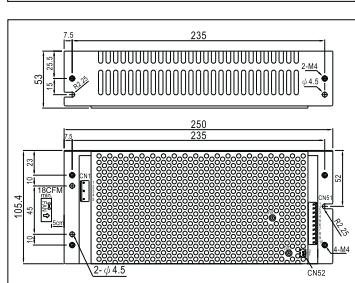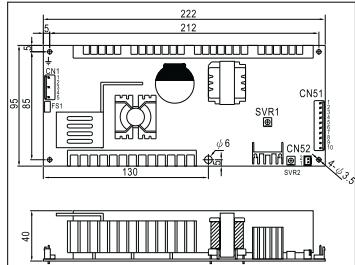

AC input voltage range90~264VAC; 127~370VDC

AC inrush currentCold start, 58A at 230VAC

Leakage currentLess than 3.5mA at 240VAC

DC adjustment range±10% for CH1; ±5% for CH2

Overload protection(CH1)105%~170% normally operation, shut off after 10 sec.; >180%, constant current, shut off after 10 sec.

(CH2)101%~150% hiccup mode, auto-recovery

Over voltage protectionCH1: 115%~140%, CH2: 110%~135%

Setup, rise, hold up time1200ms, 60ms, 30ms at full load and 230VAC

Withstand voltageI/P-O/P: 3.0kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature-20~+70°C (refer to output derating curve)

Safety standardsUL60950-1, TUV EN60950-1 approved

EMC standardsEN55022 class B, EN61000-3-2,-3

EN61000-4-2,3,4,5,6,8,11, EN61000-6-2

Connection5+10+2P/3.96mm pitch JST B5P/B10P-VH, B2B-XH

Packing0.74kg ; 18pcs / 14.3Kg / 0.88CUFT

Model No.	Output	Tol.	R&N	Effi.
PID-250A	12V, 0~15A	±3%	120mV	83%
	5V, 0~5.0A	±2%	50mV	
PID-250B	24V, 0~9.4A	±2%	150mV	86%
	5V, 0~5.0A	±2%	50mV	
PID-250C	36V, 0~6.3A	±2%	200mV	86%
	5V, 0~5.0A	±2%	50mV	
PID-250D	48V, 0~4.7A	±2%	200mV	86%
	5V, 0~5.0A	±2%	50mV	


► Feature Description

PID-250 series is suitable for motor-based equipment with logic control circuit. CH1 with high peak power capability can provide the required surge loading while starting up the motor. The isolated 5V/5A CH2 is good for logic control usage and can still work properly even CH1 is malfunction or at any protection modes. The isolated design between CH1 and CH2 can significantly prevent noise of the motor action from entering control circuits and hence secure the accurate operation of the end equipment.



Features

- Universal AC input / Full range
- Built-in active PFC function (LPP-100/150)
- Protections: Short circuit / Overload / Over voltage
- Optional over temperature protection for LPP-150
- Built-in remote ON/OFF control (LPS-50/75)
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty for LPS series
3 years warranty for LPP series

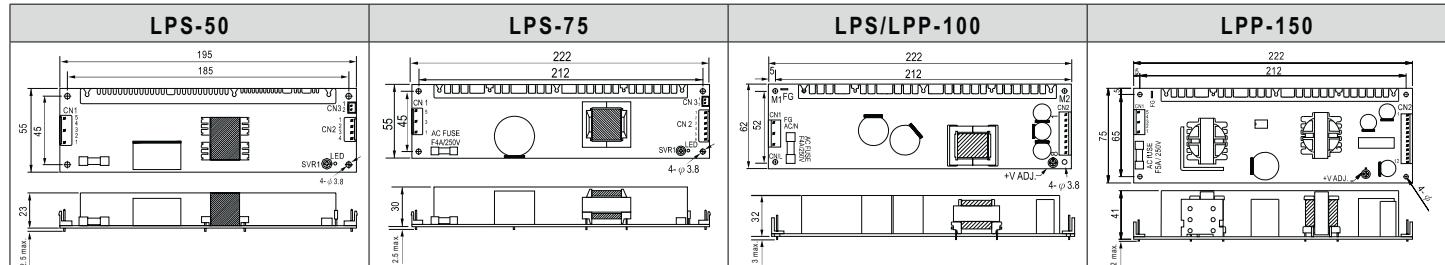

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	LPS-50	LPS-75	LPS-100	LPP-100	LPP-150
AC input voltage range	90~264VAC		115/230 auto switch	85~264VAC	
AC inrush current (230VAC)	35A	36A	60A	30A	40A
DC adjustment range	±10% rated output voltage			-5%~+10% rated output voltage	
Overload protection	Range: 122%~160% Type: Hiccup mode, auto recovery	115%~150%	105%~140%	105%~150% rated output power	
Over voltage protection	Range: 110%~135% of rated output voltage Type: Hiccup mode, auto recovery			Shut off, AC recycle to re-start	
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, O/P-FG: 0.5kVAC, 1 minute				
Working temperature	-20~+70°C (refer to output derating curve)	-10~+60°C (refer to output derating curve)			
Safety standards	UL60950-1, TUV EN60950-1 approved				
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11 (EN61000-6-2 heavy industry level for LPS-50/75 only)				
Connection	JST B5P / B4P-VH	JST B5P / B6P-VH	5P+8P/3.96mm pitch, JST B5P / B8P-VH	JST B5P / B6Px2-VH	
Dimension (LxWxH)(mm)	195x 55x 23	222x 55x 30	222x 62x 32		222x 75x 41
Packing	48pcs / 12.5kg	48pcs / 15.6kg	24pcs / 12.5kg	24pcs / 13.9kg	24pcs / 16.6kg

50W

LPS-50

Model No.	Output	Tol.	R&N	Effi.
LPS-50-3.3	3.3V, 0~10A	±3%	50mV	75%
LPS-50-5	5V, 0~10A	±3%	50mV	81%
LPS-50-12	12V, 0~4.2A	±2%	80mV	82%
LPS-50-15	15V, 0~3.4A	±2%	80mV	84%
LPS-50-24	24V, 0~2.1A	±1%	80mV	85%
LPS-50-48	48V, 0~1.1A	±1%	100mV	86%

LPS-100-24	24V, 0~4.2A	±1%	150mV	80%
LPS-100-27	27V, 0~3.8A	±1%	150mV	81%
LPS-100-48	48V, 0~2.1A	±1%	200mV	81%

100W (with PFC Function)

LPP-100

Model No.	Output	Tol.	R&N	Effi.
LPP-100-3.3	3.3V, 0~20A	±2%	100mV	69%
LPP-100-5	5V, 0~20A	±2%	100mV	75%
LPP-100-7.5	7.5V, 0~13.5A	±2%	100mV	76%
LPP-100-12	12V, 0~8.5A	±2%	100mV	79%
LPP-100-13.5	13.5V, 0~7.5A	±2%	100mV	79%
LPP-100-15	15V, 0~6.7A	±2%	100mV	80%
LPP-100-24	24V, 0~4.2A	±1%	150mV	83%
LPP-100-27	27V, 0~3.8A	±1%	150mV	83%
LPP-100-48	48V, 0~2.1A	±1%	250mV	83%

150W (with PFC Function)

LPP-150

Model No.	Output	Tol.	R&N	Effi.
LPP-150-3.3	3.3V, 0~30A	±2%	150mV	66%
LPP-150-5	5V, 0~30A	±2%	100mV	72%
LPP-150-7.5	7.5V, 0~20A	±2%	100mV	76%
LPP-150-12	12V, 0~12.5A	±2%	100mV	79%
LPP-150-13.5	13.5V, 0~11.2A	±2%	100mV	80%
LPP-150-15	15V, 0~10A	±2%	100mV	80%
LPP-150-24	24V, 0~6.3A	±1%	150mV	83%
LPP-150-27	27V, 0~5.6A	±1%	150mV	83%
LPP-150-48	48V, 0~3.2A	±1%	250mV	83%

75W

LPS-75

Model No.	Output	Tol.	R&N	Effi.
LPS-75-3.3	3.3V, 0~15A	±3%	80mV	69%
LPS-75-5	5V, 0~15A	±3%	80mV	77%
LPS-75-12	12V, 0~6.2A	±2%	100mV	80%
LPS-75-15	15V, 0~5.0A	±2%	100mV	81%
LPS-75-24	24V, 0~3.2A	±2%	120mV	83%
LPS-75-48	48V, 0~1.56A	±2%	120mV	83%

100W

LPS-100

Model No.	Output	Tol.	R&N	Effi.
LPS-100-3.3	3.3V, 0~20A	±3%	150mV	69%
LPS-100-5	5V, 0~20A	±3%	100mV	77%
LPS-100-7.5	7.5V, 0~13.3A	±2%	100mV	77%
LPS-100-12	12V, 0~8.4A	±2%	100mV	79%
LPS-100-13.5	13.5V, 0~7.5A	±2%	100mV	79%
LPS-100-15	15V, 0~6.7A	±2%	100mV	80%


Green Open Frame

15~65W Single Output



Features

- Compact size
- Universal AC input / Full range
- **No load power consumption < 0.3W**
- High efficiency up to 90%
- Cooling by free air convection
- Protections: Short circuit / Overload / Over voltage
- Case available (EPS-45-x-C & EPS-65-x-C)
- LED indicator for power on
- 3 years warranty

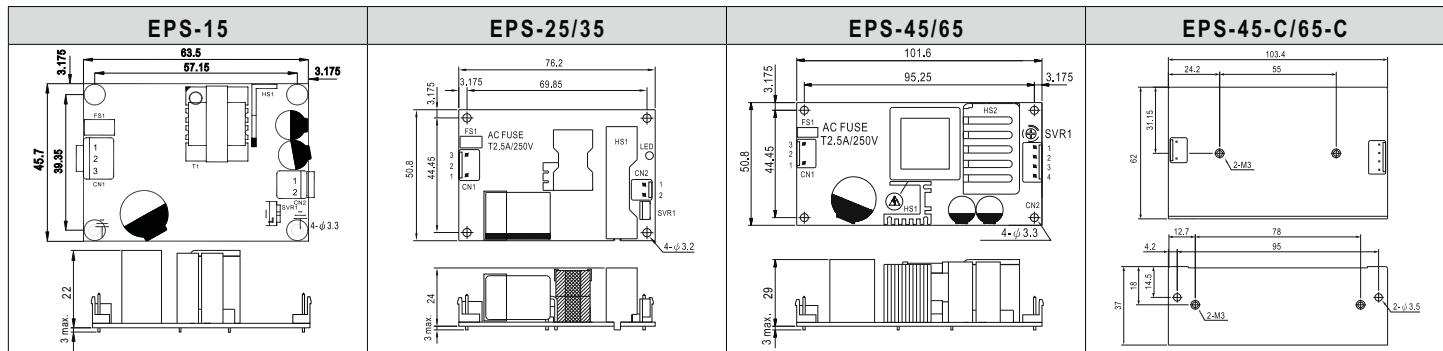

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	EPS-15 (Under Development)	EPS-25	EPS-35	EPS-45-(C)	EPS-65-(C)				
AC input voltage range	85~264VAC; 120~370VDC			90~264VAC; 127~370VDC					
AC inrush current (max.)	Cold start, 30A/230VAC	Cold start, 35A/230VAC	Cold start, 40A/230VAC	Cold start, 60A/230VAC					
DC adjustment range	±10% rated output voltage								
Overload protection	<table border="1"> <tr> <td>Range</td> <td>115%~150% rated output power</td> </tr> <tr> <td>Type</td> <td>Hiccup mode, auto recovery</td> </tr> </table>	Range	115%~150% rated output power	Type	Hiccup mode, auto recovery		115%~170% rated output power	115%~160% rated output power	
Range	115%~150% rated output power								
Type	Hiccup mode, auto recovery								
Over voltage protection	<table border="1"> <tr> <td>Range</td> <td>110%~135%</td> </tr> <tr> <td>Type</td> <td>Shut down o/p voltage, re-power on to recover</td> </tr> </table>	Range	110%~135%	Type	Shut down o/p voltage, re-power on to recover	110%~140%		110%~135%	
Range	110%~135%								
Type	Shut down o/p voltage, re-power on to recover								
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, O/P-FG: 0.5kVAC, 1 minute								
Working temperature	-30~+70°C (refer to output derating curve)								
Safety standards	UL60950-1, TUV EN60950-1 approved (EPS-15 pending)								
EMC standards	EN55022 Class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11								
Connection	3+2P / 3.96mm pitch, JST B3P/B2P-VH			3+4P / 3.96mm pitch, JST B3P/B4P-VH					
Dimension (LxWxH)(mm)	63.5x 45.7x 22	76.2x 50.8x 24		PCB: 101.6x 50.8 x29 ; Case: 103.4x 62x 37					

15W

Under Development EPS-15

Model No.	Output(Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-15-3.3	3.3V, 0~3A / 3.3A	±2%	50mV	75%
EPS-15-5	5V, 0~3A / 3.3A	±2%	50mV	78%
EPS-15-7.5	7.5V, 0~2A / 2.2A	±2%	80mV	79%
EPS-15-12	12V, 0~1.25A / 1.38A	±1%	80mV	80%
EPS-15-15	15V, 0~1A / 1.1A	±1%	100mV	80%
EPS-15-24	24V, 0~0.625A / 0.69A	±1%	150mV	83%
EPS-15-27	27V, 0~0.56A / 0.615A	±1%	180mV	84%
EPS-15-36	36V, 0~0.42A / 0.46A	±1%	200mV	85%
EPS-15-48	48V, 0~0.313A / 0.344A	±1%	200mV	85%

Model No.	Output(Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-35-24	24V, 0~1.5A / 1.65A	±1%	180mV	89%
EPS-35-27	27V, 0~1.3A / 1.45A	±1%	180mV	89%
EPS-35-36	36V, 0~1A / 1.1A	±1%	200mV	89%
EPS-35-48	48V, 0~0.75A / 0.82A	±1%	240mV	90%

45W

NEW EPS-45

Model No.	Output(Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-45-3.3	3.3V, 0~8A / 9A	±3%	80mV	80%
EPS-45-5	5V, 0~8A / 9A	±2%	80mV	82%
EPS-45-7.5	7.5V, 0~5.4A / 6A	±2%	100mV	84%
EPS-45-12	12V, 0~3.75A / 4.2A	±2%	120mV	87%
EPS-45-15	15V, 0~3A / 3.3A	±2%	150mV	88%
EPS-45-24	24V, 0~1.9A / 2.1A	±1%	240mV	89%
EPS-45-36	36V, 0~1.25A / 1.4A	±1%	280mV	89%
EPS-45-48	48V, 0~1A / 1.1A	±1%	300mV	90%

□= blank, -C ; blank: PCB type, -C: Enclosed type

65W

NEW EPS-65

Model No.	Output(Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-65-3.3	3.3V, 0~11A / 12A	±3%	80mV	80%
EPS-65-5	5V, 0~11A / 12A	±2%	80mV	82%
EPS-65-7.5	7.5V, 0~8A / 8.8A	±2%	100mV	84%
EPS-65-12	12V, 0~5.42A / 6A	±2%	120mV	86%
EPS-65-15	15V, 0~4.34A / 4.8A	±2%	150mV	87%
EPS-65-24	24V, 0~2.71A / 3A	±1%	240mV	88%
EPS-65-36	36V, 0~1.81A / 2A	±1%	280mV	89%
EPS-65-48	48V, 0~1.36A / 1.5A	±1%	300mV	90%

□= blank, -C ; blank: PCB type, -C: Enclosed type

35W

NEW EPS-35

Model No.	Output(Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-35-3.3	3.3V, 0~6A / 6.6A	±2.5%	60mV	80%
EPS-35-5	5V, 0~6A / 6.6A	±2.0%	70mV	82%
EPS-35-7.5	7.5V, 0~4.7A / 5.2A	±2.0%	80mV	84%
EPS-35-12	12V, 0~3A / 3.3A	±1.0%	100mV	87%
EPS-35-15	15V, 0~2.4A / 2.65A	±1.0%	100mV	88%

Green Open Frame

75~300W Single Output




75W Single Output with PFC Function

- Universal AC input / Full range
- Built-in active PFC function
- No load power consumption <0.5W**
- High efficiency up to 90%
- Cooling by free air convection



175x 60x 27 mm 195x 68.5x 33 mm

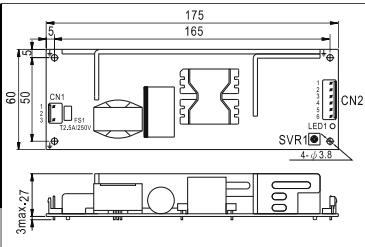

- Protections:
Short circuit / Overload / Over voltage
- Case available (ELP-75-x-C)
- LED indicator for power on
- 1U low profile
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 60A at 230VAC
 DC adjustment range ±10% rated output voltage
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Leakage current Less than 1mA at 240VAC
 Setup, rise, hold up time 2500ms, 50ms, 20ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
ELP-75-3.3□	3.3V, 0~15A	±3%	80mV	80%
ELP-75-5□	5V, 0~15A	±2%	80mV	82%
ELP-75-12□	12V, 0~6.25A	±2%	120mV	89%
ELP-75-15□	15V, 0~5A	±2%	150mV	90%
ELP-75-24□	24V, 0~3.15A	±1%	240mV	90%
ELP-75-36□	36V, 0~2.1A	±1%	280mV	90%
ELP-75-48□	48V, 0~1.6A	±1%	300mV	90%

□= blank, -C ; blank: PCB type, -C: Enclosed type


100W Single Output with PFC Function

- 4"x 2" compact size
- Universal AC input / Full range
- Built-in active PFC function
- No load power consumption <0.5W**
- High efficiency up to 92.5%
- Free air convection for 75W and 100W with 20 CFM forced air



101.6x 50.8x 29 mm

- Protections:
Short circuit / Overload / Over voltage / Over temperature
- 12V/0.3A auxiliary output
- LED Indicator for power on
- 3 years warranty

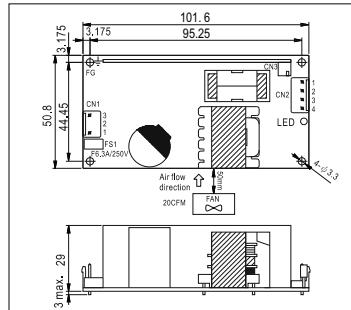

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range -2%~+5% rated output voltage
 Overload protection 105%~145% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
EPP-100-12	12V, 0~8.5A	±2%	120mV	91.0%
EPP-100-15	15V, 0~6.67A	±2%	150mV	91.0%
EPP-100-24	24V, 0~4.2A	±1%	240mV	92.0%
EPP-100-27	27V, 0~3.71A	±1%	240mV	92.5%
EPP-100-48	48V, 0~2.1A	±1%	300mV	92.5%

150W Single Output with PFC Function


- 4"x 2" compact size
- Universal AC input / Full range
- Built-in active PFC function
- No load power consumption <0.5W**
- High efficiency up to 93%
- Free air convection for 100W and 150W with 20 CFM forced air



NEW

101.6x 50.8x 29 mm

- Protections:
Short circuit / Overload / Over voltage / Over temperature
- 12V/0.3A auxiliary output
- High power density 16.42W/in³
- LED Indicator for power on
- 3 years warranty




AC input voltage range ... 90~264VAC; 127~370VDC
 DC adjustment range -2%~+5% rated output voltage
 Overload protection 105%~145% hiccup mode, auto-recovery
 Over voltage protection ... 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Connection 3+4P / 3.96mm pitch, JST B3P / B4P-VH

Model No.	Output	Tol.	R&N	Effi.
EPP-150-12	12V, 0~12.5A	±2%	130mV	91.5%
EPP-150-15	15V, 0~10.0A	±2%	150mV	92.0%
EPP-150-24	24V, 0~6.25A	±1%	240mV	93.0%
EPP-150-27	27V, 0~5.56A	±1%	240mV	92.0%
EPP-150-48	48V, 0~3.125A	±1%	300mV	92.0%

300W Single Output with PFC Function


- 5"x 3" compact size
- Universal AC input / Full range
- Built-in active PFC function
- No load power consumption <0.5W by PS-ON control**
- High efficiency up to 93%
- Free air convection for 200W and 300W with 20.5 CFM forced air
- Protections:
Short circuit / Overload / Over voltage / Over temperature



NEW

127x 76.2x 35 mm

- Withstand 300VAC surge input for 5 seconds
- 12V/0.5A auxiliary output
- Standby 5V@1A
- Built-in remote sense function
- High power density 14.5W/in³
- 3 years warranty



AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range ±5% rated output voltage
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
EPP-300-12	12V, 0~25.0A	±3%	120mV	90.0%
EPP-300-15	15V, 0~20.0A	±3%	120mV	90.0%
EPP-300-24	24V, 0~12.5A	±2%	150mV	92.5%
EPP-300-27	27V, 0~11.12A	±2%	200mV	93.0%
EPP-300-48	48V, 0~6.25A	±2%	250mV	93.0%

Charger


120W Battery Charger




PCB Type: 144x 90x 35 mm
External Case Type: 180x 96x 49 mm



P.C.B. Dimension

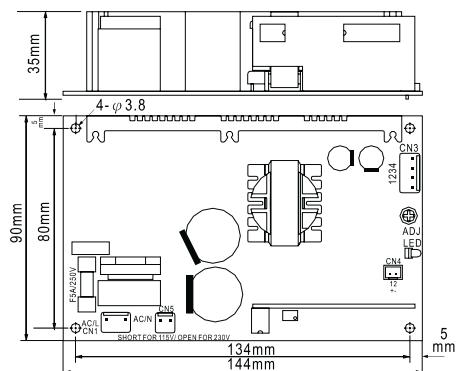

Case Drawing

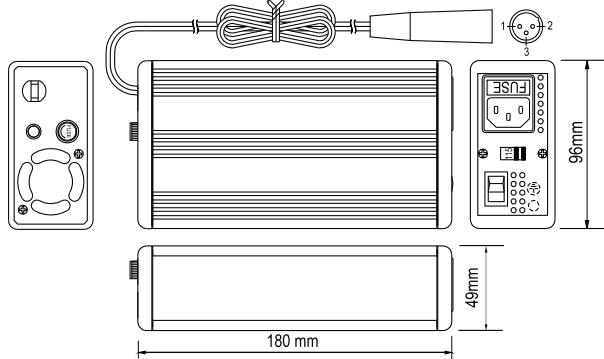

Features

- AC input range selectable by switch
- Passive PFC, PF> 0.65(option)
- Protection for deeply discharged battery
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Charger for lead-acid batteries
- Built-in ON/OFF power switch
- 3 poles AC inlet with fuse holder
- Charging type can be selected (option)
- 2 color LED loading indicator
- EN60335 approved
- Low cost, high reliability
- Open frame models available (without safety approval)
- 2 years warranty

General Specification

AC input voltage range88~132VAC/ 176~264VAC selectable by switch
AC inrush current (max.)Cold start, 25A at 115VAC, 50A at 230VAC
Overload protection90%~110% constant current limiting ,auto-recovery

Over voltage protection108%~127% rated output voltage

Setup, rise, hold up time1000ms, 50ms, 16ms at full load and 230VAC

Withstand voltageI/P-O/P: 3kVAC, I/P-FG: 1.5kVAC,

O/P-FG: 0.5kVAC, 1 minute

Working temperature-10~+45°C, derating curve may vary for different models

Safety standardsUL60950-1, TUV EN60950-1, EN60335, EN60335-1, EN60335-2-29(except for 55.2V) approved



EMC standardsEN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3

DC output cable 6 ft. of SPT-2, 18AWGx2C

Standard output connector ... MIC 3P, male type(standard type)

Packing1.1kg ; 16pcs / 17.9kg / 1.47CUFT (without PFC)
1.24kg ; 16pcs / 20.1kg / 1.47CUFT (with PFC)

Charging Curve

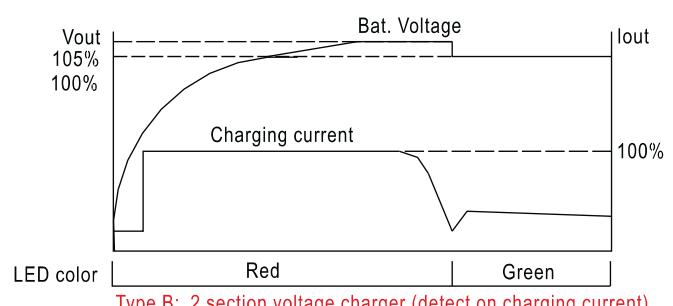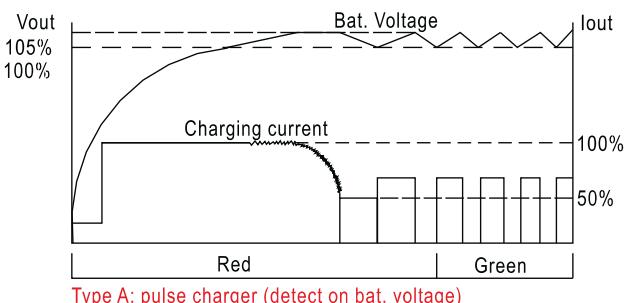

Order Information

P A - 120 P - 13 C

A: Pulse charge

B: 2 section voltage charge

P: With PFC

N: None PFC

P : Open P.C.B.
C : With case

13: 13.8V

27: 27.6V

54: 55.2V

Model No.	Output	Tol.	R&N	Effi.
P□-120□-13□	13.8V, 0~7.2A	±3~±8.5%	150mV	73%
P□-120□-27□	27.6V, 0~4.3A	±1~±8.0%	200mV	79%
P□-120□-54□	55.2V, 0~2.2A	±1~±7.5%	250mV	79%

108W Desktop Power Supply or Charger

CE



CASE: 909 150x 140x 75 mm

- AC input range selectable by switch
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 3 color LED loading indicator
- Battery under / over voltage and polarity protection (ESC only)
- Cooling by free air convection
- Fixed switching frequency at 25kHz
- 2 years warranty

AC input voltage range 88~132VAC / 176~264VAC selectable by switch
AC inrush current Cold start, 40A at 230VAC

DC adjustment range 13.5V: 12~15V, 27V: 24~30V, 54V: 48~56V

Overload protection 105%~135% fold back current limiting, auto-recovery

Over voltage protection 115%~135% rated output voltage

Setup, rise, hold up time ... 200ms, 100ms, 36ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards CSA 61010-1 approved

EMC standards EN55022 class B, EN61000-3-2,3
EN61000-4-2,3,4

Packing 1.38kg ; 8pcs / 12.0kg / 1.1CUFT

Model No.	Output	Tol.	R&N	Effi.
ESC-120-13.5	13.5V, 0~8A	±2%	120mV	81%
ESC-120-27	27V, 0~4A	±1%	150mV	83%
ESC-120-54	54V, 0~2A	±1%	400mV	84%

Model No.	Output	Tol.	R&N	Effi.
ESP-120-13.5	13.5V, 0~8A	±2%	120mV	81%
ESP-120-27	27V, 0~4A	±1%	150mV	83%
ESP-120-54	54V, 0~2A	±1%	400mV	84%

216W Desktop Power Supply or Charger

CE



CASE: 909 150x 140x 75 mm

- AC input range selectable by switch
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 3 color LED loading indicator
- Battery under / over voltage and polarity protection (ESC only)
- Built-in DC fan with fan ON/OFF auto control at 50°C
- Fixed switching frequency at 25kHz
- 2 years warranty

AC input voltage range 88~132VAC / 176~264VAC selectable by switch

AC inrush current Cold start, 40A at 230VAC

DC adjustment range 13.5V: 12~15V, 27V: 24~30V, 54V: 48~56V

Overload protection 105%~135% fold back current limiting, auto-recovery

Over voltage protection 115%~135% rated output voltage

Setup, rise, hold up time ... 200ms, 100ms, 30ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards CSA 61010-1 approved

EMC standards EN55022 class B, EN61000-3-2,3
EN61000-4-2,3,4

Packing 1.5 kg ; 8pcs / 13.0kg / 1.1CUFT

Model No.	Output	Tol.	R&N	Effi.
ESC-240-13.5	13.5V, 0~16A	±2%	120mV	81%
ESC-240-27	27V, 0~8A	±1%	150mV	84%
ESC-240-54	54V, 0~4A	±1%	400mV	85%

Model No.	Output	Tol.	R&N	Effi.
ESP-240-13.5	13.5V, 0~16A	±2%	120mV	81%
ESP-240-27	27V, 0~8A	±1%	150mV	84%
ESP-240-54	54V, 0~4A	±1%	400mV	85%

230W Single Output Battery Charger

CE
(PB-230-xxAD1)



190x 96x 49 mm

- 3 stage charging
- Universal AC input / Full range
- Built-in active PFC function
- Protections:
- Short circuit / Over voltage / Over temperature
- 2 color LED loading indicator
- Built-in remote ON-OFF control
- Fan ON/OFF control
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current (max.) .. Cold start, 50A at 230VAC

Over voltage protection 102%~125% shut off, re-power on to recover

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG:0.5kVAC

Working temperature -20~+50°C (refer to output derating curve)

Safety standards UL1012(PB-230xx-AD1 only), EN60950-1 approved

EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11,
EN61000-3-2,3

Packing 1.21Kg ; 12pcs / 15.5Kg / 1.29CUFT

Model No.	Output	Effi.
PB-230-12□	14.4V, 0~16A	81.5%
PB-230-24□	28.8V, 0~8A	85.5%
PB-230-48□	57.6V, 0~4A	86.0%

□= Blank, AD1; Blank= 4 pin power din, AD1= Anderson connector

300W Single Output Battery Charger

CB
(except for 48V) (P type only)



CASE: 801B 253x 135x 48.5 mm

- Optimal 3 stage charging characteristic
- AC input range selectable by switch
- Passive PFC compliance to EN61000-3-2 class A (option)
- Protections:
- Reverse polarity / Short circuit / Over voltage / Over temperature
- Charger for lead-acid batteries
- Built-in ON/OFF power switch
- 3 poles AC inlet (IEC 320-C14)
- 2 color LED loading indicator
- Built-in remote ON/OFF control
- Cooling by free air convection
- 3 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch

AC inrush current (max.) .. Cold start, 60A at 230VAC

Over voltage protection 108%~125% rated output voltage

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -10~+50°C (refer to output derating curve)

Safety standards IEC60335-2-29 CB approval by TUV
(except for 48V), UL60950-1 approved

EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11,
EN61000-3-2,3 (P type)

Packing 1.45kg ; 6pcs / 9.7kg / 0.95CUFT

Model No.	Output (20 min.) / (Continuous at 25°C)	Effi.
PB-300□-12	14.4V, 20.85A / 12.5A	85%
PB-300□-24	28.8V, 10.50A / 6.25A	86%
PB-300□-48	57.6V, 5.3A / 3.20A	88%

□ = P: with PFC; N: non PFC

Charger

360~1000W Battery Charger



360W Single Output Battery Charger



CB **CE**
(except for 48V) (P type only)



CASE: 801A 253x 135x 48.5 mm

- Optimal 3 stage charging characteristic
- AC input range selectable by switch
- Passive PFC compliance to EN61000-3-2 class A (option)
- Protections:
 - Reverse polarity / Short circuit / Over voltage / Over temperature
 - Charger for lead-acid batteries
 - Built-in ON/OFF power switch
 - 3 poles AC inlet (IEC 320-C14)
 - 2 color LED loading indicator
 - Built-in remote ON/OFF control
 - Cooling by built-in DC fan
 - 3 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch

AC inrush current (max.) .. Cold start, 60A at 230VAC

Over voltage protection 108%~125% rated output voltage

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -20°C~+60°C (refer to output derating curve)

Safety standards IEC60335-2-29 CB approval by TUV

(except for 48V), UL60950-1 approved

EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11,

EN61000-3-2,3 (P type)

Packing 1.5kg ; 6pcs / 10kg / 0.95CUFT

Model No.	Output	Effi.
PB-360□-12	14.4V, 24.3A	85%
PB-360□-24	28.8V, 12.5A	86%
PB-360□-48	57.6V, 6.25A	87%

□= P: with PFC; N: non PFC

600W Single Output Battery Charger



CASE: 805C 230x 158x 67 mm

- 2/3/8 stage smart charger for lead-acid batteries
- Microprocessor controlled power management
- Universal AC input / Full range
- Built-in active PFC function
- Protections:
 - Reverse polarity / Short circuit / Over voltage / Over temperature
 - Built-in temp. compensation function
 - Status signal sent by relay contacts
 - 3 color LED loading indicator
 - Built-in remote ON-OFF control
 - Fan speed control (depend on charging current)
 - Charging curve can be modified for different battery applications (optional)
 - 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current (max.) .. Cold start, 50A at 230VAC

Over voltage protection 112%~125% shut off, re-power on to recover

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC

Working temperature -20°C~+60°C (refer to output derating curve)

Safety standards TUV EN60335-1, EN60335-2-29(except for 48V), EN60950-1(48V only), UL1012 approved

EMC standards EN55022 class B conducted, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Connection IEC inlet for input; copper pillars for output

Model No.	Output	Effi.
PB-600-12	14.4V, 0~40.0A	86%
PB-600-24	28.8V, 0~21.0A	87%
PB-600-48	57.6V, 0~10.5A	89%

1000W Single Output Battery Charger



CB **CE**



CASE: 804B 300x 184x 70 mm

- 2/3/8 stage smart charger for lead-acid batteries
- Microprocessor controlled power management
- Universal AC input / Full range
- Built-in active PFC function
- Protections:
 - Reverse polarity / Short circuit / Over voltage / Over temperature
 - Built-in temp. compensation function
 - Can be connected to 2 battery banks
 - Status signal sent by relay contacts
 - 3 color LED loading indicator
 - Built-in remote ON/OFF control
 - Fan speed control
- Charging curve can be modified for different battery applications (optional)
- 3 years warranty

AC input voltage range 90~264VAC ; 127~370VDC

AC inrush current (max.) Cold start, 50A at 230VAC

Over voltage protection 110%~125% shut off, re-power on to recover

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -20°C~+60°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B conducted,

EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3


Connection IEC inlet for input; copper pillars for output

Packing 3.5kg ; 4pcs / 15kg / 1.83CUFT


Model No.	Output	Effi.
PB-1000-12	14.4V, 60.0A	85%
PB-1000-24	28.8V, 34.7A	88%
PB-1000-48	57.6V, 17.4A	89%

Built-in Charging Curves for PB-600 and PB-1000


2-Stage Charging Curve

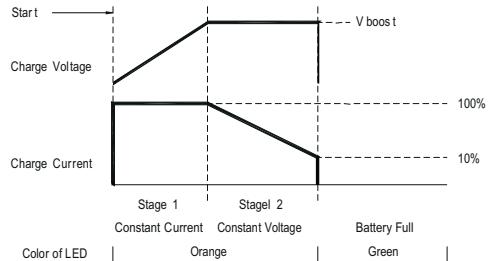

3-Stage Charging Curve

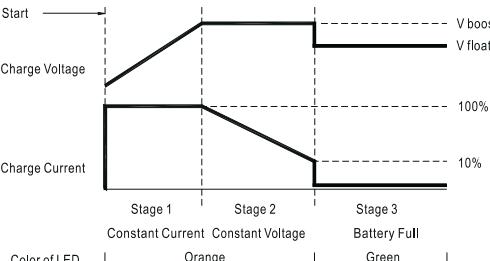

8-Stage Charging Curve

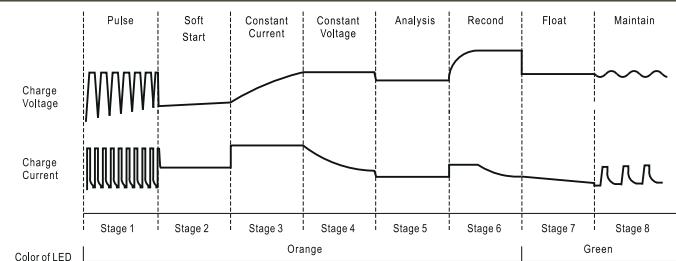

Green Charger 30~326W Portable Battery Charger



30W Green Adaptor with Charging Function

- Universal AC input/ Full range
- Class II power (without earth pin)
- No load power consumption < 1W**
- Constant current and voltage (CC, CV mode)
- High reliability
- Suitable for high surge current equipment
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 2 color LED indicator for charging status
- Fully enclosed plastic case
- 2 years warranty



AC input voltage range 90~264VAC; 127~370VDC
 Overload protection 90%~110% constant current mode and over 300% pulsing mode
 Over voltage protection 110%~135% rated output voltage, clamp by Zener diode
 Withstand voltage I/P-O/P: 4242VDC, 1minute
 Working temperature 0~+50°C (refer to output derating curve)
 Safety standards UL60950-1, CSA 22.2, TUV EN60950-1
 EMC standards EN55014-1, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11
 Length of output cable 180cm of UL1185, 18AWG
 Standard DC plug P1J: 2.1øx5.5øx11mm / C+, tuning fork type

Model No.	Output	R&N	Effi.
GC30□-0P1J	4.2V, 0~4.00A	50mV	55%
GC30□-1P1J	5.6V, 0~3.99A	50mV	70%
GC30□-11P1J	7.2V, 0~3.00A	80mV	74%
GC30□-2P1J	8.4V, 0~3.00A	80mV	76%
GC30□-4P1J	14.3V, 0~2.09A	100mV	78%
GC30□-5P1J	16.8V, 0~1.60A	100mV	78%
GC30□-6P1J	28.6V, 0~1.04A	150mV	80%

□= B, U, E; B: IEC320-C8, U: US type plug, E: European type plug

120W Green Adaptor with Charging Function



AC input voltage range 85~264VAC; 120~370VDC
 Overload protection 90~110% constant current, auto-recovery
 Over voltage protection 105%~135% shut down O/P voltage, re-power on to recover
 Withstand voltage I/P-O/P: 3kVAC
 Working temperature -30~+70°C (refer to derating curve)
 Safety standards UL1012(GC120Axx-AD1 only), EN60950-1 approved
 EMC standards EN55022 class B, FCC part 15 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Length of output cable 120cm of UL2464, 18AWGx 4C
 Standard DC plug Power DIN 4P with lock type (R7B)

Model No.	Output	Effi.
GC120A12-□	13.6V, 7.5A	86.5%
GC120A24-□	27.2V, 4.42A	90.0%
GC120A48-□	54.4V, 2.21A	91.0%

□= R7B, AD1 ; R7B= 4 pin power din, AD1= Anderson connector

160W Green Adaptor with Charging Function



- Universal AC input/ Full range
- Built-in active PFC function
- No load power consumption < 1W**
- High efficiency up to 94%
- 2 stage charging characteristic
- Cooling by free air convection
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- 2 color LED indicator for charging status
- 2 years warranty

AC input voltage range 85~264VAC; 120~370VDC
 Overload protection 90%~110% constant current, auto-recovery
 Over voltage protection 105%~135% rated output voltage, re-power on to recover
 Withstand voltage I/P-O/P: 3kVAC
 Working temperature -30~+70°C (refer to derating curve)
 Safety standards UL1012(GC160Axx-AD1 only), EN60950-1 approved
 EMC standards EN55022 class B, FCC part 15 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Length of output cable 120cm of UL2464, 18AWGx 4C
 Standard DC plug Power DIN 4P with lock type (R7B)

Model No.	Output	Effi.
GC160A12-□	13.6V, 10.0A	89.0%
GC160A24-□	27.2V, 5.89A	92.5%
GC160A48-□	54.4V, 2.95A	94.0%

□= R7B, AD1 ; R7B= 4 pin power din, AD1= Anderson connector

218W & 326W Green Adaptor with Charging Function



- Universal AC input/ Full range
- Built-in active PFC function
- No load power consumption < 1W**
- High efficiency up to 93%
- 2 stage charging characteristic
- Cooling by free air convection
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- 2 color LED indicator for charging status
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 Overload protection 90%~110% constant current, auto-recovery
 Over voltage protection 105%~135% rated output voltage, re-power on to recover
 Withstand voltage I/P-O/P: 3kVAC
 Working temperature -30~+60°C (refer to output derating curve)
 Safety standards GC220: TUV EN60950-1, UL1012 (GC220Axx-AD1 only) approved
 GC330: Design refer to UL60950-1, TUV EN60950-1
 EMC standards EN55022 class B, FCC part 15 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Length of output cable 100cm of UL2464, 16AWGx 4C
 Standard DC plug Power DIN 4P with lock type (R7B)

♦ GC220 Series

Model No.	Output	Effi.
GC220A12-□	13.6V, 13.5A	89.0%
GC220A24-□	27.2V, 8A	92.5%
GC220A48-□	54.4V, 4A	93.0%

□= R7B, AD1 ; R7B= 4 pin power din, AD1= Anderson connector

♦ GC330 Series Under Development

Model No.	Output	Effi.
GC330A36-R7B	40.8V, 8A	92.0%
GC330A48-R7B	54.4V, 6A	93.0%

Green Adaptor 12~24W Single Output and Interchangeable Type



■ Features

- Interchangeable AC plugs (plug kit sold separately)
- Universal AC input / Full range
- No load power consumption <0.3W
- ErP step 2 compliant
- Meet EISA 2007 (Energy Independence and Security Act)
- Class II power (without earth pin)
- Protections: Short circuit / Over voltage / Overload
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS
- Approvals:
UL / CUL / TUV / CCC / CB / FCC / CE / C-Tick
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



AC input voltage range	90~264VAC / 0.4A for GE12; 90~264VAC / 0.7A for GE18/24
AC inrush current (max.)	Cold start, 40A at 100VAC; 80A at 230VAC
Overload protection	Hiccup mode, auto-recovery
Over voltage protection	115%~135% rated output voltage
Setup, rise, hold up time	4000ms, 100ms, 30ms at 230VAC input
Withstand voltage	I/P-O/P:4242VDC, 1 minute
Working temperature	-10~+50°C (refer to output derating curve)
Safety standards	UL60950-1, CSA22.2, EN60950-1, GB4943 approved
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part15 class B, GB9254
Length of output cable	150cm of UL2468, 20AWG for GE12; 150cm of UL2468, 18AWG for GE18/24
Standard DC plug	P1J: 2.1øx5.5øx11mm / C+, tuning fork type (refer to page 57 for DC plug list)

■ Wall-mounted (Interchangeable Type)—12W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE12I05-P1J	5V, 0~2.00A	±5%	50mV	74%
GE12I07-P1J	7.5V, 0~1.33A	±5%	75mV	77%
GE12I09-P1J	9V, 0~1.33A	±5%	100mV	79%
GE12I12-P1J	12V, 0~1.00A	±3%	120mV	81%
GE12I15-P1J	15V, 0~0.80A	±3%	150mV	82%
GE12I18-P1J	18V, 0~0.83A	±3%	180mV	83%
GE12I24-P1J	24V, 0~0.625A	±3%	240mV	83%

■ Wall-mounted (Interchangeable Type)—24W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE24I05-P1J	5V, 0~3.00A	±5%	50mV	76.5%
GE24I07-P1J	7.5V, 0~2.00A	±5%	75mV	79.5%
GE24I09-P1J	9V, 0~2.22A	±5%	100mV	81.5%
GE24I12-P1J	12V, 0~2.00A	±3%	120mV	82.5%
GE24I15-P1J	15V, 0~1.60A	±3%	150mV	84.0%
GE24I18-P1J	18V, 0~1.33A	±3%	180mV	84.0%
GE24I24-P1J	24V, 0~1.00A	±3%	240mV	85.0%
GE24I48-P1J	48V, 0~0.50A	±3%	300mV	85.0%

■ Wall-mounted (Interchangeable Type)—18W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE18I05-P1J	5V, 0~2.40A	±5%	50mV	75%
GE18I07-P1J	7.5V, 0~1.73A	±5%	75mV	79%
GE18I09-P1J	9V, 0~2.00A	±5%	100mV	81%
GE18I12-P1J	12V, 0~1.50A	±3%	120mV	82%
GE18I15-P1J	15V, 0~1.20A	±3%	150mV	84%
GE18I18-P1J	18V, 0~1.00A	±3%	180mV	84%
GE18I24-P1J	24V, 0~0.75A	±3%	240mV	85%
GE18I48-P1J	48V, 0~0.375A	±3%	300mV	85%

► Interchangeable AC Inlet Plug

AC Plug Type	Australian Type	U.K. Type
AC Plug Order No.	AC Plug-AU	AC Plug-UK
AC Plug Type	European Type	U.S. Type
AC Plug Order No.	AC Plug-EU	AC Plug-US

Note: Main body unit and AC plug should be ordered separately; The main body needs to be used along with any of the AC plug.

Green Adaptor

5~15W Single Output



6W Green Power Adaptor

- Universal AC input/ Full range
- No load power consumption < 0.3W
- ErP step 2 compliant**
- Meet EISA 2007 (Energy Independence and Security Act)
- 2 pole US / European type plug
- Class II power (without earth pin)



GS06U
32x 66x 42.5 mm

- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Fully enclosed plastic case
- Approvals:
- UL/CUL/CB/FCC/CE for GS06U
- TUV/CB/FCC/CE for GS06E
- 2 years warranty



GS06E
32x 66x 42.5 mm

AC input voltage range 90~264VAC ; 127~370VDC
 AC inrush current(max.) .. Cold start, 50A at 230VAC
 Overload protection Hiccup mode, auto-recovery
 Over voltage protection ... Clamp by zener diode > 120%
 Withstand voltage I/P-O/P: 4242VDC, 1minute
 Working temperature 0~+50°C (refer to output derating curve)
 Safety standards UL60950-1, CSA 22.2, TUV EN60950-1
 EMC standards EN55022,EN61000-3-2,EN61000-4-2,3,4,5,6,11,FCC part15 class B
 Length of output cable 180cm of UL1185, 20AWG

Order No.	Output	Tol.	R&N	Effi.
GS06□ -1P1J	5V, 0~1.00A	±5%	50mV	68%
GS06□ -11P1J	7.5V, 0~0.80A	±5%	80mV	74%
GS06□ -2P1J	9V, 0~0.66A	±5%	80mV	75%
GS06□ -3P1J	12V, 0~0.50A	±3%	100mV	77%
GS06□ -4P1J	15V, 0~0.40A	±3%	120mV	78%
GS06□ -5P1J	18V, 0~0.33A	±3%	150mV	78%
GS06□ -6P1J	24V, 0~0.25A	±2%	180mV	82%
GS06□ -8P1J	48V, 0~0.125A	±2%	200mV	84%

□ = U: American 2P ; E: European 2P

12W Green Power Adaptor

- Universal AC input/ Full range
- No load power consumption < 0.3W
- ErP step 2 compliant**
- Meet EISA 2007 (Energy Independence and Safety Act)
- 2 pole US / European type plug
- Class II power (without earth pin)



GS12U
65x 47x 26.5 mm

- Protections: Short circuit / Overload / Over voltage / Over temp.
- Pass LPS
- Fully enclosed plastic case
- Approvals:
- UL/CUL/BSMI/CB/FCC for GS12U
- TUV/CB/CE for GS12E
- 2 years warranty



GS12E
65x 47x 26.5 mm

AC input voltage range 90~264VAC ; 127~370VDC
 AC inrush current(max.) .. Cold start, 45A at 230VAC
 Overload protection Hiccup mode, auto-recovery
 Over voltage protection ... 115%~135% clamp by zener diode
 Withstand voltage I/P-O/P: 3kVAC, 1minute
 Working temperature 0~+50°C (refer to output derating curve)
 Safety standards UL60950-1, CSA 22.2, BSMI CNS14336, TUV EN60950-1
 EMC standards EN55022, EN61204-3, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part15 class B

Order No.	Output	Tol.	R&N	Effi.
GS12□ 05-P1J	5V, 0~2.00A	±5%	75mV	76.0%
GS12□ 07-P1J	7.5V, 0~1.60A	±4%	90mV	78.5%
GS12□ 09-P1J	9V, 0~1.33A	±4%	90mV	78.5%
GS12□ 12-P1J	12V, 0~1.00A	±3%	120mV	78.5%
GS12□ 15-P1J	15V, 0~0.80A	±3%	150mV	80.0%
GS12□ 18-P1J	18V, 0~0.67A	±3%	180mV	80.0%
GS12□ 24-P1J	24V, 0~0.50A	±3%	200mV	80.5%

□ = U: American 2P ; E: European 2P

5W Green USB Adaptor



GS05U-USB
41.86x 32.76x 23.8 mm



GS05E-USB
41.54x 30.5x 20 mm

NEW

- Universal AC input / Full range
- No load power consumption < 0.3W
- GS05U-USB: Meet EISA 2007(Energy Independence and Security Act)**
- GS05E-USB: ErP step 2 compliant**

- Compact size
- 2 pole US / European type plug
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Pass LPS
- Fully enclosed plastic case
- 2 years warranty

AC input voltage range 90~264VAC ; 127~370VDC
 Overload protection 105%~135% rated output power, hiccup mode, auto-recovery

Over voltage protection 105%~200% rated output voltage, hiccup mode, auto-recovery

Withstand voltage I/P-O/P: 4242VDC, 1 minute

Working temperature -20~+50°C (refer to output derating curve)

Safety standards U Type: UL60950-1, CSA22.2 approved

E Type: TUV EN60950-1 approved

EMC standards FCC part15 class B(U Type); EN55022 class B(E Type)

Standard DC plug USB Type A

Order No.	Output	Tol.	R&N	Effi.
GS05U-USB	5V, 0~1A	±4%	90mV	69%
GS05E-USB	5V, 0~1A	±4%	80mV	71%

15W Green Power Adaptor

- Universal AC input/ Full range
- No load power consumption < 0.3W
- ErP step 2 compliant**
- Meet EISA 2007 (Energy Independence and Security Act)
- Pass LPS

- Protections:
- Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Approvals:
- UL/CUL/TUV/CB/FCC/CE for GS15A/B
- TUV/CB/FCC/CE for GS15E
- UL/CUL/CB/FCC/CE for GS15U
- 2 years warranty



GS15A 100x 58.5x 32.8 mm



GS15B 100x 58.5x 32.8 mm



GS15U 34x 71x 50 mm



GS15E 34x 71x 50 mm

AC input voltage range 90~264VAC ; 127~370VDC

AC inrush current(max.) Cold start, 50A at 230VAC

Overload protection Hiccup mode, auto-recovery

Over voltage protection Clamp by zener diode > 120%

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature 0~+50°C (refer to output derating curve)

Safety standards UL60950-1, CSA 22.2, TUV EN60950-1 approved

EMC standards EN55022-B, EN61000-3-2,3,

EN61000-4-2,3,4,5,6,11,FCC part 15 class B

Length of output cable 180cm of UL1185, 18AWG

Standard DC plug P1J: 2.1øx5.5øx11mm / C+, tuning fork type

(refer to page 55 for DC plug list)

Order No.	Output	Tol.	R&N	Effi.
GS15□ -1P1J	5.0V, 0~2.40A	±5%	50mV	75%
GS15□ -11P1J	7.5V, 0~1.60A	±5%	80mV	78%
GS15□ -2P1J	9.0V, 0~1.66A	±5%	80mV	80%
GS15□ -3P1J	12V, 0~1.25A	±3%	80mV	80%
GS15□ -4P1J	15V, 0~1.00A	±3%	100mV	80%
GS15□ -5P1J	18V, 0~0.83A	±3%	120mV	81%
GS15□ -6P1J	24V, 0~0.62A	±2%	150mV	83%
GS15□ -8P1J	48V, 0~0.31A	±2%	240mV	85%

□ = A:IEC320-C14 ; B: IEC320-C8

E: European 2P ; U: American 2P

Green Adaptor

18~36W Single Output



GS18/25A



GS18/25B



GS18/25/36U



GS18/25/36E

Features

- Universal AC input / Full range
- No load power consumption < 0.3W
- ErP step 2 compliant
- Meet EISA 2007 (Energy Independence and Security Act)
- NRCan compliant for A/U type
- 2 pole USA / EURO plug or IEC320-C14/C8
- Class II power (without earth pin) for B/E/U type
- Class I power (with earth pin) only for A type
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- LED indicator for power on (except for GS36)
- Pass LPS
- Approvals:
A type: UL / CUL / TUV / BSMI / CCC / PSE / CB / FCC / CE
B type: UL / CUL / TUV / BSMI / CCC / CB / FCC / CE
U type: UL / CUL / BSMI / CB / FCC
E type: TUV / CB / CE
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Order No.	GS18	GS25	GS36 NEW
AC input voltage range	90~264VAC / 0.5A	90~264VAC / 0.7A	90~264VAC / 0.9A
AC inrush current (max.)	Cold start, 45A at 230VAC		
Overload protection	105%~150% rated output voltage, hiccup mode, auto-recovery		110%~250% rated output voltage, hiccup mode, auto-recovery
Over voltage protection	105%~135% rated output voltage, clamp by zener diode		
Withstand voltage	I/P - O/P: 4242VDC, 1 minute		
Working temperature	0~+50°C (refer to output derating curve)		-30~+50°C (refer to output derating curve)
Safety standards	A type: UL60950-1, CSA 22.2, TUV EN60950-1, BSMI CNS14336, PSE J60950-1(GS18A/GS25A-5V~28V only) , CCC GB4943 approved B type: UL60950-1, CSA 22.2, TUV EN60950-1, BSMI CNS14336, CCC GB4943 approved U type: UL60950, CSA22.2, BSMI CNS14336 approved E type: TUV EN60950-1 approved		
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11(A/B/E type), FCC part 15 class B(A/B/U type), GB9254(A/B type)		
Length of output cable	120cm of 16AWG for 5~12V ; 180cm of UL1185, 18AWG for 15~48V		100cm of UL1185, 16AWG for 5~12V ; 100cm of UL1185, 18AWG for 24~48V
Standard DC plug	P1J: 2.1øx5.5øx11mm / C+, tuning fork type (refer to page 57 for DC plug list)		

Desktop / Wall-mounted — 18W



Order No.	Output	Tol.	R&N	Effi.	Order No.	Output	Tol.	R&N	Effi.
GS18□05-P1J	5V, 0~3.00A	±5%	50mV	79.5%	GS18□24-P1J	24V, 0~0.75A	±2%	180mV	86.0%
GS18□07-P1J	7.5V, 0~2.00A	±5%	80mV	82.0%	GS18□28-P1J	28V, 0~0.64A	±2%	240mV	86.5%
GS18□09-P1J	9V, 0~2.00A	±5%	80mV	83.0%	GS18□48-P1J	48V, 0~0.375A	±2%	240mV	87.0%
GS18□12-P1J	12V, 0~1.50A	±3%	80mV	85.0%	□=A / B / U / E Class I — A: IEC320-C14 Class II — B: IEC320-C8, U: US type plug, E: European type plug				
GS18□15-P1J	15V, 0~1.20A	±3%	100mV	85.0%					
GS18□18-P1J	18V, 0~1.00A	±3%	150mV	85.0%					

Desktop / Wall-mounted — 25W



Order No.	Output	Tol.	R&N	Effi.	Order No.	Output	Tol.	R&N	Effi.
GS25□05-P1J	5V, 0~4.00A	±5%	50mV	78.5%	GS25□24-P1J	24V, 0~1.04A	±2%	180mV	85.5%
GS25□07-P1J	7.5V, 0~2.93A	±5%	80mV	81.5%	GS25□28-P1J	28V, 0~0.89A	±2%	240mV	85.5%
GS25□09-P1J	9V, 0~2.77A	±5%	80mV	82.5%	GS25□48-P1J	48V, 0~0.52A	±2%	240mV	87.0%
GS25□12-P1J	12V, 0~2.08A	±3%	80mV	84.5%	□=A / B / U / E Class I — A: IEC320-C14 Class II — B: IEC320-C8, U: US type plug, E: European type plug				
GS25□15-P1J	15V, 0~1.66A	±3%	100mV	84.5%					
GS25□18-P1J	18V, 0~1.38A	±3%	150mV	84.5%					

Wall-mounted — 36W **NEW**



Order No.	Output	Tol.	R&N	Effi.	Order No.	Output	Tol.	R&N	Effi.
GS36□05-P1J	5V, 0~4.50A	±5%	50mV	77.0%	GS36□24-P1J	24V, 0~1.50A	±2%	180mV	86.0%
GS36□09-P1J	9V, 0~3.50A	±5%	80mV	81.5%	GS36□48-P1J	48V, 0~0.75A	±2%	240mV	87.5%
GS36□12-P1J	12V, 0~3.00A	±3%	100mV	84.5%	□=U / E U: US type plug, E: European type plug				

Green Adaptor

40~120W Single Output



Features

- Universal AC input / Full range
- No load power consumption <0.3W for GS40/60; <0.5W for GS90/120
- ErP step 2 compliant
- Meet EISA 2007 (Energy Independence and Security Act) for full series
- NRCan compliant
- Built-in active PFC function for GS90/120
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Over voltage / Overload / Over temp. (except for GS40)
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS (except for GS120)
- 2 years warranty



General Specification

Order No.	GS40	GS60	GS90	GS120
AC input voltage range	90~264VAC / 1.0A	90~264VAC / 1.4A	90~264VAC / 2.0A	85~264VAC / 1.4A
AC inrush current (max.)	Cold start, 65A at 230VAC		Cold start, 70A at 230VAC	
Overload protection	Range	105%~150% rated output power	110%~150%	105%~160%
	Type	Hiccup mode, auto-recovery		
Over voltage protection		105%~135% rated output voltage		
Setup, rise, hold up time		1000ms, 30ms, 50ms at 230VAC input	1000ms, 20ms, 20ms at 230VAC input	2000ms, 30ms, 20ms at 230VAC input
Withstand voltage		I/P-O/P:3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC		I/P-FG: 3kVAC
Working temperature	-30~+60°C	-30~+50°C		-30~+70°C
Safety standards	UL60950-1, TUV EN60950-1, BSMI CNS14336, CCC GB4943, PSE J60950-1(except for 48V) approved			
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, CNS13438, GB9254, FCC part15 class B			
Length of output cable	GS40: 100cm of UL1185, 16AWG for 5~15V; 180cm of UL1185, 18AWG for 18~48V GS60: 100cm of UL2464, 16AWG for 5~9V; 100cm of UL1185, 16AWG for 12~15V; 180cm of UL1185, 18AWG for 18~48V		100cm of UL1185, 14AWG for 12~15V; 120cm of UL1185, 16AWG for 19~48V	120cm of UL2464, 18AWGx4C
Standard DC plug (refer to page 57 for DC plug list)	P1J: 2.1øx5.5øx11mm / C+, tuning fork type		P1M: 2.5øx5.5øx11mm / C+, tuning fork type	R7B: Power DIN 4P with lock type P1M: 2.5øx5.5øx11mm/C+, tuning fork type (20~48V only)

Desktop (IEC 320-C14 / Class I) — 40W

Order No.	Output	Tol.	R&N	Effi.
GS40A05-P1J	5V, 0~5.00A	±5%	100mV	80.5%
GS40A07-P1J	7.5V, 0~5.34A	±5%	100mV	85.5%
GS40A09-P1J	9V, 0~4.45A	±5%	100mV	85.0%
GS40A12-P1J	12V, 0~3.34A	±3%	100mV	89.0%
GS40A15-P1J	15V, 0~2.67A	±3%	100mV	89.5%
GS40A18-P1J	18V, 0~2.22A	±3%	150mV	90.0%
GS40A24-P1J	24V, 0~1.67A	±2.5%	180mV	91.0%
GS40A48-P1J	48V, 0~0.84A	±2.5%	240mV	92.0%

Desktop (IEC 320-C14 / Class I) — 90W

Order No.	Output	Tol.	R&N	Effi.
GS90A12-P1M	12V, 0~6.67A	±5%	80mV	88.0%
GS90A15-P1M	15V, 0~6.00A	±5%	100mV	89.0%
GS90A19-P1M	19V, 0~4.74A	±4%	150mV	89.0%
GS90A24-P1M	24V, 0~3.75A	±3%	180mV	89.5%
GS90A48-P1M	48V, 0~1.87A	±2%	240mV	91.0%

Desktop (IEC 320-C14 / Class I) — 60W

Order No.	Output	Tol.	R&N	Effi.
GS60A05-P1J	5V, 0~6.00A	±5%	100mV	81.0%
GS60A07-P1J	7.5V, 0~6.00A	±5%	100mV	85.5%
GS60A09-P1J	9V, 0~6.00A	±5%	100mV	87.5%
GS60A12-P1J	12V, 0~5.00A	±3%	100mV	88.0%
GS60A15-P1J	15V, 0~4.00A	±3%	100mV	88.5%
GS60A18-P1J	18V, 0~3.33A	±3%	150mV	88.5%
GS60A24-P1J	24V, 0~2.50A	±3%	180mV	90.0%
GS60A48-P1J	48V, 0~1.25A	±2.5%	240mV	92.0%

Desktop (IEC 320-C14 / Class I) — 120W

Order No.	Output	Tol.	R&N	Effi.
GS120A12-R7B	12V, 0~8.5A	±5%	80mV	87.5%
GS120A15-R7B	15V, 0~7.0A	±5%	120mV	89.0%
GS120A20-□	20V, 0~6.0A	±5%	150mV	89.0%
GS120A24-□	24V, 0~5.0A	±3%	180mV	90.0%
GS120A48-□	48V, 0~2.5A	±2%	240mV	91.0%
□	= P1M, R7B			



Features

- Universal AC input / Full range
- No load power consumption <0.5W
- ErP step 2 compliant
- Meet EISA 2007 (Energy Independence and Security Act)
- NRCan compliant
- Built-in active PFC function
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Fanless design
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fully enclosed plastic case
- LED indicator for power on
- 2 years warranty

General Specification

		GS160	GS220	GS280 Under Development		
AC input voltage range		85~264VAC ; 120~370VDC		90~264VAC ; 127~370VDC		
AC inrush current (max.)		Cold start, 120A at 230VAC				
Overload protection	Range	105%~135% rated output power				
	Type	Hiccup mode, auto-recovery				
Over voltage protection	Range	105%~135% rated output power				
	Type	Shut down o/p voltage, re-power on to recover				
Hold up time	20ms at full load			16ms at full load		
Withstand voltage	I/P-O/P: 3kVAC, 1 minute					
Working temperature	-30~+70°C		-30~+60°C (refer to output derating curve)			
Safety standards	UL60950-1, TUV EN60950-1, BSMI CNS14336, CCC GB4943, PSE J60950-1(except for 48V) approved (GS280 pending)					
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC PART 15 class B, CNS13438 class B, GB9254					
Length of output cable	120cm of UL2464, 18AWGx4C		100cm of UL2464, 16AWGx4C			
Standard DC plug (refer to page 57 for DC plug list)	Power DIN 4P with lock type (R7B)					

Desktop (IEC320-C14/Class I) — 160W

Order No.	Output	Tol.	R&N	Effi.
GS160A12-R7B	12V, 0~11.5A	±5%	80mV	89.0%
GS160A15-R7B	15V, 0~9.6A	±5%	100mV	90.0%
GS160A20-R7B	20V, 0~8.0A	±4%	150mV	92.0%
GS160A24-R7B	24V, 0~6.67A	±3%	180mV	92.5%
GS160A48-R7B	48V, 0~3.34A	±3%	240mV	94.0%

Desktop (IEC320-C14/Class I) — 280W

Order No.	Output	Tol.	R&N	Effi.
GS280A12-R7B	12V, 0~18.5A	±5%	80mV	90%
GS280A15-R7B	15V, 0~16A	±5%	100mV	90%
GS280A20-R7B	20V, 0~13A	±4%	150mV	92%
GS280A24-R7B	24V, 0~11.67A	±3%	180mV	94%
GS280A48-R7B	48V, 0~5.84A	±2%	240mV	94%

Desktop (IEC320-C14/Class I) — 220W

Order No.	Output	Tol.	R&N	Effi.
GS220A12-R7B	12V, 0~15.0A	±5%	80mV	90.0%
GS220A15-R7B	15V, 0~13.4A	±5%	100mV	90.0%
GS220A20-R7B	20V, 0~11.0A	±4%	150mV	92.0%
GS220A24-R7B	24V, 0~9.20A	±3%	180mV	93.5%
GS220A48-R7B	48V, 0~4.60A	±2%	240mV	94.5%



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

General Adaptor

25~50W Single Output



25W AC-DC Triple Output

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- Fixed switching frequency and regulation
- Topology: Top switch circuit
- LED indicator for power on
- 1 year warranty



P25A
108x 67x 36 mm



P25B
108x 67x 36 mm

AC input voltage range 90~264VAC / 0.8A

AC inrush current(max.) Cold start, <60A peak at 230VAC

Overload protection Hiccup mode, auto-recovery

Over voltage protection 110%~140% of +5V output

Setup, rise, hold up time ... 200ms, 50ms, 16ms at full load

Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC , 1 minute

Working temperature 0~+40°C (refer to output derating curve)

Safety standards UL1950, CSA 22.2, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,11

Standard output cable 150cm of UL2464

Length of output cable R1B: DIN 5P

♦ 25W — Triple output (IEC 320-C14 / Class I)

Order No.	Output	Tol.	R&N	Effi.	Max.
P25A13D-R1B	5V, 0.5~2.5A	±5%	50mV	72%	25W
	12V, 0.1~0.8A	±5%	100mV		
	-12V, 0.1~0.3A	±3%	100mV		
P25A14E-R1B	5V, 0.5~2.5A	±5%	50mV	74%	25W
	15V, 0.1~0.5A	±5%	100mV		
	-15V, 0.1~0.3A	±3%	100mV		

♦ 25W — Triple output (IEC 320-C8 / Class II)

Order No.	Output	Tol.	R&N	Effi.	Max.
P25B13D-R1B	5V, 0.5~2.5A	±5%	50mV	72%	25W
	12V, 0.1~0.8A	±5%	100mV		
	-12V, 0.1~0.3A	±3%	100mV		
P25B14E-R1B	5V, 0.5~2.5A	±5%	50mV	74%	25W
	15V, 0.1~0.5A	±5%	100mV		
	-15V, 0.1~0.3A	±3%	100mV		



We provide specification, drawing, test report and more information, please visit our website — <http://www.meanwell.com>



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.

50W AC-DC Triple Output



CB CE



147x 76x 43 mm

- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- LED indicator for power on
- 1 year warranty

AC input voltage range 90~264VAC / 1.6A

AC inrush current(max.) Cold start, <40A at 230VAC

Overload protection Hiccup mode, auto-recovery

Over voltage protection 110%~140% for +5V output

Hold up time 12ms at full load

Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute

Working temperature 0~+40°C (refer to output derating curve)

Safety standards UL1950, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,11

Length of output cable 120cm of UL2464

Standard DC plug R1B: DIN 5P

Order No.	Output	Tol.	R&N	Effi.	Max.
P50A13D-R1B	5V, 0.5~4.0A	±6%	50mV	72%	50W
	12V, 0.5~2.0A	±10%	100mV		
	-12V, 0.1~0.5A	±12%	100mV		
P50A14E-R1B	5V, 0.5~4.0A	±6%	50mV	74%	50W
	15V, 0.5~1.5A	±10%	100mV		
	-15V, 0.1~0.5A	±12%	100mV		

Optional DC Plug List

Type	A OD	B ID	C L
P1I	5.5	2.1	9.5
P1J	5.5	2.1	11.0
P1L	5.5	2.5	9.5
P1M	5.5	2.5	11.0
Type	A OD	B ID	C L
P2I	5.5	2.1	9.5
P2J	5.5	2.1	11.0
P2L	5.5	2.5	9.5
P2M	5.5	2.5	11.0
Type	Pin Assignment		
R1B	Single	Triple	
	1	COM	COM
	2	COM	COM
	3	Vout	+5V
	4	COM	-Vout
	5	Vout	+Vout
Type	Pin Assignment		
R7B	PIN No.	Output	
	1	+Vout	
	2	GND	
	3	GND	
4	+Vout		

► Minimum order quantity is varied for different models.

Medical Adaptor

30~50W Single Output



	MES30A		MES30B		MES30C		MES50A
108x 67x 36 mm	147x 75.5x 43.2 mm						

■ Features

- Universal AC input / Full range
- Medical safety approved (MOPP level)
- Class I (with earth pin) for MES30A/30C/50A
Class II (without earth pin) for MES30B
- Protections: Short circuit / Over voltage / Overload / Over temperature
- Low leakage current $\leq 230\mu\text{A}$ ($\leq 300\mu\text{A}$ for MES30)
- Fully enclosed plastic case
- Fixed switching frequency and regulation
- Topology: Top switch circuit
- LED indicator for power on
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Order No.	MES30A	MES30B	MES30C	MES50A
AC input voltage range	90~264VAC / 0.8A			90~264VAC / 1.5A
AC inrush current (max.)	Cold start, <35A at 230VAC			Cold start, <90A at 230VAC
Overload protection	Hiccup mode, auto-recovery			
Over voltage protection	110%~140% rated output voltage			110%~150% rated output voltage
Setup, rise, hold up time	300ms, 50ms, 16ms at full load			
Withstand voltage	I/P-O/P:5656VDC, I/P-FG:2828VDC, 1 minute for MES30A/30C/50A I/P-O/P:5656VDC, 1 minute for MES30B			
Working temperature	0~+65°C (refer to output derating curve)			
Safety standards	ANSI/AAMI ES60601-1, TUV EN60601-1, IEC60601-1 approved			
EMC standards	EN55011 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11 (EN60601-1-2)			
Standard output cable	120cm for 3.3~7.5V ; 180cm for 9~48V			
Standard output plug (refer to page 57 for DC plug list)	P1J: 2.1øx5.5øx11mm / C+, tuning fork type R1B: power Din 5P for MES50A 3.3~7.5V only			

■ Desktop (IEC 320-C14 / Class I) — 30W

Order No.	Output	Tol.	R&N	Effi.
MES30A-0P1J	3.3V, 0~5.00A	±8%	30mV	56%
MES30A-1P1J	5V, 0~5.00A	±5%	30mV	70%
MES30A-1-1P1J	7.5V, 0~3.33A	±4%	40mV	72%
MES30A-2P1J	9V, 0~3.33A	±4%	50mV	74%
MES30A-3P1J	12V, 0~2.50A	±3%	50mV	76%
MES30A-4P1J	15V, 0~2.00A	±2%	60mV	78%
MES30A-5P1J	18V, 0~1.66A	±2%	70mV	78%
MES30A-6P1J	24V, 0~1.25A	±2%	80mV	80%
MES30A-7P1J	28V, 0~1.07A	±2%	100mV	80%
MES30A-8P1J	48V, 0~0.62A	±2%	100mV	82%

■ Desktop (IEC 320-C6 / Class I) — 30W

Order No.	Output	Tol.	R&N	Effi.
MES30C-0P1J	3.3V, 0~5.00A	±8%	30mV	56%
MES30C-1P1J	5V, 0~5.00A	±5%	30mV	70%
MES30C-1-1P1J	7.5V, 0~3.33A	±4%	40mV	72%
MES30C-2P1J	9V, 0~3.33A	±4%	50mV	74%
MES30C-3P1J	12V, 0~2.50A	±3%	50mV	76%
MES30C-4P1J	15V, 0~2.00A	±2%	60mV	78%
MES30C-5P1J	18V, 0~1.66A	±2%	70mV	78%
MES30C-6P1J	24V, 0~1.25A	±2%	80mV	80%
MES30C-8P1J	48V, 0~0.62A	±2%	100mV	82%

■ Desktop (IEC 320-C14 / Class I) — 50W

Order No.	Output	Tol.	R&N	Effi.
MES50A-0R1B	3.3V, 0~7.50A	±10%	50mV	60%
MES50A-1R1B	5V, 0~7.50A	±6%	50mV	67%
MES50A-1-1R1B	7.5V, 0~5.33A	±5%	75mV	70%
MES50A-2P1J	9V, 0~5.00A	±5%	90mV	72%
MES50A-3P1J	12V, 0~4.16A	±3%	100mV	74%
MES50A-4P1J	15V, 0~3.33A	±3%	100mV	75%
MES50A-5P1J	18V, 0~2.77A	±3%	150mV	78%
MES50A-6P1J	24V, 0~2.08A	±2%	150mV	78%
MES50A-7P1J	28V, 0~1.78A	±2%	150mV	80%
MES50A-8P1J	48V, 0~1.04A	±2%	200mV	80%

■ Desktop (IEC 320-C8 / Class II) — 30W

Order No.	Output	Tol.	R&N	Effi.
MES30B-0P1J	3.3V, 0~5.00A	±8%	30mV	56%
MES30B-1P1J	5V, 0~5.00A	±5%	30mV	70%
MES30B-1-1P1J	7.5V, 0~3.33A	±4%	40mV	72%
MES30B-2P1J	9V, 0~3.33A	±4%	50mV	74%
MES30B-3P1J	12V, 0~2.50A	±3%	50mV	76%
MES30B-4P1J	15V, 0~2.00A	±2%	60mV	78%
MES30B-5P1J	18V, 0~1.66A	±2%	70mV	78%
MES30B-6P1J	24V, 0~1.25A	±2%	80mV	80%
MES30B-8P1J	48V, 0~0.62A	±2%	100mV	82%

Security Series

35~100W Single and Dual Output



35W, 50W, 75W Single Output

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Battery polarity (by fuse)
- Cooling by free air convection
- LED indicator for power on
- No load power consumption <0.75W
- Temperature compensation function (by external thermistor)
- 100% full load burn-in test
- 2 years warranty



AC input voltage range 85~264VAC/ 120~370VDC

AC inrush current Cold start, 45A

DC adjustment range 95%~115% rated output voltage

Overload protection 120%~165%, hiccup mode, auto-recovery

Over voltage protection 120%~140%, rated output voltage

Setup, rise, hold up time 500ms, 1200ms, 50ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -20~+70°C (refer to output derating curve)

Safety standards UL60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-1

Connection I/P: 3 poles, O/P: 2 poles screw terminal

Packing 0.37Kg ; 45pcs / 17.7Kg / 1CUFT (SCP-35)

0.45Kg ; 30pcs / 14.5Kg / 0.95CUFT (SCP-50)

0.5Kg ; 30pcs / 16.0Kg / 1CUFT (SCP-75)

SCP-35 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-35-12	13.8V, 0~2.6A	±2%	120mV	83%	36W
SCP-35-24	27.6V, 0~1.4A	±1%	200mV	86%	39W

SCP-50 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-50-12	13.8V, 0~3.6A	±2%	120mV	81%	50W
SCP-50-24	27.6V, 0~1.8A	±1%	200mV	85%	50W

SCP-75 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-75-12	13.8V, 0~5.4A	±2%	120mV	81%	75W
SCP-75-24	27.6V, 0~2.7A	±1%	200mV	85%	75W



We are a TQM (Total Quality Management) company and ISO-9001 certified since 1994.



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

60W Single Output with Battery Charger (UPS Function)



- Universal AC input / Full range
- 4"x 2" compact size
- Protections: Short circuit / Overload / Over voltage
- Battery low protection / Battery reverse polarity protection by fuse
- Alarm signal for AC OK and Battery low
- Cooling by free air convection
- 100% full load burn-in test
- Case available(PSC-60x-C)
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 30A at 115VAC, 60A at 230VAC

DC adjustment range CH1, 13.8V: 12~15V; 27.6V: 24~29V

Overload protection 105%~150% hiccup mode, auto-recovery

Over voltage protection CH1: 105%~135% rated output voltage

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -20~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,

EN61000-4-2,3,4,5,6,8,11

Connection 3+6P/ 3.96mm pitch, JST: B3P/B6P-VH

Packing 0.13kg ; 96pcs / 13.5kg / 0.89CUFT (PCB)

0.29kg ; 45pcs / 14.0kg / 0.67CUFT (case)

Model No.	Output	Tol.	R&N	Effi.	Max.
PSC-60A□	13.8V, 0~4.3A	±1%	120mV	84%	59W
	13.8V, 0~1.50A		(Charger)		
PSC-60B□	27.6V, 0~2.15A	±1%	240mV	84%	59W
	27.6V, 0~0.75A		(Charger)		

□ = blank, -C ; Blank: PCB Type, -C: Enclosed Type

100W Single Output with Battery Charger (UPS Function)



- Universal AC input / Full range
- 5"x3" compact size
- Protections: Short circuit / Overload / Over voltage
- Battery low protection / Battery reverse polarity protection by fuse
- Relay contact signal for AC OK and battery low
- Cooling by free air convection
- 100% full load burn-in test
- Case available(PSC-100x-C)
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 35A at 115VAC, 70A at 230VAC

DC adjustment range CH1, 13.8V: 12~15V; 27.6V: 24~29V

Overload protection 105%~150% hiccup mode, auto-recovery

Over voltage protection CH1: 105%~135% rated output voltage

Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -20~+70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Connection 3+8P/ 3.96mm pitch, 4P/2.5mm pitch,

JST:B3P/B8P-VH, B4B-XH

Packing 0.23kg ; 63pcs / 15.5kg / 1.35CUFT (PCB)

0.44kg ; 32pcs / 15.0kg / 0.64CUFT (case)

Model No.	Output	Tol.	R&N	Effi.	Max.
PSC-100A□	13.8V, 0~7.0A	±1%	100mV	86%	100W
	13.8V, 0~2.5A		(Charger)		
PSC-100B□	27.6V, 0~3.50A	±1%	100mV	88%	101W
	27.6V, 0~1.25A		(Charger)		

□ = blank, -C ; Blank: PCB Type, -C: Enclosed Type

Security Series

55~155W Single and Dual Output



55W 1~2 Output with Battery Charger

CB CE



CASE: 901 159x 97x 38 mm

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Battery low protection (except for ADS series)
- DC alarm signal (optional)
- Cooling by free air convection
- Fixed switching frequency at 45kHz
- Approvals: UL / CUL / TUV / CB / CE
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 88~264VAC; 124~370VDC

AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC

DC adjustment range 12V, 24V: ±10%

13.8V: 12~14.5V; 27.6V: 24~29V

Overload protection 105%~150% hiccup mode, auto-recovery

Over voltage protection CH1: 105%~135% rated output voltage

Setup, rise, hold up time 800ms, 50ms, 80ms at full load and 230VAC

Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -10~+60°C(refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Connection 8P/ 8.25mm pitch terminal block

Packing 0.57kg ; 24pcs / 13.7kg / 0.75CUFT

Single Output with 5V, 4A DC-DC Converter

Model No.	Output	Tol.	R&N	Effi.	Max.
ADS-5512	12V, 0~4.0A	±1%	100mV	76%	51W
	5V, 0~4.0A	±3%	100mV		
ADS-5524	24V, 0~2.5A	±1%	100mV	79%	58W
	5V, 0~4.0A	±3%	100mV		


Single Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
AD-55A	13.8V, 0~4.0A	±1%	100mV	71%	51W
	13.4V, 0~0.23A	(Charger)			
AD-55B	27.6V, 0~2.0A	±1%	100mV	74%	54W
	26.5V, 0~0.16A	(Charger)			

Dual Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
ADD-55A	13.8V, 0~3.50A	±1%	100mV	71%	53W
	5V, 0~4.00A	±3%	100mV		
	13.4V, 0~0.23A	(Charger)			
ADD-55B	27.6V, 0~2.00A	±1%	150mV	74%	55W
	5V, 0~4.00A	±3%	150mV		
	26.5V, 0~0.16A	(Charger)			

Block Diagram

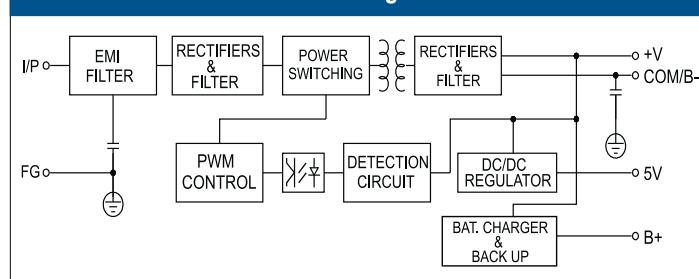

155W 1~2 Output with Battery Charger and PFC Function

CB CE



CASE: 906B 199x 110x 50 mm

- Universal AC input / Full range
- PF>0.92@230VAC and full load
- Protections: Short circuit / Overload / Over voltage
- Battery low protection (except for ADS series)
- DC alarm signal (optional)
- Cooling by free air convection
- Fixed switching frequency at 134kHz
- Approvals: UL / CUL / TUV / CB / CE
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 88~264VAC; 124~370VDC

AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC

DC adjustment range 12V, 24V, 48V: ±10%

13.8V: 12~14.5V; 27.6V: 24~29V; 54V: 48~58V

Overload protection CH1,2: 105%~135%, charger: 0.51~0.9A; constant current limiting, auto-recovery

Over voltage protection CH1: 115%~135% rated output voltage

Setup, rise, hold up time ... 1000ms, 90ms, 24ms at full load and 230VAC

Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1minute

Working temperature -10~+60°C(refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Connection 8P/ 9.5mm pitch terminal block

Packing 1.0kg ; 16pcs / 16.0kg / 0.95CUFT

Single Output with 5V, 3A DC-DC Converter

Model No.	Output	Tol.	R&N	Effi.	Max.
ADS-15512	12V, 0~12.5A	±2%	150mV	77%	153W
	5V, 0~3.00A	±3%	100mV		
ADS-15524	24V, 0~6.50A	±1%	150mV	82%	154W
	5V, 0~3.00A	±3%	100mV		
ADS-15548	48V, 0~3.20A	±1%	240mV	82%	154W
	5V, 0~3.00A	±5%	100mV		

Single Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
AD-155A	13.8V, 0~11.5A	±2%	150mV	80%	152W
	13.3V, 0~0.50A	(Charger)			
AD-155B	27.6V, 0~5.50A	±1%	150mV	84%	152W
	27.1V, 0~0.50A	(Charger)			
AD-155C	54.0V, 0~2.70A	±1%	240mV	84%	157W
	53.5V, 0~0.50A	(Charger)			

Dual Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
ADD-155A	13.8V, 0~10.5A	±1%	150mV	78%	153W
	5V, 0~3.00A	±3%	100mV		
	13.3V, 0~0.50A	(Charger)			
ADD-155B	27.6V, 0~5.00A	±1%	200mV	81%	153W
	5V, 0~3.00A	±3%	100mV		
	27.1V, 0~0.50A	(Charger)			
ADD-155C	54.0V, 0~2.50A	±1%	240mV	81%	150W
	53.5V, 0~0.20A	±5%	100mV		
	53.5V, 0~0.20A	(Charger)			

DC/DC Converter

0.5~1W Module Type



0.5W DC-DC Regulated Single Output



0.89" x 0.39" x 0.33"

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration										
<p>Unit: mm(inch)</p> <p>BOTTOM VIEW</p> <p>Pinout: Pin 1 & 16 (+Vin), Pin 6 & 11 (-Vout), Pin 7 & 10 (+Vout), Pin 8 & 9 (-Vin).</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1 & 16</td> <td>+Vin</td> </tr> <tr> <td>6 & 11</td> <td>-Vout</td> </tr> <tr> <td>7 & 10</td> <td>+Vout</td> </tr> <tr> <td>8 & 9</td> <td>-Vin</td> </tr> </tbody> </table>	Pin No.	Output	1 & 16	+Vin	6 & 11	-Vout	7 & 10	+Vout	8 & 9	-Vin
Pin No.	Output										
1 & 16	+Vin										
6 & 11	-Vout										
7 & 10	+Vout										
8 & 9	-Vin										

Voltage set point accuracy...±2% (typical)

Line regulation ±1% (max.)

Load regulation ±1% (max.)@10~100% load

Input reflected ripple 120mVp-p

Efficiency 60% (typical)

Short circuit protection continuous, auto-recovery

Switching frequency 50kHz (min.)

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100MΩ (min.)@ 500VDC

Isolation capacitance 80pF (max.)

Working temperature -25°C to +60°C (no derating), +71°C@80% load

Storage temperature -25°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)

Case material non-conductive plastic

1W DC-DC Unregulated Single Output



0.89" x 0.39" x 0.33"

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration										
<p>Unit: mm(inch)</p> <p>BOTTOM VIEW</p> <p>Pinout: Pin 1 & 16 (+Vin), Pin 6 & 11 (-Vout), Pin 7 & 10 (+Vout), Pin 8 & 9 (-Vin).</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1 & 16</td> <td>+Vin</td> </tr> <tr> <td>6 & 11</td> <td>-Vout</td> </tr> <tr> <td>7 & 10</td> <td>+Vout</td> </tr> <tr> <td>8 & 9</td> <td>-Vin</td> </tr> </tbody> </table>	Pin No.	Output	1 & 16	+Vin	6 & 11	-Vout	7 & 10	+Vout	8 & 9	-Vin
Pin No.	Output										
1 & 16	+Vin										
6 & 11	-Vout										
7 & 10	+Vout										
8 & 9	-Vin										

Voltage set point accuracy ...±2% (max.)

Line regulation ±1.2% (max.) for 1% input variation

Load regulation ±8% (max.)@20~100% load

Input reflected ripple 120mVp-p

Efficiency 83% (typical)

Short circuit protection Momentary

Switching frequency 50kHz (min.)

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100MΩ (min.)@ 500VDC

Isolation capacitance 80pF (max.)

Working temperature -25°C to +60°C (no derating), +71°C@80% load

Storage temperature -25°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)

Case material non-conductive plastic

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SRS-0505	5±10%	5	100	100
SRS-0509	5±10%	9	56	100
SRS-0512	5±10%	12	42	100
SRS-0515	5±10%	15	34	100
SRS-1205	12±10%	5	100	100
SRS-1209	12±10%	9	56	100
SRS-1212	12±10%	12	42	100
SRS-1215	12±10%	15	34	100
SRS-2405	24±10%	5	100	100
SRS-2409	24±10%	9	56	100
SRS-2412	24±10%	12	42	100
SRS-2415	24±10%	15	34	100
SRS-4805	48±10%	5	100	100
SRS-4809	48±10%	9	56	100
SRS-4812	48±10%	12	42	100
SRS-4815	48±10%	15	34	100

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SUS01L-05	5±10%	5	200	100
SUS01L-09	5±10%	9	111	100
SUS01L-12	5±10%	12	84	100
SUS01L-15	5±10%	15	67	100
SUS01M-05	12±10%	5	200	100
SUS01M-09	12±10%	9	111	100
SUS01M-12	12±10%	12	84	100
SUS01M-15	12±10%	15	67	100
SUS01N-05	24±10%	5	200	100
SUS01N-09	24±10%	9	111	100
SUS01N-12	24±10%	12	84	100
SUS01N-15	24±10%	15	67	100
SUS01O-05	48±10%	5	200	100
SUS01O-09	48±10%	9	111	100
SUS01O-12	48±10%	12	84	100
SUS01O-15	48±10%	15	67	100

DC/DC Converter

1W Module Type



1W DC-DC Unregulated Single Output



0.50" x 0.30" x 0.24"

- 1000VDC I/O isolation
- Internal SMD technology
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- SMD package style
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty

Mechanism	Pin Configuration																		
<p>Unit: mm(inch)</p> <p>TOP VIEW</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-Vin</td> </tr> <tr> <td>2</td> <td>+Vin</td> </tr> <tr> <td>3</td> <td>NC</td> </tr> <tr> <td>4</td> <td>-Vout</td> </tr> <tr> <td>5</td> <td>+Vout</td> </tr> <tr> <td>6</td> <td>NC</td> </tr> <tr> <td>7</td> <td>NC</td> </tr> <tr> <td>8</td> <td>NC</td> </tr> </tbody> </table>	Pin No.	Output	1	-Vin	2	+Vin	3	NC	4	-Vout	5	+Vout	6	NC	7	NC	8	NC
Pin No.	Output																		
1	-Vin																		
2	+Vin																		
3	NC																		
4	-Vout																		
5	+Vout																		
6	NC																		
7	NC																		
8	NC																		

Voltage set point accuracy ±8% (max.)
 Line regulation ±1.2% (max.) for 1% input variation
 Load regulation ±8% (max.)@20~100% load
 Input reflected ripple 100mVp-p
 Efficiency 75% (typical)
 Short circuit protection Momentary
 Switching frequency 100kHz (typical)
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100MΩ (min.)@ 500VDC
 Working temperature -40°C to +85°C
 Storage temperature -40°C to +105°C
 Temp. Coefficient ±0.03% / °C (max.)
 Case material non-conductive plastic
 Safety standards UL60950-1 approved

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SBT01L-05	5±10%	5	200	100
SBT01L-09	5±10%	9	111	100
SBT01L-12	5±10%	12	84	100
SBT01L-15	5±10%	15	67	100
SBT01M-05	12±10%	5	200	100
SBT01M-09	12±10%	9	111	100
SBT01M-12	12±10%	12	84	100
SBT01M-15	12±10%	15	67	100



We provide specification, drawing, test report and more information, please visit our website — <http://www.meanwell.com>



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

1W DC-DC Unregulated Single and Dual Output



0.60" x 0.30" x 0.24"

- 3000VDC I/O isolation
- Internal SMD technology
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- SMD package style
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty

Mechanism	Pin Configuration																		
<p>Unit: mm(inch)</p> <p>TOP VIEW</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-Vin</td> </tr> <tr> <td>2</td> <td>+Vin</td> </tr> <tr> <td>3</td> <td>NC</td> </tr> <tr> <td>4</td> <td>-Vout</td> </tr> <tr> <td>5</td> <td>+Vout</td> </tr> <tr> <td>6</td> <td>NC</td> </tr> <tr> <td>7</td> <td>NC</td> </tr> <tr> <td>8</td> <td>NC</td> </tr> </tbody> </table>	Pin No.	Output	1	-Vin	2	+Vin	3	NC	4	-Vout	5	+Vout	6	NC	7	NC	8	NC
Pin No.	Output																		
1	-Vin																		
2	+Vin																		
3	NC																		
4	-Vout																		
5	+Vout																		
6	NC																		
7	NC																		
8	NC																		

Voltage set point accuracy ±8% (max.)
 Line regulation ±1.2% (max.) for 1% input variation
 Load regulation ±8% (max.)@20~100% load
 Efficiency 79% (typical)
 Short circuit protection Momentary
 Switching frequency 100kHz (typical)
 I/O isolation voltage 3000VDC (min.)
 I/O isolation resistance 100MΩ (min.)@ 500VDC
 Working temperature -40°C to +85°C
 Storage temperature -40°C to +105°C
 Temp. Coefficient ±0.03% / °C (max.)
 Case material non-conductive plastic
 Safety standards UL60950-1, CSA C22.2 approved

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SFT01L-05	5±10%	5	200	100
SFT01L-09	5±10%	9	111	100
SFT01L-12	5±10%	12	84	100
SFT01L-15	5±10%	15	67	100
SFT01M-05	12±10%	5	200	100
SFT01M-09	12±10%	9	111	100
SFT01M-12	12±10%	12	84	100
SFT01M-15	12±10%	15	67	100

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DET01L-05	5±10%	±5	±100	100
DET01L-09	5±10%	±9	±56	100
DET01L-12	5±10%	±12	±42	100
DET01L-15	5±10%	±15	±33	100
DET01M-05	12±10%	±5	±100	100
DET01M-09	12±10%	±9	±56	100
DET01M-12	12±10%	±12	±42	100
DET01M-15	12±10%	±15	±33	100

DC/DC Converter

1W Module Type



1W DC-DC Regulated Single Output


FCC CE



0.77"x 0.28"x 0.4"

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Non-conductive plastic case
- Single in line package
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism

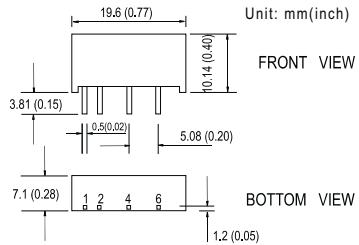

Pin Configuration

Pin No.	Output
1	+Vout
2	-Vin
4	-Vout
6	+Vout

Voltage set point accuracy ... ±2% (typical)

Line regulation ±1% (max.)

Load regulation ±1% (max.)@10~100% load

Efficiency 65% (typical)

Overload protection >110% hiccup mode, auto-recovery

Short circuit protection Continuous, auto-recovery

Switching frequency 50kHz (min.)

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100MΩ (min.)

Isolation capacitance 80pF (max.)

Working temperature -25~+71°C (refer to output derating curve)

Storage temperature -25°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)


Case material non-conductive plastic

EMC Compliance to EN55022 Class B,
EN61000-4-2,3,4,5,6,8, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPR01L-05	5±10%	5	200	100
SPR01L-09	5±10%	9	100	100
SPR01L-12	5±10%	12	84	100
SPR01L-15	5±10%	15	67	100
SPR01M-05	12±10%	5	200	100
SPR01M-09	12±10%	9	100	100
SPR01M-12	12±10%	12	84	100
SPR01M-15	12±10%	15	67	100
SPR01N-05	24±10%	5	200	100
SPR01N-09	24±10%	9	100	100
SPR01N-12	24±10%	12	84	100
SPR01N-15	24±10%	15	67	100
SPR01O-05	48±10%	5	200	100
SPR01O-09	48±10%	9	100	100
SPR01O-12	48±10%	12	84	100
SPR01O-15	48±10%	15	67	100

1W DC-DC Unregulated Single Output


FCC CE



0.46"x 0.24"x 0.4"
0.5"x 0.4"x 0.28"


- 1500VDC I/O isolation
- Operating temperature range -40~85°C without derating
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package for SMA01
- 100% full load burn-in test
- Industry standard pinout
- 2 years warranty

Mechanism

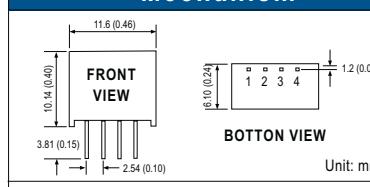

Pin Configuration

SMA01	
Pin No.	Output
1	-Vin
2	+Vin
3	-Vout
4	+Vout

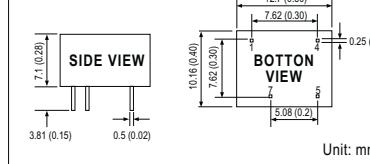

SMA01	
Pin No.	Output
1	-Vin
4	+Vin
5	+Vout
7	-Vout

Voltage set point accuracy ±2% (max.)

Line regulation ±1.2% (max.) for 1% input variation

Load regulation ±8% (max.)@20~100% load

Input reflected ripple 100mVp-p

Efficiency 80% (typical)

Short circuit protection Momentary

Switching frequency 100kHz (min.)

I/O isolation voltage 1500VDC (min.)

I/O isolation resistance 100MΩ (min.)@ 500VDC

Isolation capacitance 80pF (max.)

Working temperature -40~+85°C (no derating)

Storage temperature -40°C to +105°C

EMC Compliance to EN55022 Class B, EN61000-4-2,3,4,5,6,8, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SMU01L-05	5±10%	5	200	100
SMU01L-09	5±10%	9	110	100
SMU01L-12	5±10%	12	84	100
SMU01L-15	5±10%	15	67	100
SMU01M-05	12±10%	5	200	100
SMU01M-09	12±10%	9	110	100
SMU01M-12	12±10%	12	84	100
SMU01M-15	12±10%	15	67	100
SMU01N-05	24±10%	5	200	100
SMU01N-09	24±10%	9	110	100
SMU01N-12	24±10%	12	84	100
SMU01N-15	24±10%	15	67	100

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SMA01L-05	5±10%	5	200	100
SMA01L-09	5±10%	9	110	100
SMA01L-12	5±10%	12	84	100
SMA01L-15	5±10%	15	67	100
SMA01M-05	12±10%	5	200	100
SMA01M-09	12±10%	9	110	100
SMA01M-12	12±10%	12	84	100
SMA01M-15	12±10%	15	67	100
SMA01N-05	24±10%	5	200	100
SMA01N-09	24±10%	9	110	100
SMA01N-12	24±10%	12	84	100
SMA01N-15	24±10%	15	67	100

DC/DC Converter

2~3W Module Type



2~3W DC-DC Unregulated Single Output

FCC E



- 3000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Single in line package
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration										
	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>+Vin</td></tr> <tr> <td>2</td><td>-Vin</td></tr> <tr> <td>5</td><td>-Vout</td></tr> <tr> <td>7</td><td>+Vout</td></tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	-Vin	5	-Vout	7	+Vout
Pin No.	Output										
1	+Vin										
2	-Vin										
5	-Vout										
7	+Vout										

Voltage set point accuracy ... ±2% (max.)

Line regulation ±1.2% (max.) for 1% input variation

Load regulation ±8% (max.)@20~100% load

Efficiency 83% (typical) for SPU02; 88% (typical) for SPU03

Short circuit protection Momentary

Switching frequency 100kHz (min.) for SPU02; 60kHz (min.) for SPU03

I/O isolation voltage 3000VDC (min.)

I/O isolation resistance 100MΩ (min.)

Isolation capacitance 80pF (max.)

Working temperature -40~+71°C (refer to output derating curve) for SPU02
-40~+90°C (refer to output derating curve) for SPU03

Storage temperature -40°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)

Case material non-conductive plastic

EMC Compliance to EN55022 Class B,

EN61000-4-2,3,4,5,6,8, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPU02L-05	5±10%	5	400	100
SPU02L-12	5±10%	12	167	100
SPU02L-15	5±10%	15	133	100
SPU02M-05	12±10%	5	400	100
SPU02M-12	12±10%	12	167	100
SPU02M-15	12±10%	15	133	100
SPU02N-05	24±10%	5	400	100
SPU02N-12	24±10%	12	167	100
SPU02N-15	24±10%	15	133	100

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPU03L-05	5±10%	5	600	50
SPU03L-12	5±10%	12	250	50
SPU03L-15	5±10%	15	200	50
SPU03M-05	12±10%	5	600	50
SPU03M-12	12±10%	12	250	50
SPU03M-15	12±10%	15	200	50
SPU03N-05	24±10%	5	600	50
SPU03N-12	24±10%	12	250	50
SPU03N-15	24±10%	15	200	50

2~3W DC-DC Regulated Single Output

FCC E



- 2:1 wide input range
- 4:1 wide input range (option) for SPA02
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option) for SPA02
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Non-conductive plastic case
- Single in line package
- 100% full load burn-in test
- Modified models available: output 3.3V / 9V
- 2 years warranty

Mechanism	Pin Configuration																
	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>-Vin</td></tr> <tr> <td>2</td><td>+Vin</td></tr> <tr> <td>3</td><td>R.C.</td></tr> <tr> <td>5</td><td>N.C.</td></tr> <tr> <td>6</td><td>+Vout</td></tr> <tr> <td>7</td><td>-Vout</td></tr> <tr> <td>8</td><td>N.C.</td></tr> </tbody> </table>	Pin No.	Output	1	-Vin	2	+Vin	3	R.C.	5	N.C.	6	+Vout	7	-Vout	8	N.C.
Pin No.	Output																
1	-Vin																
2	+Vin																
3	R.C.																
5	N.C.																
6	+Vout																
7	-Vout																
8	N.C.																

Voltage set point accuracy ±2% (max.)

Line regulation ±0.5% (max.)

Load regulation ±0.5% (max.)@10~100% load

Efficiency 82% (typical)

Short circuit protection Continuous, auto-recovery

Overload protection 150%~250%, auto-recovery

Switching frequency 100KHz (min.)

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100MΩ (min.)

Isolation capacitance 80pF (max.)

Working temperature -40~+85°C (refer to output derating curve)

Storage temperature -40°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)

Case material non-conductive plastic

EMC Compliance to EN55022 Class B,

EN61000-4-2,3,4,5,6,8, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPA02E-05	4.5~9	5	400	60
SPA02E-12	4.5~9	12	150	60
SPA02E-15	4.5~9	15	120	60
SPA02A-05	9~18	5	400	60
SPA02A-12	9~18	12	167	60
SPA02A-15	9~18	15	133	60
SPA02B-05	18~36	5	400	60
SPA02B-12	18~36	12	167	60
SPA02B-15	18~36	15	133	60
SPA02C-05	36~72	5	400	60
SPA02C-12	36~72	12	167	60
SPA02C-15	36~72	15	133	60

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPB03E-05	4.5~9	5	600	50
SPB03E-12	4.5~9	12	250	60
SPB03E-15	4.5~9	15	200	60
SPB03A-05	9~18	5	600	50
SPB03A-12	9~18	12	250	60
SPB03A-15	9~18	15	200	60
SPB03B-05	18~36	5	600	50
SPB03B-12	18~36	12	250	60
SPB03B-15	18~36	15	200	60
SPB03C-05	36~72	5	600	50
SPB03C-12	36~72	12	250	60
SPB03C-15	36~72	15	200	60

DC/DC Converter

3~6W Module Type



3W DC-DC Regulated Single and Dual Output


FCC E



1.25"x 0.8"x 0.48"

- 2:1 wide input range
- 4:1 wide input range (option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism

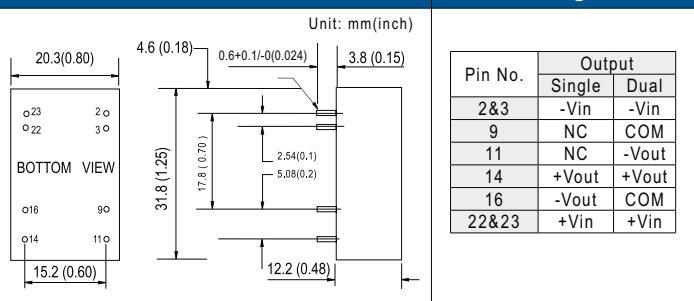

Pin Configuration

Voltage set point accuracy±2% (max.)
 Line regulation±0.5% (max.)
 Load regulation±0.5% (max.)@10~100% load
 Efficiency82% (typical)
 Short circuit protectionContinuous, auto-recovery
 Overload protection160%~250%, auto-recovery
 I/O isolation voltage1000VDC (min.)
 I/O isolation resistance100MΩ (min.)@ 500VDC
 Isolation capacitance80pF (max.)
 Working temperature-40~+71°C (refer to output derating curve)
 Storage temperature-40°C to +105°C
 Temp. Coefficient±0.03% / °C (max.)
 Case materialFive-sided shield metal case
 EMCCompliance to EN55022 Class B,
 EN61000-4-2,3,4,5,6,8, FCC part15 Class B

♦ Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW03A-05	9~18	5	600	50
SCW03A-12	9~18	12	250	60
SCW03A-15	9~18	15	200	60
SCW03B-05	18~36	5	600	50
SCW03B-12	18~36	12	250	60
SCW03B-15	18~36	15	200	60
SCW03C-05	36~72	5	600	50
SCW03C-12	36~72	12	250	60
SCW03C-15	36~72	15	200	60

♦ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW03A-05	9~18	±5	±300	50
DCW03A-12	9~18	±12	±125	60
DCW03A-15	9~18	±15	±100	60
DCW03B-05	18~36	±5	±300	50
DCW03B-12	18~36	±12	±125	60
DCW03B-15	18~36	±15	±100	60
DCW03C-05	36~72	±5	±300	50
DCW03C-12	36~72	±12	±125	60
DCW03C-15	36~72	±15	±100	60

5~6W DC-DC Regulated Single and Dual Output


FCC E



1.25"x 0.8"x 0.48"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism

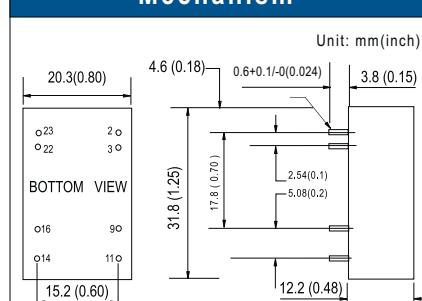

Pin Configuration

Voltage set point accuracy±2% (max.)
 Line regulation±0.5% (max.)
 Load regulation±0.5% (max.)@20~100% load
 Efficiency85% (typical)
 Short circuit protectioncontinuous, auto-recovery
 Overload protection150%~250%, auto-recovery
 I/O isolation voltage1000VDC (min.)
 I/O isolation resistance100MΩ (min.)@ 500VDC
 Isolation capacitance80pF (max.)
 Working temperature-40~+71°C (refer to output derating curve)
 Storage temperature-40°C to +105°C
 Temp. Coefficient±0.03% / °C (max.)
 Case materialFive-sided shield metal case
 EMCCompliance to EN55022 Class B,
 EN61000-4-2,3,4,5,6,8, FCC part15 Class B

♦ Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW05A-05	9~18	5	1000	50
SCW05A-09	9~18	9	556	60
SCW05A-12	9~18	12	470	60
SCW05A-15	9~18	15	400	60
SCW05B-05	18~36	5	1000	50
SCW05B-09	18~36	9	556	60
SCW05B-12	18~36	12	470	60
SCW05B-15	18~36	15	400	60
SCW05C-05	36~72	5	1000	50
SCW05C-09	36~72	9	556	60
SCW05C-12	36~72	12	470	60
SCW05C-15	36~72	15	400	60

♦ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW05A-05	9~18	±5	±500	50
DCW05A-12	9~18	±12	±230	60
DCW05A-15	9~18	±15	±190	60
DCW05B-05	18~36	±5	±500	50
DCW05B-12	18~36	±12	±230	60
DCW05B-15	18~36	±15	±190	60
DCW05C-05	36~72	±5	±500	50
DCW05C-12	36~72	±12	±230	60
DCW05C-15	36~72	±15	±190	60

DC/DC Converter

5~8W Module Type



5W DC-DC Regulated Single and Dual Output

FCC E



2"x 1"x 0.44"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																				
<p>Unit: mm(inch)</p>	<table border="1"> <thead> <tr> <th rowspan="2">Pin No.</th> <th colspan="2">Output</th> </tr> <tr> <th>Single</th> <th>Dual</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>+Vout</td> <td>+Vout</td> </tr> <tr> <td>4</td> <td>No Pin</td> <td>COM</td> </tr> <tr> <td>5</td> <td>-Vout</td> <td>-Vout</td> </tr> </tbody> </table>	Pin No.	Output		Single	Dual	1	+Vin	+Vin	2	-Vin	-Vin	3	+Vout	+Vout	4	No Pin	COM	5	-Vout	-Vout
Pin No.	Output																				
	Single	Dual																			
1	+Vin	+Vin																			
2	-Vin	-Vin																			
3	+Vout	+Vout																			
4	No Pin	COM																			
5	-Vout	-Vout																			

Voltage set point accuracy ...±2% (max.)

Line regulation±0.2% (max.)

Load regulation±0.5% (max.)@10~100% load

Efficiency85% (typical)

Short circuit protectioncontinuous, auto-recovery

Overload protection160%~250%, auto-recovery

I/O isolation voltage1000VDC (min.)

I/O isolation resistance100MΩ (min.)@ 500VDC

Working temperature-25~+71°C (refer to output derating curve)

Storage temperature-25°C to +105°C

Temp. Coefficient±0.03% / °C (max.)

Case materialSix-sided shield metal case

EMCCompliance to EN55022 Class B,
EN61000-4-2,3,4,5,6,8, FCC part15 Class B

◆ Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SLW05A-05	9~18	5	1000	50
SLW05A-09	9~18	9	556	60
SLW05A-12	9~18	12	417	60
SLW05A-15	9~18	15	333	60
SLW05B-05	18~36	5	1000	50
SLW05B-09	18~36	9	556	60
SLW05B-12	18~36	12	417	60
SLW05B-15	18~36	15	333	60
SLW05C-05	36~72	5	1000	50
SLW05C-09	36~72	9	556	60
SLW05C-12	36~72	12	417	60
SLW05C-15	36~72	15	333	60

◆ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DLW05A-05	9~18	±5	±500	50
DLW05A-12	9~18	±12	±208	60
DLW05A-15	9~18	±15	±167	60
DLW05B-05	18~36	±5	±500	50
DLW05B-12	18~36	±12	±208	60
DLW05B-15	18~36	±15	±167	60
DLW05C-05	36~72	±5	±500	50
DLW05C-12	36~72	±12	±208	60
DLW05C-15	36~72	±15	±167	60

8W DC-DC Regulated Single and Dual Output

FCC E



1.25"x 0.8"x 0.48"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																							
<p>Unit: mm(inch)</p>	<table border="1"> <thead> <tr> <th rowspan="2">Pin No.</th> <th colspan="2">Output</th> </tr> <tr> <th>Single</th> <th>Dual</th> </tr> </thead> <tbody> <tr> <td>2&3</td> <td>-Vin</td> <td>-Vin</td> </tr> <tr> <td>9</td> <td>NC</td> <td>COM</td> </tr> <tr> <td>11</td> <td>NC</td> <td>-Vout</td> </tr> <tr> <td>14</td> <td>+Vout</td> <td>+Vout</td> </tr> <tr> <td>16</td> <td>-Vout</td> <td>COM</td> </tr> <tr> <td>22&23</td> <td>+Vin</td> <td>+Vin</td> </tr> </tbody> </table>	Pin No.	Output		Single	Dual	2&3	-Vin	-Vin	9	NC	COM	11	NC	-Vout	14	+Vout	+Vout	16	-Vout	COM	22&23	+Vin	+Vin
Pin No.	Output																							
	Single	Dual																						
2&3	-Vin	-Vin																						
9	NC	COM																						
11	NC	-Vout																						
14	+Vout	+Vout																						
16	-Vout	COM																						
22&23	+Vin	+Vin																						

Voltage set point accuracy±2% (max.)

Line regulation±0.5% (max.)

Load regulation±0.5% (max.)@20~100% load

Efficiency82% (typical)

Short circuit protectioncontinuous, auto-recovery

Overload protection110%~250%, auto-recovery

I/O isolation voltage1000VDC (min.)

I/O isolation resistance100MΩ (min.)@ 500VDC

Isolation capacitance250pF (max.)

Working temperature-40~+71°C (refer to output derating curve)

Storage temperature-40°C to +105°C

Temp. Coefficient±0.03% / °C (max.)

Case materialFive-sided shield metal case

EMCCompliance to EN55022 Class B,

EN61000-4-2,3,4,5,6,8, FCC part15 Class B

◆ Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW08A-05	9~18	5	1600	50
SCW08A-12	9~18	12	670	60
SCW08A-15	9~18	15	533	60
SCW08B-05	18~36	5	1600	50
SCW08B-12	18~36	12	670	60
SCW08B-15	18~36	15	533	60
SCW08C-05	36~72	5	1600	50
SCW08C-12	36~72	12	670	60
SCW08C-15	36~72	15	533	60

◆ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW08A-05	9~18	±5	±800	50
DCW08A-12	9~18	±12	±335	60
DCW08A-15	9~18	±15	±267	60
DCW08B-05	18~36	±5	±800	50
DCW08B-12	18~36	±12	±335	60
DCW08B-15	18~36	±15	±267	60
DCW08C-05	36~72	±5	±800	50
DCW08C-12	36~72	±12	±335	60
DCW08C-15	36~72	±15	±267	60

DC/DC Converter

10~12W Module Type



10W DC-DC Regulated Single and Dual Output


FCC E



2" x 1" x 0.44"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism

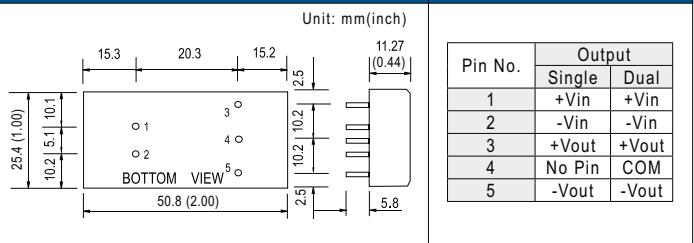

Voltage set point accuracy ...±2% (max.)

Line regulation ±0.3% (max.)

Load regulation ±0.5% (max.)@10~100% load

Efficiency 85% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 160%~250%, auto-recovery

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100MΩ (min.)@ 500VDC

Working temperature -25~+71°C (refer to output derating curve)

Storage temperature -25°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)

Case material Six-sided shield metal case

EMC Compliance to EN55022 Class B,
EN61000-4-2,3,4,5,6,8, FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SKE10A-05	9~18	5	2000	50
SKE10A-12	9~18	12	840	60
SKE10A-15	9~18	15	666	60
SKE10A-24	9~18	24	420	80
SKE10B-05	18~36	5	2000	50
SKE10B-12	18~36	12	840	60
SKE10B-15	18~36	15	666	60
SKE10B-24	18~36	24	420	80
SKE10C-05	36~72	5	2000	50
SKE10C-12	36~72	12	840	60
SKE10C-15	36~72	15	666	60
SKE10C-24	36~72	24	420	80

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKE10A-05	9~18	±5	±1000	50
DKE10A-12	9~18	±12	±420	60
DKE10A-15	9~18	±15	±333	60
DKE10A-24	9~18	±24	±210	80
DKE10B-05	18~36	±5	±1000	50
DKE10B-12	18~36	±12	±420	60
DKE10B-15	18~36	±15	±333	60
DKE10B-24	18~36	±24	±210	80
DKE10C-05	36~72	±5	±1000	50
DKE10C-12	36~72	±12	±420	60
DKE10C-15	36~72	±15	±333	60
DKE10C-24	36~72	±24	±210	80

12W DC-DC Regulated Single and Dual Output


FCC E



1.25" x 0.8" x 0.48"

- 2:1 wide input range
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- Modified models available: output 2.5V / 3.3V
- 2 years warranty

Mechanism

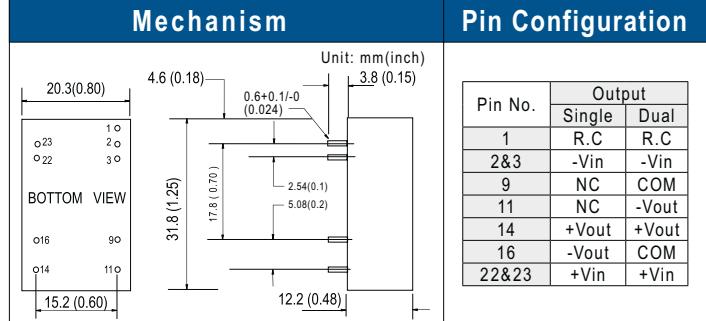

Voltage set point accuracy ...±2% (max.)

Line regulation ±0.5% (max.)

Load regulation ±0.5% (max.)@20~100% load

Efficiency 85% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 110%~180%, auto-recovery

I/O isolation voltage 1500VDC (min.)

I/O isolation resistance 100MΩ (min.)@ 500VDC

Working temperature -40~+71°C (refer to output derating curve)

Storage temperature -40°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)

Case material Five-sided shield metal case

EMC Compliance to EN55022 Class A,
EN61000-4-2,3,4,5,6,8, FCC part15 Class A

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW12A-05	9~18	5	2400	50
SCW12A-12	9~18	12	1000	60
SCW12A-15	9~18	15	800	60
SCW12B-05	18~36	5	2400	50
SCW12B-12	18~36	12	1000	60
SCW12B-15	18~36	15	800	60
SCW12C-05	36~72	5	2400	50
SCW12C-12	36~72	12	1000	60
SCW12C-15	36~72	15	800	60

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW12A-05	9~18	±5	±1200	50
DCW12A-12	9~18	±12	±500	60
DCW12A-15	9~18	±15	±400	60
DCW12B-05	18~36	±5	±1200	50
DCW12B-12	18~36	±12	±500	60
DCW12B-15	18~36	±15	±400	60
DCW12C-05	36~72	±5	±1200	50
DCW12C-12	36~72	±12	±500	60
DCW12C-15	36~72	±15	±400	60

DC/DC Converter

15W Module Type



15W DC-DC Regulated Single Output

FCC CE



1"x 1"x 0.39"

- 1"x1" compact size
- 2:1 wide input range
- 1500VDC I/O isolation
- High efficiency up to 88%
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output ($\pm 10\%$)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration														
<p>Unit: mm</p> <p>BOTTOM VIEW</p> <p>SIDE VIEW</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>R.C</td> </tr> <tr> <td>4</td> <td>-Vout</td> </tr> <tr> <td>5</td> <td>Trim</td> </tr> <tr> <td>6</td> <td>+Vout</td> </tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	-Vin	3	R.C	4	-Vout	5	Trim	6	+Vout
Pin No.	Output														
1	+Vin														
2	-Vin														
3	R.C														
4	-Vout														
5	Trim														
6	+Vout														

Voltage set point accuracy ... $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.) @10%~full load

Overload protection 110%~180%, auto-recovery

Over voltage protection Clamp by TVS diode

Efficiency 88% (typical)

I/O isolation voltage 1500VDC(min.)

I/O isolation resistance 100M Ω (min.) @500VDC

Working temperature -40~+80°C(refer to output derating curve)

Storage temperature -55°C to 100°C

Case Material Six-sided shield metal case

EMC Compliance to EN55022 class A,

EN61000-4-2,3,4,5,6,8, FCC part15 classA

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SKM15A-05	9~18	5	3.00	50
SKM15A-12	9~18	12	1.25	60
SKM15A-15	9~18	15	1.00	60
SKM15B-05	18~36	5	3.00	50
SKM15B-12	18~36	12	1.25	60
SKM15B-15	18~36	15	1.00	60
SKM15C-05	36~75	5	3.00	50
SKM15C-12	36~75	12	1.25	60
SKM15C-15	36~75	15	1.00	60

15W DC-DC Regulated Single and Dual Output

FCC CE



2"x 1"x 0.44"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism		Pin Configuration														
<p>Unit: mm(inch)</p>		<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>+Vout</td> </tr> <tr> <td>4</td> <td>No Pin</td> </tr> <tr> <td>5</td> <td>-Vout</td> </tr> <tr> <td>6</td> <td>+Vout</td> </tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	-Vin	3	+Vout	4	No Pin	5	-Vout	6	+Vout
Pin No.	Output															
1	+Vin															
2	-Vin															
3	+Vout															
4	No Pin															
5	-Vout															
6	+Vout															

Voltage set point accuracy ... $\pm 2\%$ (max.)

Line regulation $\pm 0.2\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)@10~100% load

Efficiency 82% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 110%~250%, auto-recovery

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100M Ω (min.)@ 500VDC

Working temperature -40~+71°C (refer to output derating curve)

Storage temperature -40°C to +105°C

Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material Six-sided shield metal case

EMC Compliance to EN55022 Class B,

EN61000-4-2,3,4,5,6,8, FCC part15 Class B

♦ Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SKA15A-033	9~18	3.3	3000	50
SKA15A-05	9~18	5	3000	50
SKA15A-12	9~18	12	1250	60
SKA15A-15	9~18	15	1000	60
SKA15B-033	18~36	3.3	3000	50
SKA15B-05	18~36	5	3000	50
SKA15B-12	18~36	12	1250	60
SKA15B-15	18~36	15	1000	60
SKA15C-033	36~72	3.3	3000	50
SKA15C-05	36~72	5	3000	50
SKA15C-12	36~72	12	1250	60
SKA15C-15	36~72	15	1000	60

♦ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKA15A-05	9~18	± 5	± 1500	50
DKA15A-12	9~18	± 12	± 625	60
DKA15A-15	9~18	± 15	± 500	60
DKA15B-05	18~36	± 5	± 1500	50
DKA15B-12	18~36	± 12	± 625	60
DKA15B-15	18~36	± 15	± 500	60
DKA15C-05	36~72	± 5	± 1500	50
DKA15C-12	36~72	± 12	± 625	60
DKA15C-15	36~72	± 15	± 500	60



To Satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service

DC/DC Converter

15~20W Module Type



15W DC-DC Regulated Single and Dual Output


FCC CE



2"x 2"x 0.43"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism

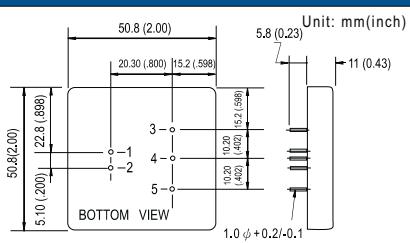

Pin Configuration

Pin No.	Output	
	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	COM
5	-Vout	-Vout

Voltage set point accuracy ... ±2% (max.)

Line regulation ±0.3% (max.)

Load regulation ±0.5% (max.)@10~100% load

Efficiency 85% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 160%~250%, auto-recovery

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100MΩ (min.)@ 500VDC

Working temperature -25~+71°C (refer to output derating curve)

Storage temperature -25°C to +105°C

Temp. Coefficient ±0.03% / °C (max.)

Case material Six-sided shield metal case

EMC Compliance to EN55022 Class B,

EN61000-4-2,3,4,5,6,8, FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SKE15A-05	9~18	5	3000	50
SKE15A-12	9~18	12	1250	60
SKE15A-15	9~18	15	1000	60
SKE15A-24	9~18	24	625	80
SKE15B-05	18~36	5	3000	50
SKE15B-12	18~36	12	1250	60
SKE15B-15	18~36	15	1000	60
SKE15B-24	18~36	24	625	80
SKE15C-05	36~72	5	3000	50
SKE15C-12	36~72	12	1250	60
SKE15C-15	36~72	15	1000	60
SKE15C-24	36~72	24	625	80

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKE15A-05	9~18	±5	±1500	50
DKE15A-12	9~18	±12	±625	60
DKE15A-15	9~18	±15	±500	60
DKE15A-24	9~18	±24	±313	80
DKE15B-05	18~36	±5	±1500	50
DKE15B-12	18~36	±12	±625	60
DKE15B-15	18~36	±15	±500	60
DKE15B-24	18~36	±24	±313	80
DKE15C-05	36~72	±5	±1500	50
DKE15C-12	36~72	±12	±625	60
DKE15C-15	36~72	±15	±500	60
DKE15C-24	36~72	±24	±313	80

20W DC-DC Regulated Single Output

FCC CE




2"x 1"x 0.44"

- 2"x 1" compact size
- 2:1 wide input range
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output (±10%)
- Protections:

 - Short circuit / Overload /
 - Input and output over voltage

- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism

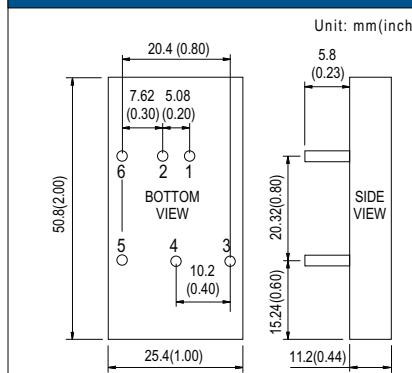

Pin Configuration

Pin No.	Output
1	+Vin
2	-Vin
3	+Vout
4	Trim
5	-Vout
6	R.C.

Voltage set point accuracy ±2% (max.)

Line regulation ±0.2% (max.)

Load regulation ±0.5% (max.)@10~100% load

Efficiency 89.5% (typical)

Short circuit protection Continuous, auto-recovery

Overload protection 110%~180%, auto-recovery

I/O isolation voltage 1500VDC (min.)

I/O isolation resistance 100MΩ (min.)@ 500VDC

Working temperature -40~+85°C (refer to output derating curve)

Storage temperature -55°C to +125°C

Temp. Coefficient ±0.03% / °C (max.)

Case material Six-sided shield metal case

EMC Compliance to EN55022 Class A,

EN61000-4-2,3,4,5,6,8, FCC part15 Class A

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SKA20A-05	9~18	5	4000	50
SKA20A-12	9~18	12	1666	60
SKA20A-15	9~18	15	1333	60
SKA20B-05	18~36	5	4000	50
SKA20B-12	18~36	12	1666	60
SKA20B-15	18~36	15	1333	60
SKA20C-05	36~75	5	4000	50
SKA20C-12	36~75	12	1666	60
SKA20C-15	36~75	15	1333	60



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —

DC/DC Converter

30W Module Type



30W DC-DC Regulated Single Output

FCC CE



2" x 1" x 0.44"

- 2"x1" compact size
- 2:1 wide input range
- 1500VDC I/O isolation
- High efficiency up to 90%
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output ($\pm 10\%$)
- Protections:
 - Short circuit / Overload / Input and output over voltage
 - Cooling by free air convection
 - Six-sided shield metal case
 - 100% full load burn-in test
 - Low cost, high reliability
 - 2 years warranty

Mechanism	Pin Configuration														
	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>R.C.</td> </tr> <tr> <td>4</td> <td>+Vout</td> </tr> <tr> <td>5</td> <td>-Vout</td> </tr> <tr> <td>6</td> <td>TRIM</td> </tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	-Vin	3	R.C.	4	+Vout	5	-Vout	6	TRIM
Pin No.	Output														
1	+Vin														
2	-Vin														
3	R.C.														
4	+Vout														
5	-Vout														
6	TRIM														

Voltage set point accuracy $\pm 2\%$ (max.)

Line regulation $\pm 0.2\%$ (max.)

Load regulation $\pm 0.5\%$ (max.) @ 10~100% load

Efficiency 90% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 110%~180%, auto-recovery

I/O isolation voltage 1500VDC (min.)

I/O isolation resistance 100M Ω (min.) @ 500VDC

Working temperature -40~+75°C (refer to output derating curve)

Storage temperature -55°C to +125°C

Temp. Coefficient $\pm 0.03\% / ^\circ\text{C}$ (max.)

Case material Six-sided shield metal case

EMC Compliance to EN55022 Class A,

EN61000-4-2,3,4,5,6,8, FCC part15 Class A

30W DC-DC Regulated Single Output

CE



2" x 2" x 0.63"

- 2:1 wide input range
- 1000VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output ($\pm 10\%$)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Compact size, high efficiency
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																		
	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>No Pin</td> </tr> <tr> <td>4</td> <td>Control ON/OFF</td> </tr> <tr> <td>5</td> <td>No Pin</td> </tr> <tr> <td>6</td> <td>+Vout</td> </tr> <tr> <td>7</td> <td>-Vout</td> </tr> <tr> <td>8</td> <td>TRIM</td> </tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	-Vin	3	No Pin	4	Control ON/OFF	5	No Pin	6	+Vout	7	-Vout	8	TRIM
Pin No.	Output																		
1	+Vin																		
2	-Vin																		
3	No Pin																		
4	Control ON/OFF																		
5	No Pin																		
6	+Vout																		
7	-Vout																		
8	TRIM																		

Voltage set point accuracy ... $\pm 2\%$ (max.) ($\pm 3\%$ for 3.3VDC models)

Line regulation $\pm 1\%$ (max.)

Load regulation $\pm 1\%$ (max.) @ 10~100% load

Overload protection Over 105% power limiting, auto-recovery

Over voltage protection 115%~150% rated output voltage

Efficiency (typical) 80% for 12V input

83% for 24V input

85% for 48V input

I/O isolation voltage 1000VDC(min.)

I/O isolation resistance 100M Ω (min.) @500VDC

Working temperature -25~+85°C(refer to output derating curve)

Storage temperature -25°C to +85°C

Case Material Six-sided shield metal case

EMC Compliance to EN55022 class B,

EN61000-4-2,3,4,6,8

Packing 0.1kg ; 150pcs / 15.8kg / 0.97CUFT

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SKM30A-05	9~18	5	6	90
SKM30A-12	9~18	12	2.5	120
SKM30A-15	9~18	15	2	120
SKM30B-05	18~36	5	6	90
SKM30B-12	18~36	12	2.5	120
SKM30B-15	18~36	15	2	120
SKM30C-05	36~75	5	6	90
SKM30C-12	36~75	12	2.5	120
SKM30C-15	36~75	15	2	120



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SDM30-12S3	9~18	3.3	5.0	75
SDM30-12S5	9~18	5	5.0	75
SDM30-12S12	9~18	12	2.1	100
SDM30-12S15	9~18	15	1.7	100
SDM30-24S3	18~36	3.3	5.0	75
SDM30-24S5	18~36	5	5.0	75
SDM30-24S12	18~36	12	2.5	100
SDM30-24S15	18~36	15	2.0	100
SDM30-48S3	36~72	3.3	5.0	75
SDM30-48S5	36~72	5	5.0	75
SDM30-48S12	36~72	12	2.5	100
SDM30-48S15	36~72	15	2.0	100

DC/DC Converter

25~60W Module Type



25~30W DC-DC Regulated Dual and Triple Output


FCC CE



2" x 2" x 0.82"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output ($\pm 10\%$) for dual output
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism

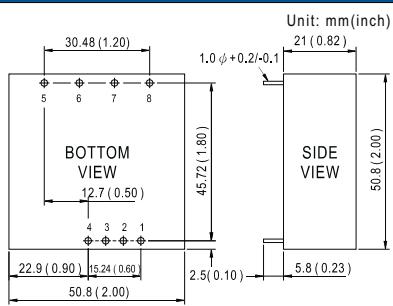

Pin Configuration

Pin No.	Output	
	Dual	Triple
1	R.C.	R.C.
2	No Pin	No Pin
3	-Vin	-Vin
4	+Vin	+Vin
5	+Vout	+Vout
6	COM	+5V
7	-Vout	COM
8	TRIM	-Vout

Voltage set point accuracy $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.) for dual output;
..... $\pm 1\%$ (max.) for triple output

Load regulation $\pm 0.5\%$ (10~100% load)(Dual)
..... $\pm 5\%$ (20~100% load)(Triple)

Efficiency 83% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 110%~250%, auto-recovery

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100MΩ (min.) @ 500VDC

Working temperature -40~+85°C (refer to output derating curve)

Storage temperature -40°C to +105°C

Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material Six-sided shield metal case

EMC Compliance to EN55022 Class B,
EN61000-4-2,3,4,5,6,8, FCC part15 Class B

♦ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKA30A-05	9~18	± 5	± 2500	100
DKA30A-12	9~18	± 12	± 1250	100
DKA30A-15	9~18	15	± 1000	100
DKA30B-05	18~36	± 5	± 2500	100
DKA30B-12	18~36	± 12	± 1250	100
DKA30B-15	18~36	± 15	± 1000	100
DKA30C-05	36~72	± 5	± 2500	100
DKA30C-12	36~72	± 12	± 1250	100
DKA30C-15	36~72	± 15	± 1000	100

♦ Triple Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
TKA30A-B	9~18	$+5 / \pm 12$	$3500 / \pm 310$	100
TKA30A-C	9~18	$+5 / \pm 15$	$3500 / \pm 250$	100
TKA30B-B	18~36	$+5 / \pm 12$	$3500 / \pm 310$	100
TKA30B-C	18~36	$+5 / \pm 15$	$3500 / \pm 250$	100
TKA30C-B	36~72	$+5 / \pm 12$	$3500 / \pm 310$	100
TKA30C-C	36~72	$+5 / \pm 15$	$3500 / \pm 250$	100


40~60W DC-DC Regulated Single Output

FCC CE



- 2"x2" compact size
- 2:1 wide input range
- 1500VDC I/O isolation
- High efficiency up to 93%
- Built-in remote ON/OFF control
- Built-in remote sense
- Built-in EMI filter
- Trimming output ($\pm 10\%$)
- Protections:
Short circuit / Overload / Input and output over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- Output 3.3V/9V models available for SKA40
- Output 3.3V available for SKA60
- 2 years warranty

Mechanism

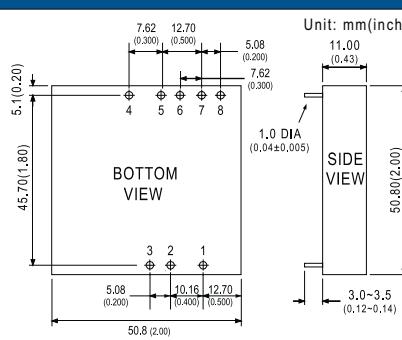

Pin Configuration

Pin No.	Output
1	R.C.
2	-Vin
3	+Vin
4	-R.S
5	+R.S
6	+Vout
7	-Vout
8	TRIM

Voltage set point accuracy ... $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.) @10~100% load

Overload protection 110%~180%, auto-recovery

Over voltage protection Clamp by TVS diode

Efficiency (typical)..... 92% for SKA40; 93% for SKA60

I/O isolation voltage 1500VDC(min.)

I/O isolation resistance 100MΩ(min.) @500VDC

Working temperature -40~+80°C(refer to output derating curve) for SKA40
-40~+70°C(refer to output derating curve) for SKA60

Storage temperature -55°C to +105°C

Case Material Six-sided shield metal case

EMC Compliance to EN55022 class A,
EN61000-4-2,3,4,5,6,8, FCC part15 classA

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SKA40A-05	9~18	5	7.00	60
SKA40A-12	9~18	12	3.33	80
SKA40A-15	9~18	15	2.67	100
SKA40B-05	18~36	5	7.00	60
SKA40B-12	18~36	12	3.33	80
SKA40B-15	18~36	15	2.67	100
SKA40C-05	36~75	5	7.00	60
SKA40C-12	36~75	12	3.33	80
SKA40C-15	36~75	15	2.67	100

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SKA60A-05	9~18	5	12	60
SKA60A-12	9~18	12	5	80
SKA60A-15	9~18	15	4	100
SKA60B-05	18~36	5	12	60
SKA60B-12	18~36	12	5	80
SKA60B-15	18~36	15	4	100
SKA60C-05	36~75	5	12	60
SKA60C-12	36~75	12	5	80
SKA60C-15	36~75	15	4	100

DC/DC Converter

75~100W Module Type



75W DC-DC Half-Brick Regulated Single Output



2.28" x 2.4" x 0.5"

- Half-brick size (2.28"x 2.4"x 0.5") with industry standard pin out
- 2:1 wide input range
- 1500VDC I/O isolation
- High efficiency up to 89%
- Built-in remote ON/OFF control
- Built-in remote sense
- Trimming output ($\pm 10\%$)
- Protections:
Short circuit / Over current / Over voltage / Over temperature
- Five-sided shield metal case
- Output 2.5V / 3.3V / 15V available
- Optional heatsink available
- 3 years warranty

100W DC-DC Half-Brick Regulated Single Output



2.28" x 2.4" x 0.5"

- Half-brick size (2.28"x 2.4"x 0.5") with industry standard pin out
- 2:1 wide input range
- 1500VDC I/O isolation
- High efficiency up to 89%
- Built-in remote ON/OFF control
- Built-in remote sense
- Trimming output ($\pm 10\%$)
- Protections:
Short circuit / Over current / Over voltage / Over temperature
- Five-sided shield metal case
- Output 2.5V / 3.3V / 15V available
- Optional heatsink available
- 3 years warranty

Mechanism	Pin Configuration																				
<p>Unit: mm(inch)</p> <p>Mounting Inserts M3*0.5 BOTTOM VIEW</p> <p>SIDE VIEW</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>R.C.</td> </tr> <tr> <td>3</td> <td>Case</td> </tr> <tr> <td>4</td> <td>-Vin</td> </tr> <tr> <td>5</td> <td>-Vout</td> </tr> <tr> <td>6</td> <td>-R.S.</td> </tr> <tr> <td>7</td> <td>Trim</td> </tr> <tr> <td>8</td> <td>+R.S.</td> </tr> <tr> <td>9</td> <td>+Vout</td> </tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	R.C.	3	Case	4	-Vin	5	-Vout	6	-R.S.	7	Trim	8	+R.S.	9	+Vout
Pin No.	Output																				
1	+Vin																				
2	R.C.																				
3	Case																				
4	-Vin																				
5	-Vout																				
6	-R.S.																				
7	Trim																				
8	+R.S.																				
9	+Vout																				

Voltage set point accuracy ... $\pm 1\%$ (max.)
 Line regulation $\pm 0.2\%$ (max.)
 Load regulation $\pm 0.2\%$ (max.)
 Over current protection 110%~150%, auto-recovery
 Over voltage protection 115%~140% rated output voltage, clamp by TVS diode
 Over temperature protection $100^\circ\text{C} \pm 5^\circ\text{C}$ of case temperature
 Efficiency 89% (typical)
 I/O isolation voltage 1500VDC(min.)
 I/O isolation resistance $100\text{M}\Omega$ (min.) @500VDC
 Working temperature -40~+100°C of case temp.(refer to output derating curve)
 Storage temperature -55~+105°C
 Safety standards UL60950-1 approved
 Case Material Five-sided shield metal case
 EMC Compliance to EN55022 class A with external components(refer to "EMC suggestion circuit"), EN61000-4-2,3,4,5,6,8

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
MHB75-12S05	9~18	5	15	75
MHB75-12S12	9~18	12	6.25	100
MHB75-12S24	9~18	24	3.13	240
MHB75-24S05	18~36	5	15	75
MHB75-24S12	18~36	12	6.25	100
MHB75-24S24	18~36	24	3.13	240
MHB75-48S05	36~75	5	15	75
MHB75-48S12	36~75	12	6.25	100
MHB75-48S24	36~75	24	3.13	240

Mechanism	Pin Configuration																				
<p>Unit: mm(inch)</p> <p>Mounting Inserts M3*0.5 BOTTOM VIEW</p> <p>SIDE VIEW</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>R.C.</td> </tr> <tr> <td>3</td> <td>Case</td> </tr> <tr> <td>4</td> <td>-Vin</td> </tr> <tr> <td>5</td> <td>-Vout</td> </tr> <tr> <td>6</td> <td>-R.S.</td> </tr> <tr> <td>7</td> <td>Trim</td> </tr> <tr> <td>8</td> <td>+R.S.</td> </tr> <tr> <td>9</td> <td>+Vout</td> </tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	R.C.	3	Case	4	-Vin	5	-Vout	6	-R.S.	7	Trim	8	+R.S.	9	+Vout
Pin No.	Output																				
1	+Vin																				
2	R.C.																				
3	Case																				
4	-Vin																				
5	-Vout																				
6	-R.S.																				
7	Trim																				
8	+R.S.																				
9	+Vout																				

Voltage set point accuracy ... $\pm 1\%$ (max.)
 Line regulation $\pm 0.2\%$ (max.)
 Load regulation $\pm 0.2\%$ (max.)
 Over current protection 110%~140%, auto-recovery
 Over voltage protection 115%~140% rated output voltage, clamp by TVS diode
 Over temperature protection $100^\circ\text{C} \pm 5^\circ\text{C}$ of case temperature
 Efficiency 89% (typical)
 I/O isolation voltage 1500VDC(min.)
 I/O isolation resistance $100\text{M}\Omega$ (min.) @500VDC
 Working temperature -40~+100°C of case temp.(refer to output derating curve)
 Storage temperature -55~+105°C
 Safety standards UL60950-1 approved
 Case Material Five-sided shield metal case
 EMC Compliance to EN55022 class A with external components(refer to "EMC suggestion circuit"), EN61000-4-2,3,4,5,6,8

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
MHB100-24S05	18~36	5	20	100
MHB100-24S12	18~36	12	8.3	150
MHB100-24S24	18~36	24	4.17	240
MHB100-48S05	36~75	5	20	100
MHB100-48S12	36~75	12	8.3	150
MHB100-48S24	36~75	24	4.17	240

Heat Sink for MHB Series

Order No.	M-C308 (Vertical Fins)	M-C091 (Horizontal Fins)	M-C092 (Horizontal Fins)
Mechanical	<p>58 48.20 50.80 50.30 2.850 15+7.80 R1 CR0.3 3.03 8.2</p>	<p>61 50.8 48.2 12.7 2.7</p>	<p>61 50.8 58 48.2 25.4 5.7</p>

Note: Power module and heat sink should be ordered separately; The heat sinks can be used with MHB75/100/150 series.

DC/DC Converter

150W Module Type / 5W On Board Type



150W DC-DC Half-Brick Regulated Single Output



2.28"x 2.4"x 0.5"

- Half-brick size (2.28"x 2.4"x 0.5") with industry standard pin out
- 2:1 wide input range
- 1500VDC I/O isolation
- High efficiency up to 89%
- Built-in remote ON/OFF control
- Built-in remote sense
- Trimming output ($\pm 10\%$)
- Protections:
Short circuit / Over current / Over voltage / Over temperature
- Five-sided shield metal case
- Output 2.5V / 3.3V / 15V available**
- Optional heatsink available
- 3 years warranty

Mechanism	Pin Configuration																				
<p>Unit: mm(inch)</p> <p>BOTTOM VIEW: Dimensions include 2.40(61.0), 2.00(50.8), 1.40(35.6), 0.60(15.24), 1.90(48.3), 2.28(57.9). Pinouts: +4, +3, +2, +1, -7, +8, +9.</p> <p>SIDE VIEW: Dimensions include 0.18 min.(4.6) to 0.50(12.7), 0.08(2.03) to 0.04(1.02), 0.15(3.8) to 0.30(7.6). Pinouts: +Vin, R.C., Case, -Vin, -Vout, -R.S., Trim, +R.S., +Vout.</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>R.C.</td> </tr> <tr> <td>3</td> <td>Case</td> </tr> <tr> <td>4</td> <td>-Vin</td> </tr> <tr> <td>5</td> <td>-Vout</td> </tr> <tr> <td>6</td> <td>-R.S.</td> </tr> <tr> <td>7</td> <td>Trim</td> </tr> <tr> <td>8</td> <td>+R.S.</td> </tr> <tr> <td>9</td> <td>+Vout</td> </tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	R.C.	3	Case	4	-Vin	5	-Vout	6	-R.S.	7	Trim	8	+R.S.	9	+Vout
Pin No.	Output																				
1	+Vin																				
2	R.C.																				
3	Case																				
4	-Vin																				
5	-Vout																				
6	-R.S.																				
7	Trim																				
8	+R.S.																				
9	+Vout																				

Voltage set point accuracy ... $\pm 1\%$ (max.)

Line regulation $\pm 0.2\%$ (max.)

Load regulation $\pm 0.2\%$ (max.)

Over current protection 110%~150%, auto-recovery

Over voltage protection 115%~140% rated output voltage, clamp by TVS diode

Over temperature protection $100^\circ\text{C} \pm 5^\circ\text{C}$ of case temperature

Efficiency 89% (typical)

I/O isolation voltage 1500VDC(min.)

I/O isolation resistance 100M Ω (min.) @500VDC

Working temperature -40~+100°C of case temp.(refer to output derating curve)

Storage temperature -55~+105°C

Safety standards UL60950-1 approved

Case Material Five-sided shield metal case

EMC Compliance to EN55022 class A with external components(refer to "EMC suggestion circuit"), EN61000-4-2,3,4,5,6,8


Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
MHB150-48S05	36~75	5	30	100
MHB150-48S12	36~75	12	12.5	150
MHB150-48S24	36~75	24	6.25	240



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

5W DC-DC Regulated Single Output



1.6"x 1"x 0.327"

- 4:1 wide input range
- 1000VDC I/O isolation
- Built-in EMI filter
- Protections: Short circuit / Overload / Over voltage
- Built-in remote ON/OFF control
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration												
<p>Unit: mm(inch)</p> <p>TOP VIEW: Dimensions include 40.6(1.6), 30.48(1.2), 10.16(0.4), 2.54(0.1), 2.54(0.1), 22.46(0.9), 6(0.248), 3(0.118), 1.5(0.059). Pinouts: +INPUT, -INPUT(GND), +Vout, -Vout, CONTROL.</p> <p>SIDE VIEW: Dimensions include 0.18 min.(4.6) to 0.50(12.7), 0.08(2.03) to 0.04(1.02), 0.15(3.8) to 0.30(7.6).</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+INPUT</td> </tr> <tr> <td>2</td> <td>-INPUT(GND)</td> </tr> <tr> <td>3</td> <td>+Vout</td> </tr> <tr> <td>4</td> <td>-Vout</td> </tr> <tr> <td>5</td> <td>CONTROL</td> </tr> </tbody> </table>	Pin No.	Output	1	+INPUT	2	-INPUT(GND)	3	+Vout	4	-Vout	5	CONTROL
Pin No.	Output												
1	+INPUT												
2	-INPUT(GND)												
3	+Vout												
4	-Vout												
5	CONTROL												

Voltage set point accuracy ... $\pm 2.0\%$ (max.)

Line regulation $\pm 1.0\%$ (max.)

Load regulation $\pm 1\pm 2\%$ (max.)@10%~full load

Efficiency 85% (typical)

Short circuit protection continuous, auto-recovery

Overload protection over 105% power limiting, auto-recovery

I/O isolation voltage 1000VDC

I/O isolation resistance 100M Ω (min.)@ 500VDC, 25°C 70% RH

Working temperature -25~+70°C (refer to output derating curve)

Storage temperature -40~+85°C

Temp. Coefficient $\pm 0.03\% / ^\circ\text{C}$ (0~60°C)

Safety standards IEC60950-1 CB approved by TUV

EMC standards EN55022 Class B, EN61000-4-2,3,4,5,6,8

Packing 0.007kg ; 700pcs / 5.9kg / 0.97CUFT

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD05-12S3	9.2~36	3.3	1200	75
NSD05-12S5	9.2~36	5	1000	75
NSD05-12S12	9.2~36	12	420	75
NSD05-12S15	9.2~36	15	330	75
NSD05-48S3	18~72	3.3	1200	75
NSD05-48S5	18~72	5	1000	75
NSD05-48S12	18~72	12	420	75
NSD05-48S15	18~72	15	330	75



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.

DC/DC Converter

10~15W On Board Type



10W DC-DC Regulated Single and Dual Output



2"x 1"x 0.394"

- 4:1 wide input range
- 1000VDC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter
- Built-in remote ON/OFF control
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																							
<p>Unit: mm(inch)</p>	<table border="1"> <thead> <tr> <th rowspan="2">Pin No.</th> <th colspan="2">Output</th> </tr> <tr> <th>Single</th> <th>Dual</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+INPUT</td> <td>+INPUT</td> </tr> <tr> <td>2</td> <td>-INPUT (GND)</td> <td>-INPUT (GND)</td> </tr> <tr> <td>3</td> <td>+OUT</td> <td>+OUT</td> </tr> <tr> <td>4</td> <td>NC</td> <td>COMMON</td> </tr> <tr> <td>5</td> <td>-OUT</td> <td>-OUT</td> </tr> <tr> <td>6</td> <td>CONTROL</td> <td>CONTROL</td> </tr> </tbody> </table>	Pin No.	Output		Single	Dual	1	+INPUT	+INPUT	2	-INPUT (GND)	-INPUT (GND)	3	+OUT	+OUT	4	NC	COMMON	5	-OUT	-OUT	6	CONTROL	CONTROL
Pin No.	Output																							
	Single	Dual																						
1	+INPUT	+INPUT																						
2	-INPUT (GND)	-INPUT (GND)																						
3	+OUT	+OUT																						
4	NC	COMMON																						
5	-OUT	-OUT																						
6	CONTROL	CONTROL																						

Voltage set point accuracy ±2% (max.)

Line regulation ±1% @10%~full load

Load regulation ±1~±3% @10%~full load

Efficiency 80% (typical)

Short circuit protection continuous, auto-recovery

Over voltage protection clamp@115~150%

Shutdown idle current 20mA

I/O isolation voltage 1000VDC

I/O isolation resistance 100MΩ(min.) @500VDC

Working temperature -25~+70°C

Storage temperature -40~+85°C

Temp. coefficient ±0.03% / °C(0~60°C)

Safety standards UL60950-1 approved

EMC standards EN55022 Class B, EN61000-4-2,3,4,6,8

Packing 0.02kg ; 300pcs / 7.0kg / 0.97CUFT

♦ Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD10-12S3	9.8~36	3.3	2500	75
NSD10-12S5	9.8~36	5	2000	75
NSD10-12S9	9.8~36	9	1100	75
NSD10-12S12	9.8~36	12	830	75
NSD10-12S15	9.8~36	15	670	75
NSD10-48S3	22~72	3.3	2500	75
NSD10-48S5	22~72	5	2000	75
NSD10-48S9	22~72	9	1100	75
NSD10-48S12	22~72	12	830	75
NSD10-48S15	22~72	15	670	75

♦ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD10-12D5	9.8~36	±5	±50~1000	75
NSD10-12D12	9.8~36	±12	±20~420	75
NSD10-12D15	9.8~36	±15	±16~330	75
NSD10-48D5	22~72	±5	±50~1000	75
NSD10-48D12	22~72	±12	±20~420	75
NSD10-48D15	22~72	±15	±16~330	75

15W DC-DC Regulated Single and Dual Output



2"x 1.5"x 0.387"

- 4:1 wide input range
- 1500VDC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter
- Output voltage trimming function
- Built-in remote ON/OFF control
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																													
<p>Unit: mm(inch)</p>	<table border="1"> <thead> <tr> <th rowspan="2">Pin No.</th> <th colspan="2">Output</th> </tr> <tr> <th>Single</th> <th>Dual</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>No Pin</td> <td>No Pin</td> </tr> <tr> <td>4</td> <td>CONTROL</td> <td>CONTROL</td> </tr> <tr> <td>5</td> <td>No Pin</td> <td>+Vout</td> </tr> <tr> <td>6</td> <td>+Vout</td> <td>COMMON</td> </tr> <tr> <td>7</td> <td>-Vout</td> <td>-Vout</td> </tr> <tr> <td>8</td> <td>TRIM</td> <td>TRIM</td> </tr> </tbody> </table>	Pin No.	Output		Single	Dual	1	+Vin	+Vin	2	-Vin	-Vin	3	No Pin	No Pin	4	CONTROL	CONTROL	5	No Pin	+Vout	6	+Vout	COMMON	7	-Vout	-Vout	8	TRIM	TRIM
Pin No.	Output																													
	Single	Dual																												
1	+Vin	+Vin																												
2	-Vin	-Vin																												
3	No Pin	No Pin																												
4	CONTROL	CONTROL																												
5	No Pin	+Vout																												
6	+Vout	COMMON																												
7	-Vout	-Vout																												
8	TRIM	TRIM																												

Voltage set point accuracy ±2% (max.)

Line regulation ±1% @10%~full load

Load regulation ±1~±3% @10%~full load

Efficiency 85% (typical)

Short circuit protection continuous, auto-recovery

Over voltage protection clamp@115~150%

Shutdown idle current 20mA

I/O isolation voltage 1500VDC

I/O isolation resistance 100MΩ(min.) @500VDC

Working temperature -25~+70°C

Storage temperature -40~+85°C

Temp. coefficient ±0.03% / °C(0~50°C)

Safety standards UL60950-1 approved

EMC standards EN55022 Class B, EN61000-4-2,3,4,6,8

Packing 0.03kg ; 180pcs / 6.4kg / 0.97CUFT

♦ Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD15-12S3	9.4~36	3.3	3750	100
NSD15-12S5	9.4~36	5	3000	75
NSD15-12S12	9.4~36	12	1250	75
NSD15-12S15	9.4~36	15	1000	75
NSD15-48S3	18~72	3.3	3750	100
NSD15-48S5	18~72	5	3000	75
NSD15-48S12	18~72	12	1250	75
NSD15-48S15	18~72	15	1000	75

♦ Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD15-12D5	9.4~36	±5	±70~1500	100
NSD15-12D12	9.4~36	±12	±30~620	100
NSD15-12D15	9.4~36	±15	±20~500	100
NSD15-48D5	18~72	±5	±70~1500	100
NSD15-48D12	18~72	±12	±30~620	100
NSD15-48D15	18~72	±15	±20~500	100


DC/DC Converter

12.5~60W On Board Type / 5~15W PCB Type



12.5~60W Single Output Non-isolated DC-DC Converter

- Non-isolated, fix-frequency at 250kHz
- 3:1 wide input range for 5~15V output
- $\pm 2\%$ output voltage accuracy
- **High efficiency up to 96%**
- Built-in remote ON/OFF control
- Compact size
- Cooling by free air convection
- **Economical open frame design**
- Protections: Short circuit / Overload / Over voltage
- 2 years warranty

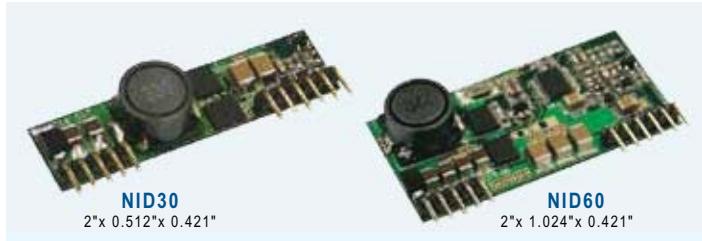

NID30 Series

Mechanism	Pin Configuration												
<p>Unit: mm(inch)</p> <p>10.7(0.421)max. 8(0.315)</p> <p>SIDE VIEW</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1,2,3,4</td> <td>+Vout</td> </tr> <tr> <td>5,6</td> <td>COM</td> </tr> <tr> <td>7,8</td> <td>+Vin</td> </tr> <tr> <td>9,10</td> <td>N.C.</td> </tr> <tr> <td>11</td> <td>R.C.</td> </tr> </tbody> </table>	Pin No.	Output	1,2,3,4	+Vout	5,6	COM	7,8	+Vin	9,10	N.C.	11	R.C.
Pin No.	Output												
1,2,3,4	+Vout												
5,6	COM												
7,8	+Vin												
9,10	N.C.												
11	R.C.												

NID60 Series

Mechanism	Pin Configuration												
<p>Unit: mm(inch)</p> <p>10.7(0.421)max. 8(0.315)</p> <p>SIDE VIEW</p>	<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1,2,3,4</td> <td>+Vout</td> </tr> <tr> <td>5,6</td> <td>COM</td> </tr> <tr> <td>7,8</td> <td>+Vin</td> </tr> <tr> <td>9,10</td> <td>N.C.</td> </tr> <tr> <td>11</td> <td>R.C.</td> </tr> </tbody> </table>	Pin No.	Output	1,2,3,4	+Vout	5,6	COM	7,8	+Vin	9,10	N.C.	11	R.C.
Pin No.	Output												
1,2,3,4	+Vout												
5,6	COM												
7,8	+Vin												
9,10	N.C.												
11	R.C.												

Voltage set point accuracy $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$

Load regulation $\pm 0.5\%$ @ 10~100% load

Efficiency 96% (typical)

Short circuit protection Continuous, auto-recovery

Overload protection 120%~300%, auto-recovery

Over voltage protection Clamp by TVS Diode

Working temperature -40~+65°C (refer to derating curve)

Storage temperature -40~+105°C

Temp. coefficient $\pm 0.03\%$ / °C(0~50°C)

NID30 Series


Model No.	Input	Output	R&N	Effi
NID30S24-05	20~53V	5V, 0~2.50A	100mV	91%
NID30S24-12	20~53V	12V, 0~2.50A	120mV	95%
NID30S24-15	20~53V	15V, 0~2.00A	150mV	96%
NID30S48-24	30~53V	24V, 0~1.25A	200mV	93%

NID60 Series

Model No.	Input	Output	R&N	Effi
NID60S24-05	20~53V	5V, 0~4.0A	100mV	90%
NID60S24-12	20~53V	12V, 0~4.0A	120mV	95%
NID60S24-15	20~53V	15V, 0~4.0A	150mV	96%
NID60S48-24	30~53V	24V, 0~2.5A	200mV	95%

5W Single Output DC-DC Converter

- 2:1 wide input range
- 2000VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

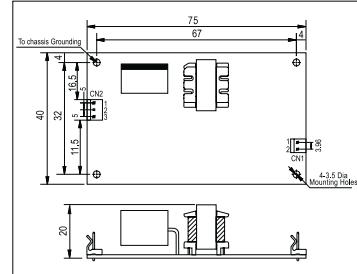

Line and load regulation ... $\pm 1.0\%$ (max.)

Overload protection >105% fold back current limiting, auto-recovery

Over voltage protection 115%~135% rated output voltage

Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100MΩ (min.) @500VDC

Working temperature -10~+60°C (refer to output derating curve)

Safety standards Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8


Connection 3P, 2P / 3.96mm pitch, Molex 5285-03, 5273-02

Packing 0.05kg ; 120pcs / 6.25kg / 1.0CUFT

Model No.	Input	Output	R&N	Effi.
PSD-05-5	36~72V	5V, 0~1.0A	50mV	75%
PSD-05-12	36~72V	12V, 0~0.45A	100mV	78%
PSD-05-24	36~72V	24V, 0~0.22A	150mV	78%

15W Single Output DC-DC Converter

- 2:1 wide input range
- 2000VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage / Polarity
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

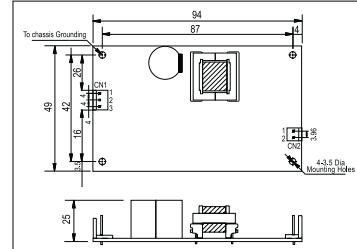

Line and load regulation $\pm 1.0\%$ (max.)

Overload protection 105%~150% hiccup mode, auto-recovery

Over voltage protection 115%~135% rated output voltage

Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100MΩ (min.) @500VDC

Working temperature -10~+60°C (refer to output derating curve)

Safety standards Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Connection 3P, 2P / 3.96mm pitch, JST B3P/B2P-VH

Packing 0.081kg ; 120pcs / 10.72kg

Model No.	Input	Output	R&N	Effi.
PSD-15A-5	9.2~18V	5V, 0~3.0A	50mV	74%
PSD-15A-12	9.2~18V	12V, 0~1.25A	100mV	67%
PSD-15A-24	9.2~18V	24V, 0~0.6A	100mV	72%
PSD-15B-5	18~36V	5V, 0~3.0A	50mV	78%
PSD-15B-12	18~36V	12V, 0~1.25A	100mV	78%
PSD-15B-24	18~36V	24V, 0~0.6A	100mV	78%
PSD-15C-5	36~72V	5V, 0~3.0A	50mV	78%
PSD-15C-12	36~72V	12V, 0~1.25A	100mV	78%
PSD-15C-24	36~72V	24V, 0~0.6A	100mV	79%

DC/DC Converter

30~45W PCB Type / 15~25W Enclosed



30W Single Output DC-DC Converter

CE



101.6x 50.8x 30 mm

- 2:1 wide input range
- Protections: Short circuit / Overload / Over voltage / Reverse polarity
- 1500VAC I/O isolation
- Cooling by free air convection
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~13.5V, 24V: 22~26V

Line and load regulation .. ±1% (max.)

Overload protection 105%~150% hiccup mode, auto-recovery

Over voltage protection ... 115%~150% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -20~+55°C (refer to output derating curve)

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, EN55024

Connection 3P, 4P / 3.96mm pitch, JST B3P/B4P-VH-B

Model No.	Input	Output	R&N	Effi.
PSD-30A-05	9~18V	5V, 0~5.0A	100mV	77%
PSD-30A-12	9~18V	12V, 0~2.5A	120mV	77%
PSD-30A-24	9~18V	24V, 0~1.25A	150mV	78%
PSD-30B-05	18~36V	5V, 0~5.0A	100mV	79%
PSD-30B-12	18~36V	12V, 0~2.5A	120mV	80%
PSD-30B-24	18~36V	24V, 0~1.25A	150mV	83%
PSD-30C-05	36~72V	5V, 0~5.0A	100mV	80%
PSD-30C-12	36~72V	12V, 0~2.5A	120mV	82%
PSD-30C-24	36~72V	24V, 0~1.25A	150mV	83%

45W Single Output DC-DC Converter

CB CE



127x 76x 30 mm

- 2:1 wide input range
- Protections: Short circuit / Overload / Over voltage / Reverse polarity
- Cooling by free air convection
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Fixed switching frequency at 96kHz
- Low cost
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 10.8~13.2V,

24V: 21.6~26.4V

Line and load regulation ±1% (max.)

Overload protection 105%~160% shut down, re-power on to recover

Over voltage protection 115%~135% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standards EN60950-1 CB approved by TUV

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, EN55024

Connection 2P, 6P / 3.96mm pitch, Molex 5277-02, 5273-06

Packing 0.19kg ; 72pcs / 15.6kg / 1.35CUFT

Model No.	Input	Output	R&N	Effi.
PSD-45A-05	9.2~18V	5V, 0~6.0A	100mV	74%
PSD-45A-12	9.2~18V	12V, 0~2.5A	120mV	79%
PSD-45A-24	9.2~18V	24V, 0~1.25A	150mV	80%
PSD-45B-05	18~36V	5V, 0~9.0A	100mV	77%
PSD-45B-12	18~36V	12V, 0~3.75A	120mV	82%
PSD-45B-24	18~36V	24V, 0~1.875A	150mV	85%
PSD-45C-05	37~72V	5V, 0~9.0A	100mV	80%
PSD-45C-12	37~72V	12V, 0~3.75A	120mV	83%
PSD-45C-24	37~72V	24V, 0~1.875A	150mV	86%

15W Single Output DC-DC Converter

CE



CASE: 931A

78x 51x 28 mm

- 2:1 wide input range
- 2000VAC I/O isolation
- Cooling by free air convection
- Protections: Short circuit / Over load / Over voltage
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 5V: 4.75~5.5V, 12V: 10.8~13.2V, 24V: 21.6~26.4V

Line and load regulation ±0.5% (max.)

Overload protection 105%~160% hiccup mode, auto-recovery

Over voltage protection 115%~135% rated output voltage

Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standard Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 0.18kg ; 60pcs / 11.8kg

Model No.	Input	Output	R&N	Effi.
SD-15A-5	9.2~18V	5V, 0~3.0A	100mV	68%
SD-15A-12	9.2~18V	12V, 0~1.25A	120mV	72%
SD-15A-24	9.2~18V	24V, 0~0.625A	150mV	70%
SD-15B-5	18~36V	5V, 0~3.0A	100mV	76%
SD-15B-12	18~36V	12V, 0~1.25A	120mV	76%
SD-15B-24	18~36V	24V, 0~0.625A	150mV	77%
SD-15C-5	36~72V	5V, 0~3.0A	100mV	75%
SD-15C-12	36~72V	12V, 0~1.25A	120mV	79%
SD-15C-24	36~72V	24V, 0~0.625A	150mV	78%

25W Single Output DC-DC Converter

CE



CASE: 905

99x 97x 36 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V

Line and load regulation ±0.5% (max.)

Overload protection 105%~150% hiccup mode, auto-recovery

Over voltage protection 115%~165% rated output voltage

Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100MΩ (min.) @500VDC

Working temperature -10~+60°C (refer to output derating curve)

Safety standards Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 0.38kg ; 45pcs / 17.8kg / 0.9CUFT

Model No.	Input	Output	R&N	Effi.
SD-25A-5	9.2~18V	5V, 0~5.0A	100mV	71%
SD-25A-12	9.2~18V	12V, 0~2.1A	120mV	72%
SD-25A-24	9.2~18V	24V, 0~1.1A	150mV	75%
SD-25B-5	19~36V	5V, 0~5.0A	100mV	72%
SD-25B-12	19~36V	12V, 0~2.1A	120mV	75%
SD-25B-24	19~36V	24V, 0~1.1A	150mV	78%
SD-25C-5	36~72V	5V, 0~5.0A	100mV	74%
SD-25C-12	36~72V	12V, 0~2.1A	120mV	78%
SD-25C-24	36~72V	24V, 0~1.1A	150mV	81%

DC/DC Converter

50~200W Enclosed Single Output



50W Single Output DC-DC Converter

CE



CASE: 901

159x 97x 38 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Over load / Over voltage
- Built-in EMI filter, low ripple noise
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V

Line and load regulation $\pm 0.5\%$ (max.)

Overload protection 105%~150% hiccup mode, auto-recovery

Over voltage protection 115%~165% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100M Ω (min.) @500VDC

Working temperature -10~+60°C (refer to output derating curve)

Safety standard Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8


Packing 0.53kg ; 24pcs / 12.7kg / 0.75CUFT

Model No.	Input	Output	R&N	Effi.
SD-50A-5	9.2~18V	5V, 0~10A	100mV	70%
SD-50A-12	9.2~18V	12V, 0~4.2A	120mV	72%
SD-50A-24	9.2~18V	24V, 0~2.1A	150mV	74%
SD-50B-5	19~36V	5V, 0~10A	100mV	73%
SD-50B-12	19~36V	12V, 0~4.2A	120mV	75%
SD-50B-24	19~36V	24V, 0~2.1A	150mV	80%
SD-50C-5	36~72V	5V, 0~10A	100mV	76%
SD-50C-12	36~72V	12V, 0~4.2A	120mV	78%
SD-50C-24	36~72V	24V, 0~2.1A	150mV	83%

100W Single Output DC-DC Converter

CB CE

(D type)



CASE: 902

199x 98x 38 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)

Overload protection 105%~135% hiccup mode, auto-recovery

Over voltage protection 115%~165% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100M Ω (min.) @500VDC

Working temperature -10~+60°C (refer to output derating curve)

Safety standards Meet LVD, EN60950-1 CB approved by TUV (D type only)

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 0.65kg ; 20pcs / 13.8kg / 0.8CUFT

Model No.	Input	Output	R&N	Effi.
SD-100B-5	19~36V	5V, 0~20A	100mV	74%
SD-100B-12	19~36V	12V, 0~8.5A	120mV	75%
SD-100B-24	19~36V	24V, 0~4.2A	150mV	78%
SD-100C-5	36~72V	5V, 0~20A	100mV	75%
SD-100C-12	36~72V	12V, 0~8.5A	120mV	77%
SD-100C-24	36~72V	24V, 0~4.2A	150mV	81%
SD-100D-5	72~144V	5V, 0~20A	100mV	76%
SD-100D-12	72~144V	12V, 0~8.5A	120mV	80%
SD-100D-24	72~144V	24V, 0~4.2A	150mV	83%

150W Single Output DC-DC Converter

CB CE

(D type)



CASE: 906

199x 110x 50 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Over load / Over voltage
- Built-in EMI filter, low ripple noise
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 12V: 11~16V, 24V: 23~30V

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)

Overload protection 105%~135% hiccup mode, auto-recovery

Over voltage protection 130%~165% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100M Ω (min.) @500VDC

Working temperature -10~+60°C (refer to output derating curve)

Safety standards Meet LVD, EN60950-1 CB approved by TUV (D type only)

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 0.86kg ; 16pcs / 14.5kg / 0.95CUFT

200W Single Output DC-DC Converter

UL CB CE

(SD-200C-24) (D type)



CASE: 912H

215x 115x 50 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V, 48V: 43~53V

Voltage tolerance..... $\pm 2\%$ (max.)

Overload protection 105%~135% shut off, re-power on to recover

Over voltage protection 110%~167% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -20~+60°C (refer to output derating curve)

Safety standards Meet LVD, EN60950-1 CB approved by TUV (D type only)

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 1.1kg ; 12pcs / 14.4kg / 0.92CUFT

Model No.	Input	Output	R&N	Effi.
SD-200B-5	19~36V	5V, 0~34.0A	100mV	79%
SD-200B-12	19~36V	12V, 0~16.7A	120mV	82%
SD-200B-24	19~36V	24V, 0~8.40A	150mV	85%
SD-200B-48	19~36V	48V, 0~4.20A	200mV	86%
SD-200C-5	36~72V	5V, 0~40.0A	100mV	81%
SD-200C-12	36~72V	12V, 0~16.7A	120mV	84%
SD-200C-24	36~72V	24V, 0~8.40A	150mV	86%
SD-200C-48	36~72V	48V, 0~4.20A	200mV	86%
SD-200D-5	72~144V	5V, 0~40.0A	100mV	82%
SD-200D-12	72~144V	12V, 0~16.7A	120mV	82%
SD-200D-24	72~144V	24V, 0~8.40A	150mV	84%
SD-200D-48	72~144V	48V, 0~4.20A	200mV	90%

DC/DC Converter

350~1000W Enclosed Single Output



350W Single Output DC-DC Converter

CBC

(D type)



CASE: 912B 215x 115x 50 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Over load / Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- 100% full load burn-in test
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V,
48V: 43~53V

Voltage tolerance ±2% (max.)

Overload protection 105%~135% shut off, re-power on to recover

Over voltage protection 110%~167% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -20~+60°C (refer to output derating curve)

Safety standards Meet LVD, EN60950-1 CB approved by TUV
(D type only)

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 1.1kg ; 12pcs / 14.4kg / 0.92CUFT

Model No.	Input	Output	R&N	Effi.
SD-350B-5	19~36V	5V, 0~57.0A	100mV	74%
SD-350B-12	19~36V	12V, 0~27.5A	120mV	80%
SD-350B-24	19~36V	24V, 0~14.6A	150mV	80%
SD-350B-48	19~36V	48V, 0~7.30A	200mV	84%
SD-350C-5	36~72V	5V, 0~60.0A	100mV	76%
SD-350C-12	36~72V	12V, 0~27.5A	120mV	81%
SD-350C-24	36~72V	24V, 0~14.6A	150mV	81%
SD-350C-48	36~72V	48V, 0~7.30A	200mV	82%
SD-350D-5	72~144V	5V, 0~60.0A	100mV	78%
SD-350D-12	72~144V	12V, 0~29.2A	120mV	83%
SD-350D-24	72~144V	24V, 0~14.6A	150mV	87%
SD-350D-48	72~144V	48V, 0~7.30A	200mV	89%

500W Single Output DC-DC Converter

CBC



CASE: 912A 215x 115x 50 mm

- 4:1 & 2:1 DC input range
- DC input active surge current limiting
- Protections: Short circuit / Overload / Over voltage / Over temp./ Input polarity
- 2000VAC I/O Isolation
- Forced air cooling by built-in DC fan with fan speed control function
- Output OK signal
- Built-in remote ON/OFF control
- Built-in remote sense function
- 3 years warranty

DC adjustment range 12V: 11~15V, 24V: 23~30V, 48V: 46~60V

Line regulation ±0.5% (max.)

Load regulation ±0.5% (max.)

Overload protection 105%~125% constant current limiting, shut off after 5 sec., re-power on to recover

Over voltage protection 130%~160% rated output voltage

Withstand voltage I/P-O/P: 2kV, I/P-FG: 1.5kV, 1 minute

Isolation resistance 100MΩ(min.) @500VDC

Working temperature -20~+60°C (refer to output derating curve)

Safety standards IEC60950-1 CB approved by TUV

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 1.15kg ; 12pcs / 14.8kg / 0.92CUFT

Model No.	Input	Output	R&N	Effi.
SD-500L-12	19~72V	12V, 0~40A	150mV	86%
SD-500L-24	19~72V	24V, 0~21A	150mV	88%
SD-500L-48	19~72V	48V, 0~10.5A	150mV	89%
SD-500H-12	72~144V	12V, 0~40A	150mV	87%
SD-500H-24	72~144V	24V, 0~21A	150mV	89%
SD-500H-48	72~144V	48V, 0~10.5A	150mV	90%

1000W Single Output DC-DC Converter

CBC

(D type)



CASE: 952B 295x 127x 41 mm

- 4:1 & 2:1 wide input range
- 2000VAC I/O Isolation
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- High power density 10.7W/inch³
- 1U low profile 41mm
- Output OK signal
- 12V / 0.25A auxiliary output
- Built-in remote ON/OFF control
- Built-in remote sense function
- 3 years warranty

DC adjustment range 12V: 11~15V, 24V: 23~30V, 48V: 46~60V

Line regulation ±0.5% (max.)

Load regulation ±0.5% (max.)

Overload protection 105%~125% constant current limiting, shut off after 5 sec., re-power on to recover

Over voltage protection 130%~160% rated output voltage

Withstand voltage I/P-O/P: 2kV, I/P-FG: 1.5kV, 1 minute

Isolation resistance 100MΩ(min.) @500VDC

Working temperature -20~+60°C (refer to output derating curve)

Safety standards IEC60950-1 CB approved by TUV

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8

Packing 1.94kg ; 6pcs / 12.6kg / 0.99CUFT

Model No.	Input	Output	R&N	Effi.
SD-1000L-12	19~72V	12V, 0~60A	150mV	84%
SD-1000L-24	19~72V	24V, 0~40A	150mV	88%
SD-1000L-48	19~72V	48V, 0~21A	150mV	90%
SD-1000H-12	72~144V	12V, 0~60A	150mV	85%
SD-1000H-24	72~144V	24V, 0~40A	150mV	89%
SD-1000H-48	72~144V	48V, 0~21A	150mV	92%

GSM90 Series
90W
Green Medical Adaptor

Under Development

- Universal AC input / Full range
- No load power consumption <0.1W
- Meet ErP step 2
- Meet EISA 2007(Energy Independence and Security Act)
- Class I power (with earth pin)
- 3 pole AC inlet IEC320-C14 (Desktop style)
- Fully enclosed plastic case
- Protections: Short circuit / Overload / Over voltage / Over temperature
- LED indicator for power on
- Pass LPS
- Design refer to IEC/EN60601-1, ANSI/AAMI ES60601-1
- Output models: 12V / 15V / 19V / 24V / 48V
- 3 years warranty

DC/DC Converter 100~300W Railway Single Output



Features

- Compliance to EN50155 railway standard
- 2:1 wide input range
- 4000VDC I/O isolation
- Protections:
 - Short circuit / Overload / Over voltage / Over temperature / Input reverse polarity
- Cooling by free air convection
- Built-in constant current limiting circuit
- 1U low profile
- All using 105°C long life electrolytic capacitors
- 100% full load burn-in test
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	RSD-100	RSD-150	RSD-200 NEW	RSD-300 NEW
Line regulation (max.)	±0.5%			
Load regulation (max.)	±1%			
Overload protection	Range Type	105%~135% Constant current limiting, recovers automatically after fault condition is removed		
Over voltage protection	115%~135%	Shut down O/P voltage, re-power on to recover		115%~140%
Withstand voltage	I/P - O/P: 4kVDC, I/P - FG: 2.5kVDC, O/P - FG: 2.5kVDC, 1 minute			
Isolation resistance	100MΩ(min.) @500VDC			
Working temperature	-40~+70°C (refer to output derating curve)			
Safety standards	Meet IEC60950-1(LVD)			
EMC standards	EN55022 class B, EN50121-3-2, EN61000-4-2,3,4,5,6,8			
Railway standard	EN50155 / IEC60571			
Dimension (LxWxH)(mm)	161x 68x 36	189x 77x 36	191x 86x 40	216x 97x 40
Packing	24pcs / 15.4kg	15pcs / 13kg	12pcs / 12.3kg	12pcs / 15.3kg

100W

RSD-100

Model No.	Input	Output	R&N	Effi.
RSD-100B-5	14.4~33.6V	5V, 0~20A	100mV	88.0%
RSD-100B-12	14.4~33.6V	12V, 0~8.4A	120mV	89.0%
RSD-100B-24	14.4~33.6V	24V, 0~4.2A	150mV	89.0%
RSD-100C-5	28.8~67.2V	5V, 0~20A	100mV	89.0%
RSD-100C-12	28.8~67.2V	12V, 0~8.4A	120mV	91.0%
RSD-100C-24	28.8~67.2V	24V, 0~4.2A	150mV	91.0%
RSD-100D-5	57.6~154V	5V, 0~20A	100mV	89.5%
RSD-100D-12	57.6~154V	12V, 0~8.4A	120mV	91.0%
RSD-100D-24	57.6~154V	24V, 0~4.2A	150mV	90.0%

150W

RSD-150

Model No.	Input	Output	R&N	Effi.
RSD-150B-5	14.4~33.6V	5V, 0~30A	100mV	89%
RSD-150B-12	14.4~33.6V	12V, 0~12.5A	120mV	90%
RSD-150B-24	14.4~33.6V	24V, 0~6.3A	150mV	90%
RSD-150C-5	28.8~67.2V	5V, 0~30A	100mV	90%
RSD-150C-12	28.8~67.2V	12V, 0~12.5A	120mV	92%
RSD-150C-24	28.8~67.2V	24V, 0~6.3A	150mV	91%
RSD-150D-5	57.6~154V	5V, 0~30A	100mV	90%
RSD-150D-12	57.6~154V	12V, 0~12.5A	120mV	92%
RSD-150D-24	57.6~154V	24V, 0~6.3A	150mV	91%

200W

NEW RSD-200

Model No.	Input	Output	R&N	Effi.
RSD-200B-12	14.4~33.6V	12V, 0~16.7A	120mV	89%
RSD-200B-24	14.4~33.6V	24V, 0~8.4A	150mV	89%
RSD-200B-48	14.4~33.6V	48V, 0~4.2A	180mV	89%
RSD-200C-12	28.8~67.2V	12V, 0~16.7A	120mV	91%
RSD-200C-24	28.8~67.2V	24V, 0~8.4A	150mV	91%

Model No.	Input	Output	R&N	Effi.
RSD-200C-48	28.8~67.2V	48V, 0~4.2A	180mV	91%
RSD-200D-12	57.6~154V	12V, 0~16.7A	120mV	91%
RSD-200D-24	57.6~154V	24V, 0~8.4A	150mV	91%
RSD-200D-48	57.6~154V	48V, 0~4.2A	180mV	91%

300W

NEW RSD-300

Model No.	Input	Output	R&N	Effi.
RSD-300B-5	14.4~33.6V	5V, 0~42A	100mV	87%
RSD-300B-12	14.4~33.6V	12V, 0~22.5A	120mV	89%
RSD-300B-24	14.4~33.6V	24V, 0~11.3A	150mV	90%
RSD-300B-48	14.4~33.6V	48V, 0~5.7A	180mV	90%
RSD-300C-5	28.8~67.2V	5V, 0~42A	100mV	89%
RSD-300C-12	28.8~67.2V	12V, 0~25A	120mV	91%
RSD-300C-24	28.8~67.2V	24V, 0~12.5A	150mV	91%
RSD-300C-48	28.8~67.2V	48V, 0~6.3A	180mV	91%
RSD-300D-5	57.6~154V	5V, 0~42A	100mV	89%
RSD-300D-12	57.6~154V	12V, 0~25A	120mV	91%
RSD-300D-24	57.6~154V	24V, 0~12.5A	150mV	91%
RSD-300D-48	57.6~154V	48V, 0~6.3A	180mV	91%
RSD-300E-5	21.6~50.4V	5V, 0~42A	100mV	88%
RSD-300E-12	21.6~50.4V	12V, 0~25A	120mV	90%
RSD-300E-24	21.6~50.4V	24V, 0~12.5A	150mV	90%
RSD-300E-48	21.6~50.4V	48V, 0~6.3A	180mV	90%
RSD-300F-5	43.2~100.8V	5V, 0~42A	100mV	89%
RSD-300F-12	43.2~100.8V	12V, 0~25A	120mV	91%
RSD-300F-24	43.2~100.8V	24V, 0~12.5A	150mV	91%
RSD-300F-48	43.2~100.8V	48V, 0~6.3A	180mV	91%

19" Rack Power

1000~18000W Single Output



1000W 1U Rack Power System

- Universal AC input / Full range
- Built-in 5V/0.3A standby power
- Built-in active PFC function
- Protections: Short circuit / Overload
Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- High power density 10.7W/inch³
- 1U low profile: 44mm
- Output voltage can be trimmed between 90% ~ 110% of the rated output voltage
- Active current sharing up to 3000W (3 units) in one 19" rack, 3 racks max. can be operated in parallel (up to 8 units)
- Remote control for single unit
- Built-in remote sense function
- Hot-swap operation
- Internal OR-ing diode
- AC OK and DC OK signal output
- Optional I²C serial data bus
- 3 years warranty



RCP-1000



CASE: 952A
295x 127x 41 mm

RCP-1U



350.8x 483.6x 44 mm

AC input voltage range 90~264VAC
DC adjustment range ±3% rated output voltage
Overload protection 105%~125% constant current limiting, auto-recovery
Over voltage protection 110%~135% rated output voltage
Setup, rise, hold up time 1000ms, 60ms, 16ms at full load and 230VAC
Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
Working temperature -20~+50°C@100%, 60°C@60%
Safety standards UL60950-1, TUV EN60950-1 approved
EMC standards EN55022 Class B, EN61204-3, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 heavy industry level
Packing 1.91kg (single unit of RCP-1000)
12.3kg (empty rack)

Model No.	Output	Tol.	R&N	Effi.
RCP-1000-12	12V, 0~60A	±1%	150mV	81%
RCP-1000-24	24V, 0~40A	±1%	200mV	87%
RCP-1000-48	48V, 0~21A	±1%	300mV	89%

RCP-1U □ 19" 1U rack for RCP-1000 series
□=I: AC inlet ; T: terminal block

Control and Monitor Unit for RCP-1000

- 1U low profile
- 19-inch rack mounting
- I²C decoder, control and monitor up to 3 RCP-1000-□-C units
- Suitable for all kinds of RCP-1000 output (12V,24V,48V)
- Digital meters for output voltage, output current, and internal temperature on front panel
- Potentiometer for adjusting output voltage of RCP-1000 unit on front panel
- Relay contacts and LED indicators for AC fail, DC fail, and over temperature warning
- Removable fixing accessory
- 3 years warranty



440x 68x 44 mm

AC input voltage range ... 90~264VAC
AC inrush current Cold start, 30A at 115VAC, 50A at 230VAC
Relay contact rating 30VDC, 1A
Working temperature -20~+60°C (refer to output derating curve)
Safety standards Design refer to UL60950-1, TUV EN60950-1
Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, O/P-FG:0.5kVAC
Isolation resistance I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC
EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Connection Screw DIN terminal for AC input and relay contact output; D-Type right angle 25 positions for communication port

Model No.	Application
RCP-MU	Control and monitor RCP-1000 series

2000W 1U Rack Power System

- Universal AC input / Full range
- Withstand 300VAC surge for 5 secs.
- Built-in 5V/0.3A, 12V/0.8A auxiliary power
- Built-in active PFC function
- Protections:
Short circuit / Overload / Over voltage
Input under voltage / Over temp.
- Forced air cooling by built-in DC fan
- Internal OR-ing FET
- High power density 21.4W/inch³
- 1U low profile: 44mm
- Active current sharing up to 6000W (3 units) in one 19" rack, 3 racks max. can be operated in parallel (up to 9 units)
- Remote control for single unit
- Built-in remote sense function
- Hot-swap operation
- PMBus serial communication
- AC OK and DC OK signal, fan fail, OTP alarm signal
- 3 years warranty



RCP-2000



CASE: 974A
295x 127x 41 mm

RKP-1U



350.8x 483.6x 44 mm

AC input voltage range 90~264VAC
DC adjustment range -12%~+15% rated output voltage
Overload protection 105%~125% constant current limiting, shut off after 5 sec., re-power on to recover
Over voltage protection 120%~145% rated output voltage
Setup, rise, hold up time 1500ms, 60ms, 10ms at full load and 230VAC
Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
Working temperature -40~+70°C(refer to output derating curve)
Safety standards UL60950-1, TUV EN60950-1 approved
EMC standards EN55022 Class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 heavy industry level
Packing 2kg(single unit of RCP-2000)
11.5kg (empty rack)

Model No.	Output	Tol.	R&N	Effi.
RCP-2000-12	12V, 0~100A	±2%	150mV	86.0%
RCP-2000-24	24V, 0~80A	±1%	200mV	90.5%
RCP-2000-48	48V, 0~42A	±1%	300mV	92.0%

RKP-1U □ 19" 1U rack for RCP-2000 Series;
□=I: AC inlet; T: terminal block

Control and Monitor Unit for RCP-2000

- 1U low profile
- 19-inch rack mounting
- Control and monitor up to 32 RCP-2000 units
- Front panel LCD and buttons for on-site service without PC
- Alarm/event log with time and date
- Easy wire connections on rear side
- Windows-based PC communication software
- USB, RS-232 or Ethernet interface for PC connection locally or remote monitoring and control via GSM modem
- 4 user programmable relay outputs for traditional remote or warning
- 3 years warranty



147.5x 127x 41 mm

RKP-1U-CMU1



350.8x 486.6x 44 mm

DC input voltage range 12~15VDC
DC input current 1A at 12VDC, 0.8A at 15VDC
Output relay contact 4 user programmable relay
Working temperature -25~+70°C (refer to output derating curve)
Safety standards UL60950-1, TUV EN60950-1 approved for RKP-1U-CMU1
Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC
Isolation resistance I/P-O/P, I/P-FG: 100M Ohms / 500VDC
EMC standards EN55022 Class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-1 light industry level

Model No.	Application
RKP-CMU1	Control and monitor RCP-2000 series (single unit of RKP-CMU1)
RKP-1U-CMU1	Control and monitor RCP-2000 series (19" rack with RKP-CMU1)



After 6 years of endeavor to develop LED power supplies for various LED applications, MEAN WELL's LED power family has become the second largest product line. In order to make users easily get the product information they need and considering the sales channel might be different, we split LED power family from this catalog and put the product information on a separate LED catalog. Please contact with our sales representative to request for our new LED catalog or visit our website: www.meanwell.com/product/led/led.html.



HLG/HLG-C series 40W~320W

- 95% high efficiency / PFC / IP65~67 / 277VAC / 4kV surge / 3-in-1 dimming(B-type)
- C.C. output with high output voltage >60VDC for HLG-C series
- Suitable for LED street lighting, outdoor LED lighting, LED display



PLN/HLN series 20W~96W

- 91% high efficiency
- PFC / 277VAC / IP64 / Class 2 / 3-in-1 dimming (HLN-B type)
- Suitable for indoor LED lighting



CLG series 60W~150W

- 91% high efficiency / PFC / IP65~67 / 277VAC / 4kV surge
- Suitable for LED street lighting, outdoor LED lighting, LED display



PLC series 30W~96W

- 89% high efficiency / PFC / Class 2
- Suitable for indoor LED lighting
- Screw terminal style of I/O



CEN series 60W~96W

- 91% high efficiency / PFC / IP66 / 277VAC / 4kV surge / Class 2
- Suitable for LED street lighting and outdoor LED lighting



LPF series 16W~90W

- 91% high efficiency / PFC / IP67 / 277VAC / Class II input / 3-in-1 dimming(D-type) / Class 2
- Suitable for indoor LED lighting, LED display



HVG/HVGC series 100W~150W

- Wide input range: 180~480VAC / 100W, 180~528VAC / 150W
- 91% high efficiency / PFC / IP65~67 / 3-in-1 dimming (B-type)
- Suitable for outdoor LED lighting and street lighting



LP series 18W~100W

- IP67 / Class II input / Class 2 (18~60W)
- Suitable for LED-based decorative and architectural lighting, LED display



HSG series 70W

- Rectangular metal case
- PFC / IP65 / 277VAC / Class 2
- Suitable for outdoor LED lighting



APV/APC series 12W~35W

- Class II input / Class 2
- Constant voltage design(C.V. mode) for APV series
- Constant current design(C.C. mode) for APC series
- Low cost, suitable for indoor LED lighting, LED display



LCM series 40W~60W

- 90% high efficiency / PFC / 180~295VAC / Plastic case
- Multiple stage C.C. level selectable by DIP S.W.
- Dimming function: 0~10VDC / PWM / DALI interface / Push dimming
- Suitable for indoor LED lighting applications



PCD/PLD series 16W~60W

- PFC / AC phase-cut dimming / Work with leading edge and trailing edge TRIAC dimmers
- Non AC dimming for PLD-16/25/40/60
- Suitable for indoor LED lighting



PLP/HLP series 20W~80W

- PFC / PCB type / 277VAC / Class 2 / 3-in-1 dimming (HLP)
- Suitable for LED lighting (built-in type)



LDD series DC/DC constant LED driver

- 300 / 350 / 500 / 600 / 700 / 1000mA
- High efficiency up to 97%
- EN55015 and FCC compliance
- Pin, wire, or SMD style for choice

Inverter Power Solution

MEAN WELL provides full range of DC/AC inverter from 100W~3000W with various options to fulfill the growth of alternative energy related applications. This product family includes solar inverter, true sine wave inverter, and modified sine wave inverter, which are highly efficient, energy-saving, low power consumption, and approved by global safety/EMC certificates per UL, E-mark, CE, and FCC. Considering the sales channel might be different, we split the inverter power family from this catalog and put the product information on a separate Inverter catalog. Please contact with our sales representative for our new Inverter catalog or visit our website: www.meanwell.com/product/inverter/inverter01.html.



Modified Sine Wave

A301 / A302 series 100~2500W

- High frequency design
- Input and output fully isolation
- Low power consumption (standby)
- Optional remote ON/OFF control for 1000~2500W
- Built-in USB interface and without fan for 100W



True Sine Wave

TS series 200~3000W

- 2 times high surge power for motor related applications
- Advanced digital control by microprocessor
- High efficiency up to 92%
- Low THD
- Standby saving mode to conserve energy for 700~3000W



Stand-alone Solar Inverter

ISI-500 series 500W

- DC/AC modified sine wave output
- Built-in MPPT solar charger
- High frequency design
- High surge power up to 1000W
- High efficiency up to 88%



True Sine Wave with Solar Charger Function


TN series 1500~3000W

- 2 times high surge power for motor related applications
- Advanced digital control by microprocessor
- Selectable UPS & energy saving mode
- AC bypass / Built-in AC and solar charger
- Low THD, fast transfer time
- Optional monitoring software and connection cable




Case Drawing


■ 901

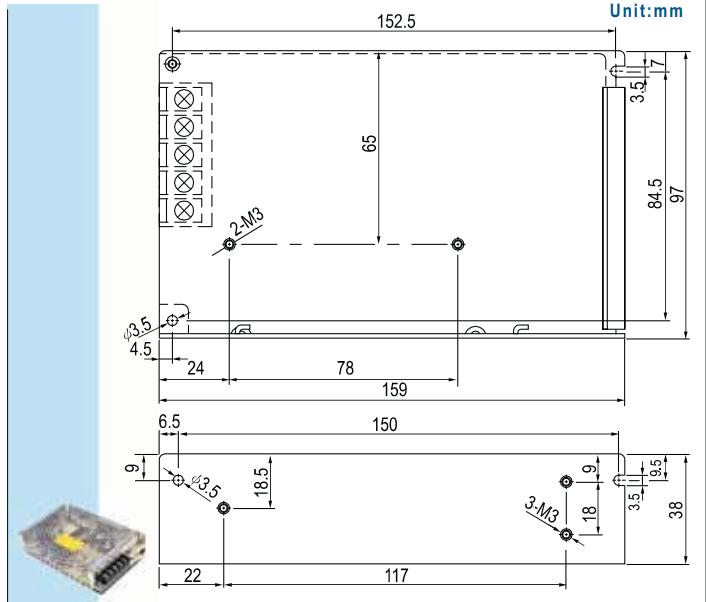


■ 905

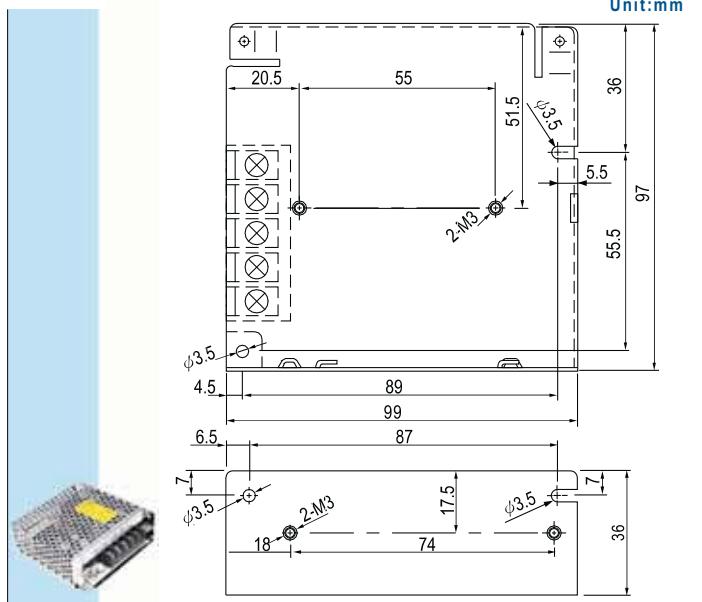


■ 902

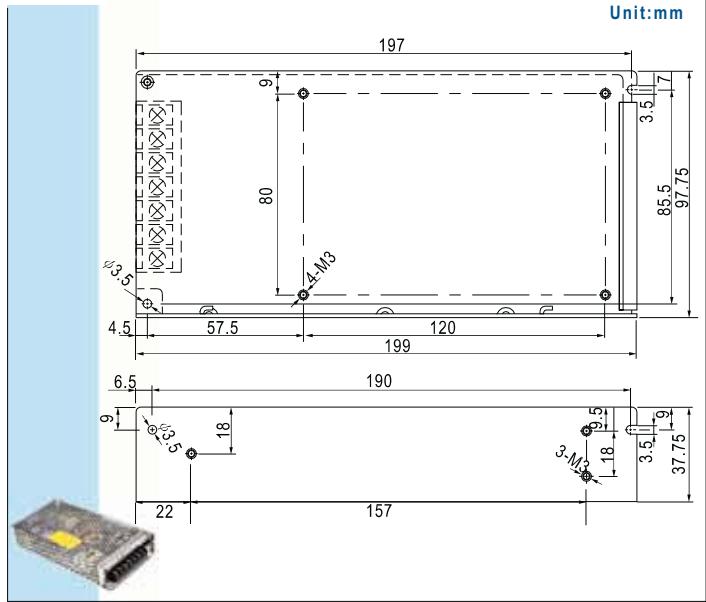


906

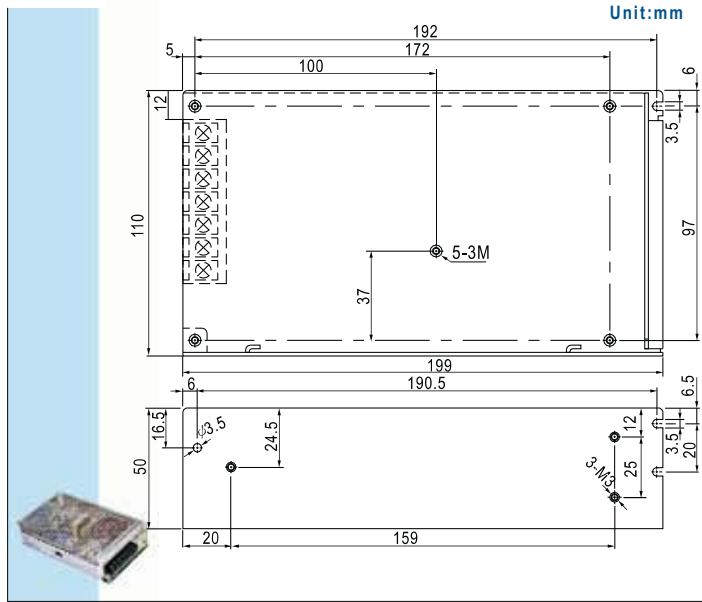









903

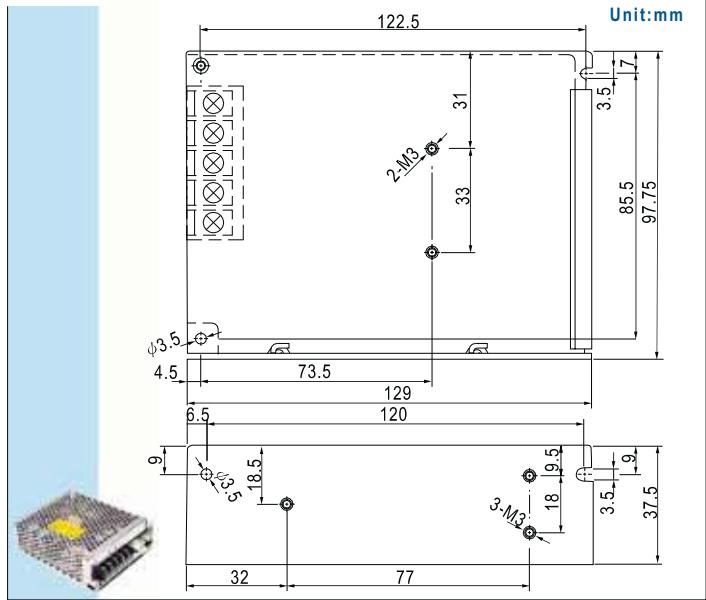







907

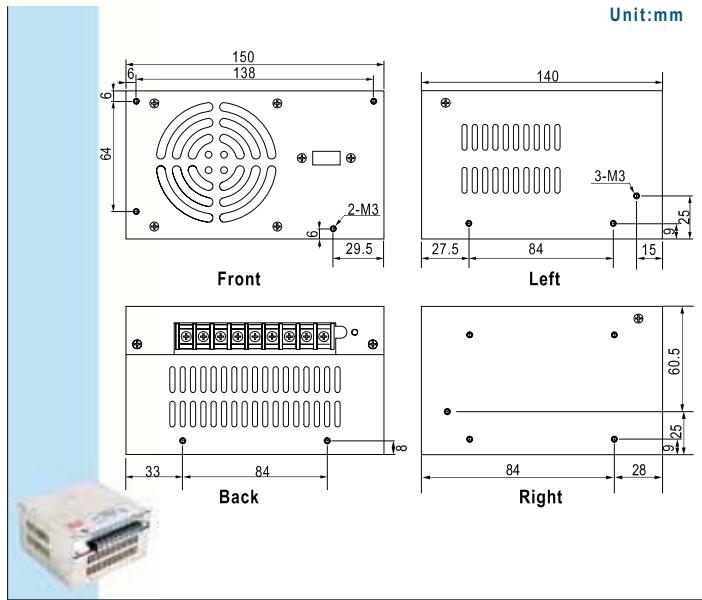

Case Drawing

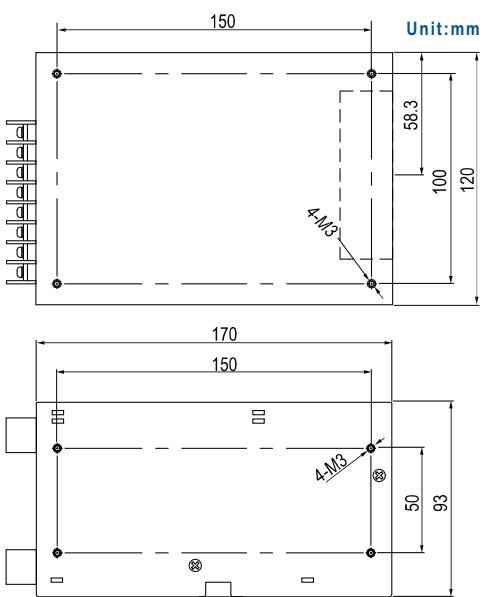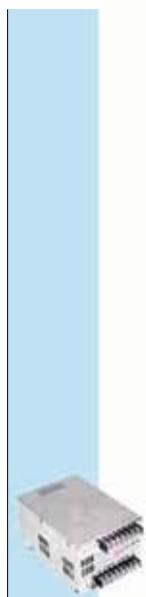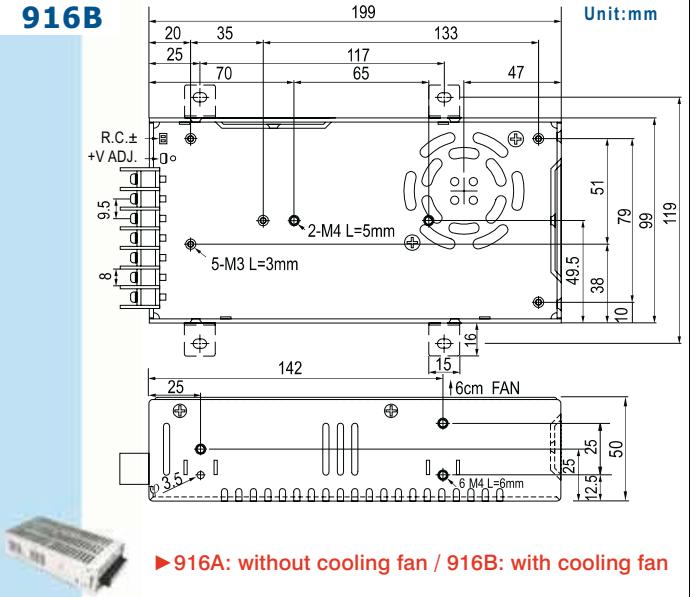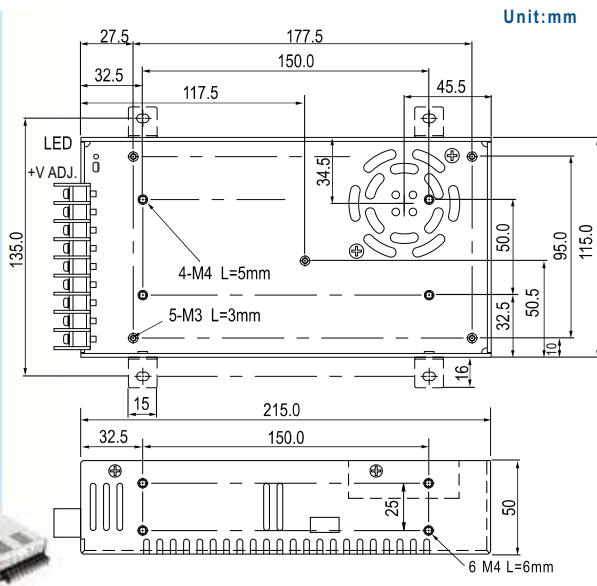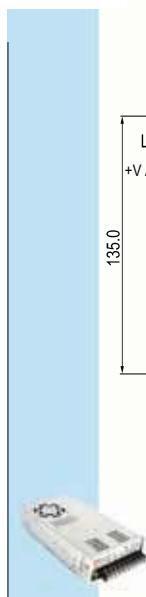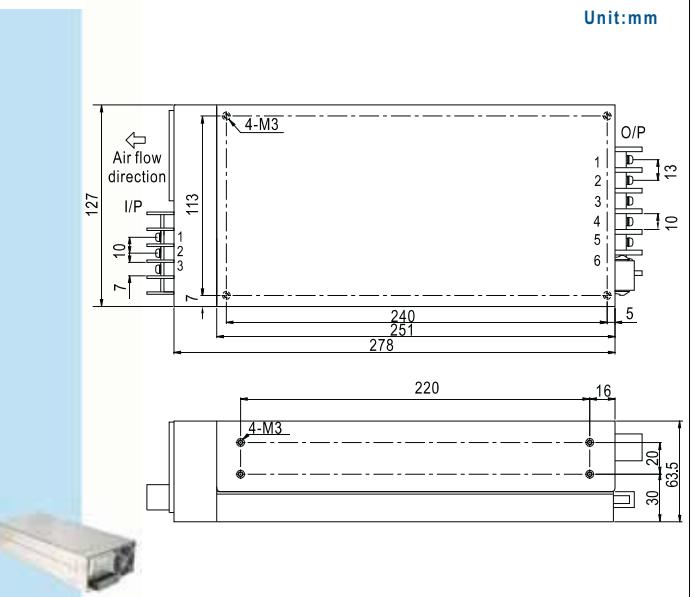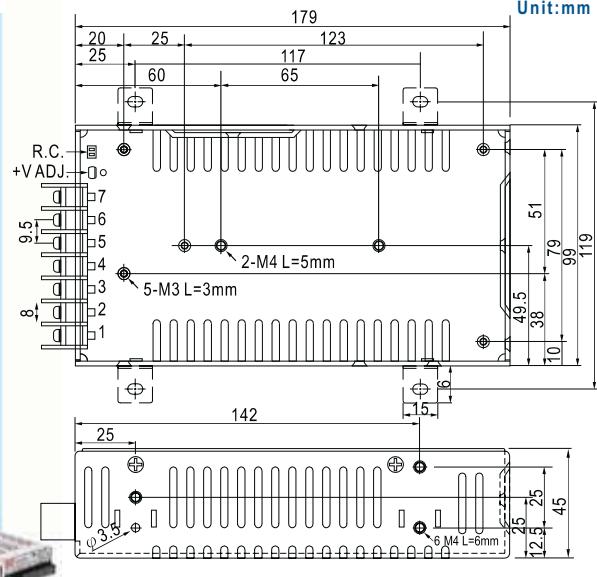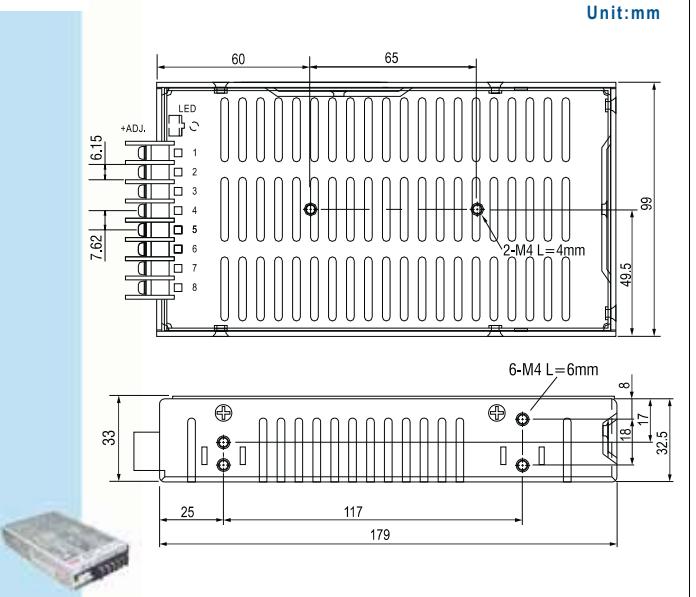910A

**916A
916B**

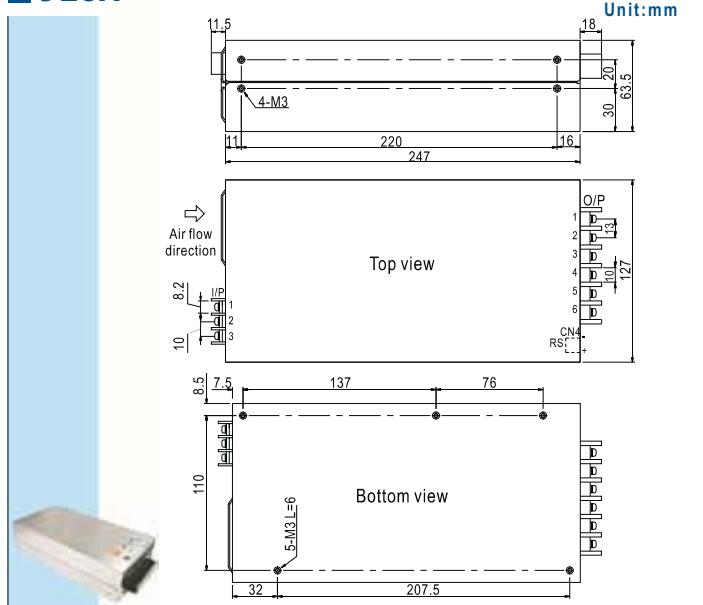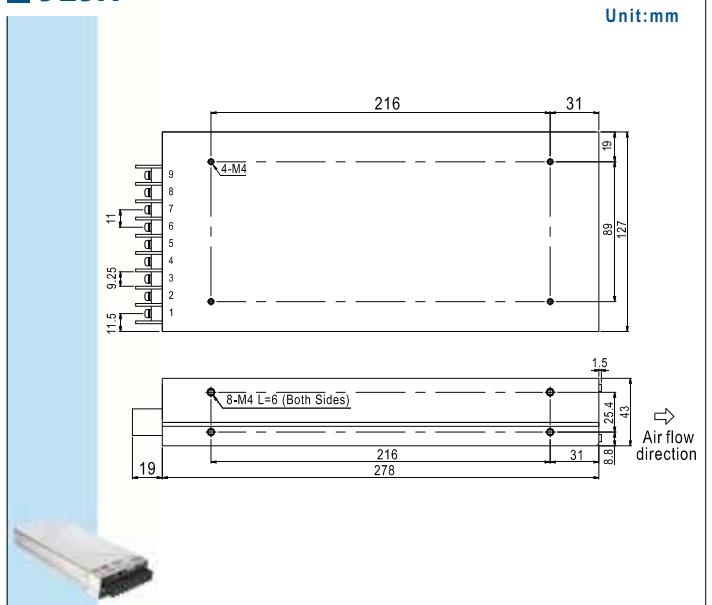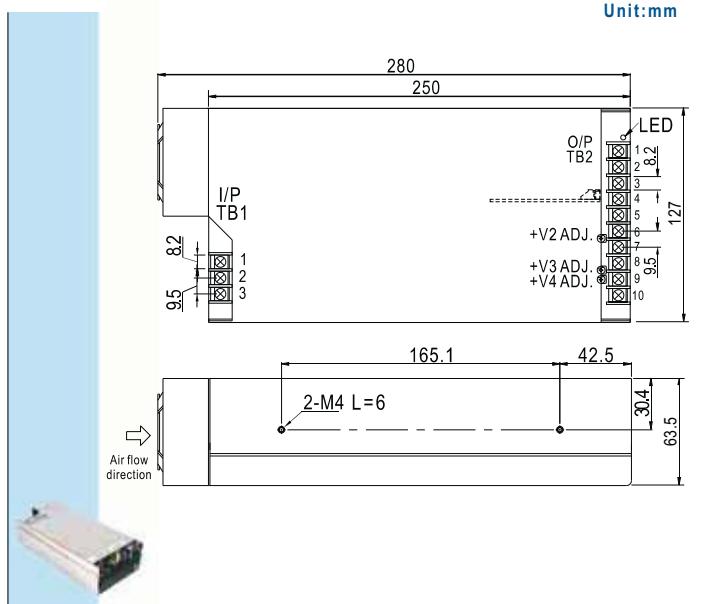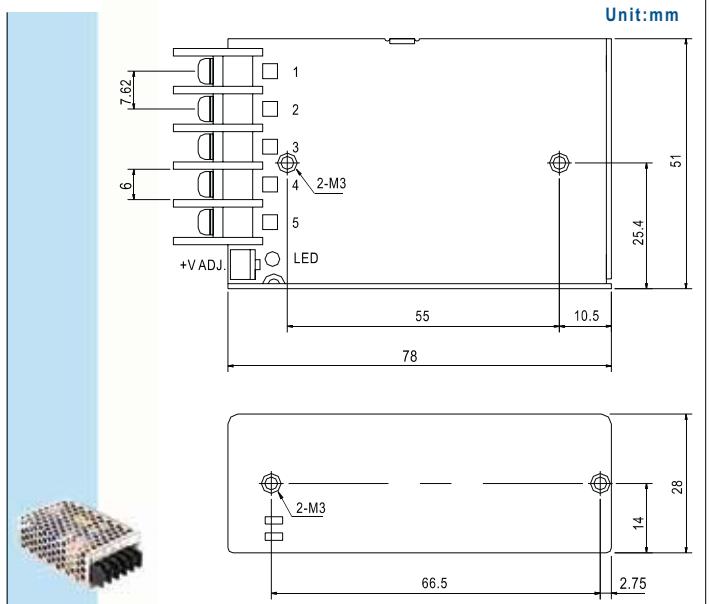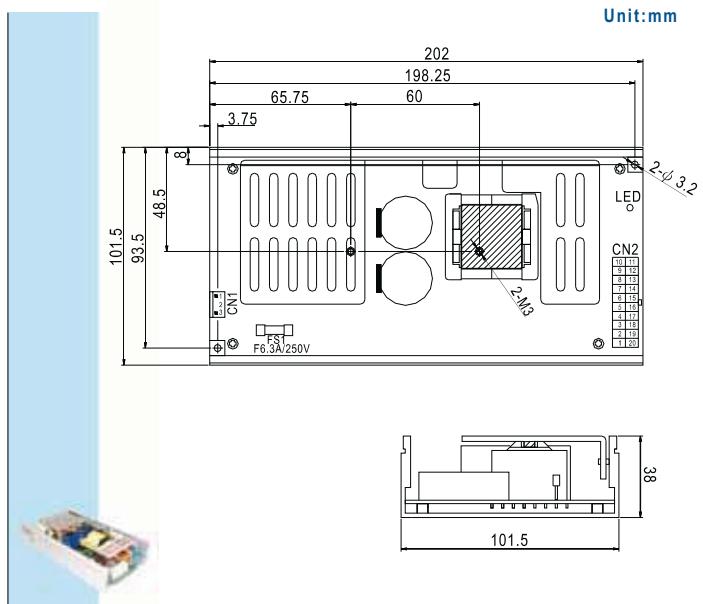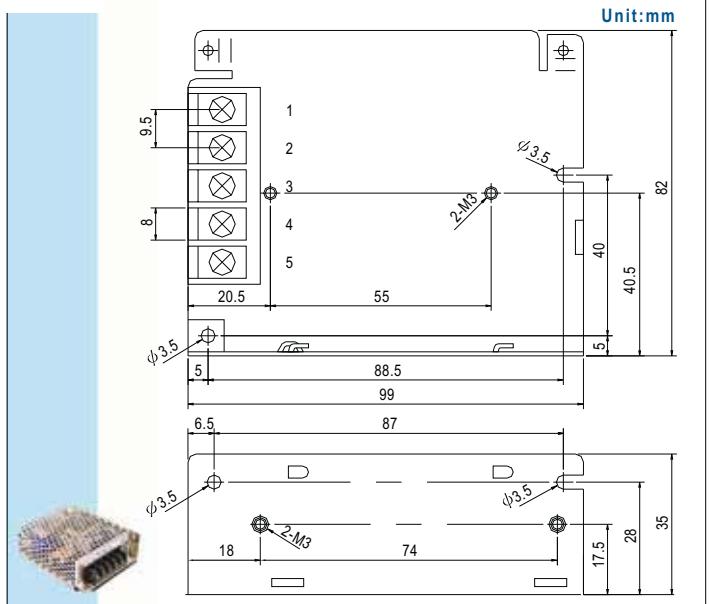912

919A

915A

920A


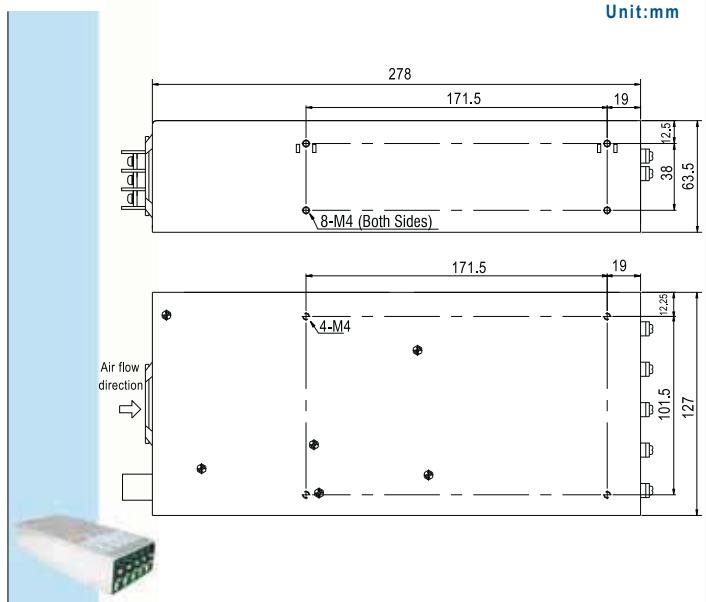
Case Drawing

926A

929A

927A

931A

928A

932A


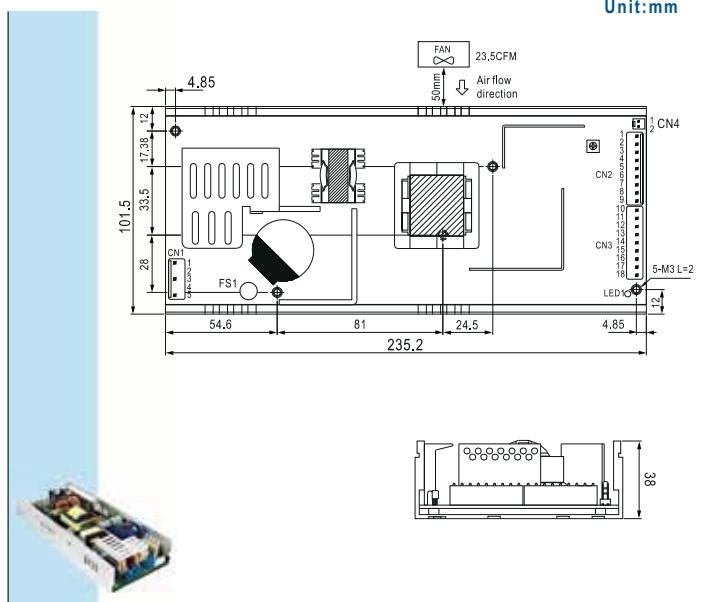
Case Drawing




935A




941B




939A

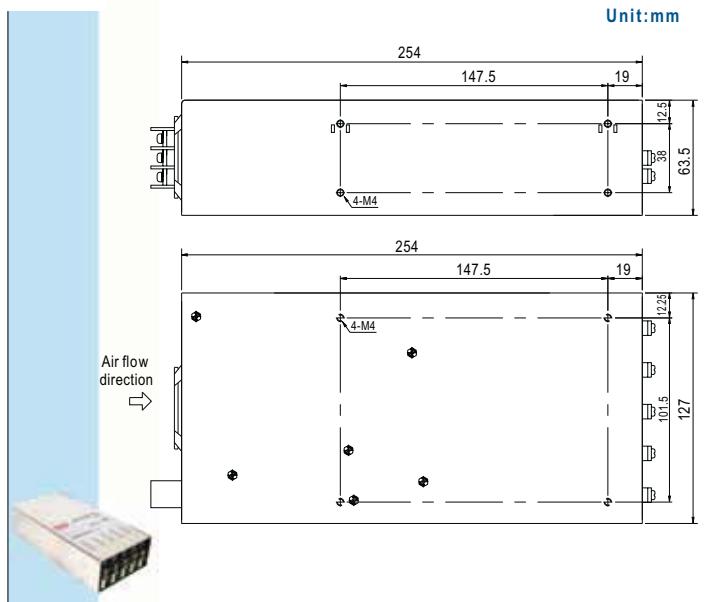


943A

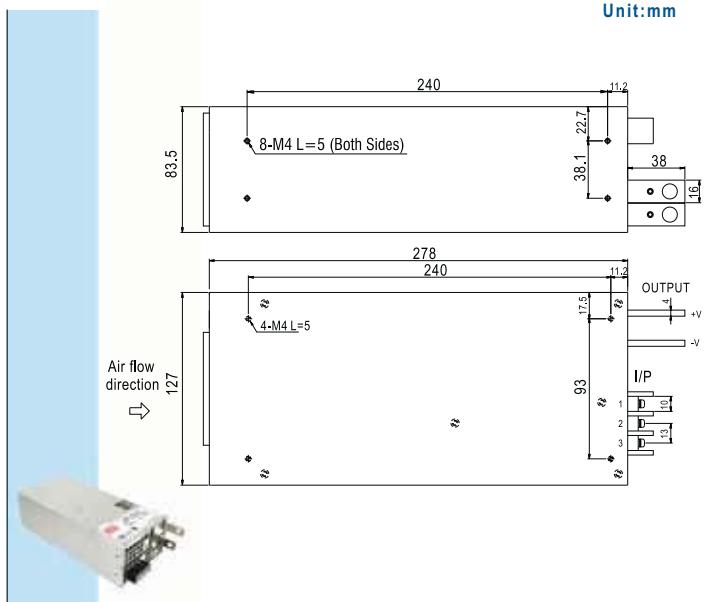

940A

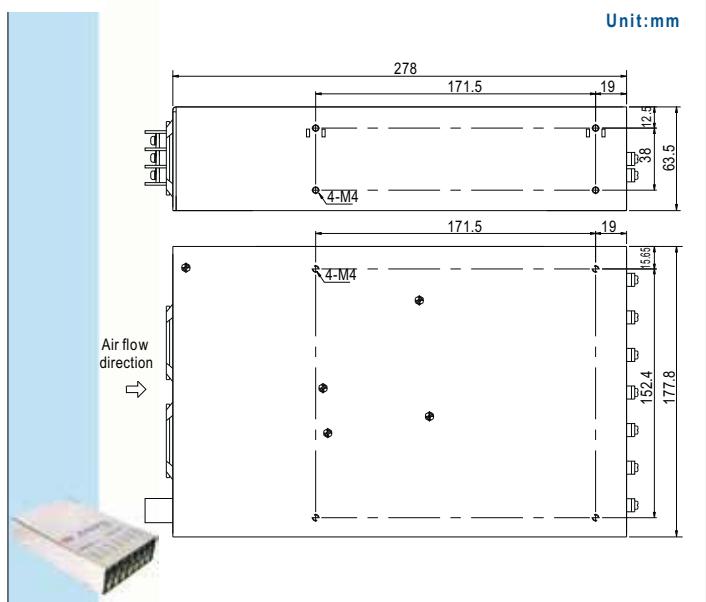


946A

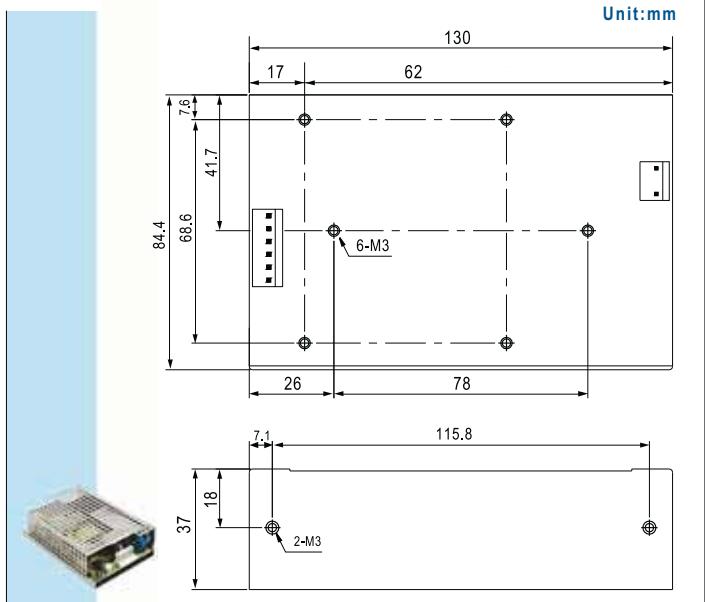


Case Drawing


■ 952B

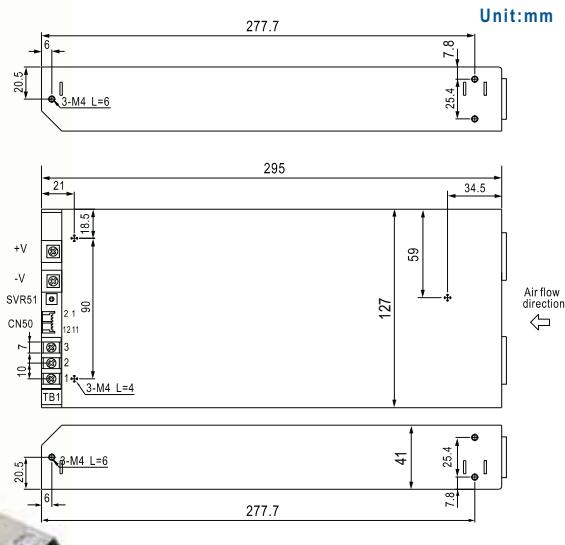


■ 977A

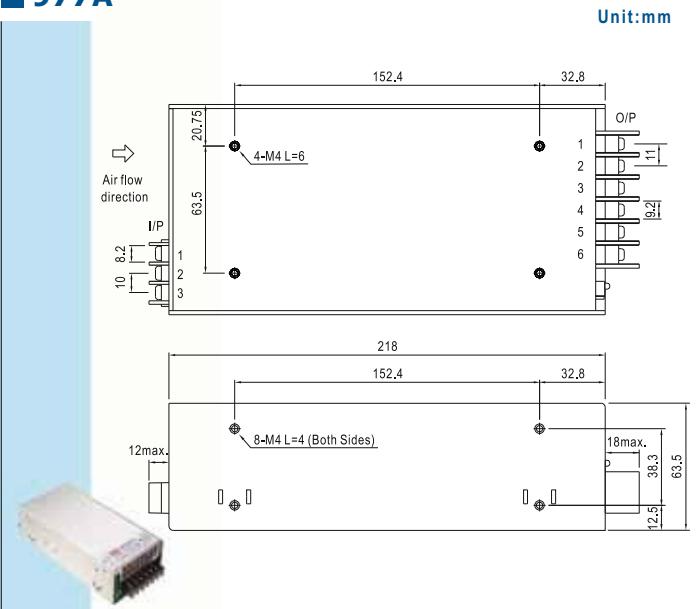


■ 963A

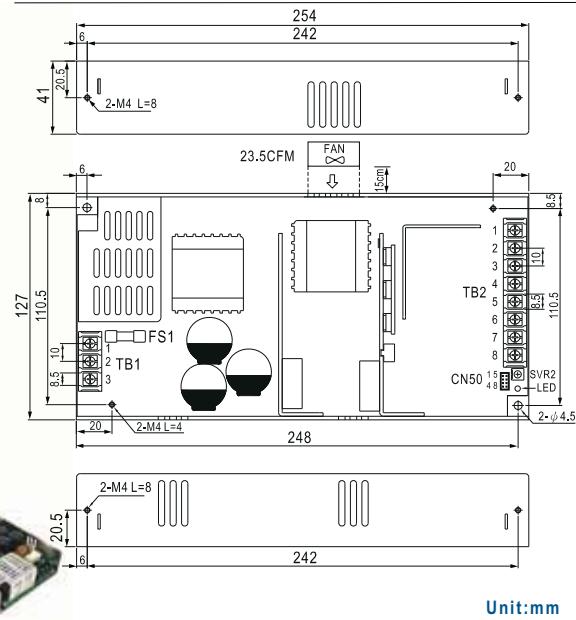


■ 978A

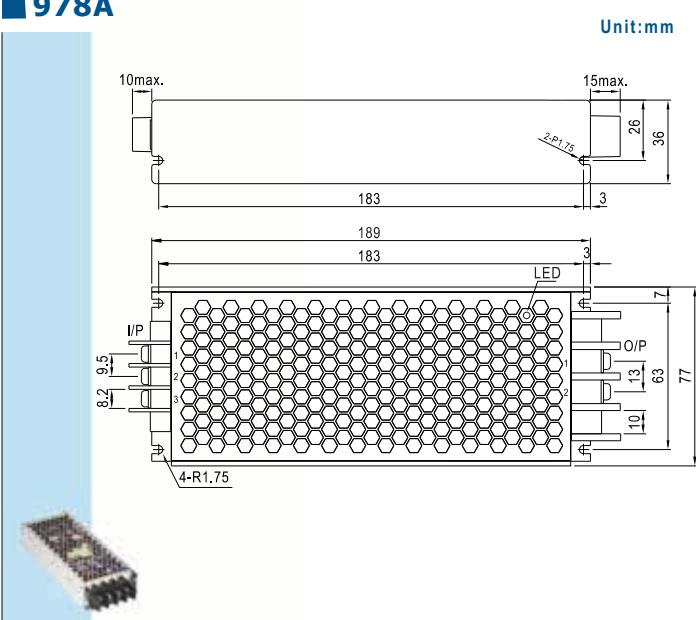

■ 971A

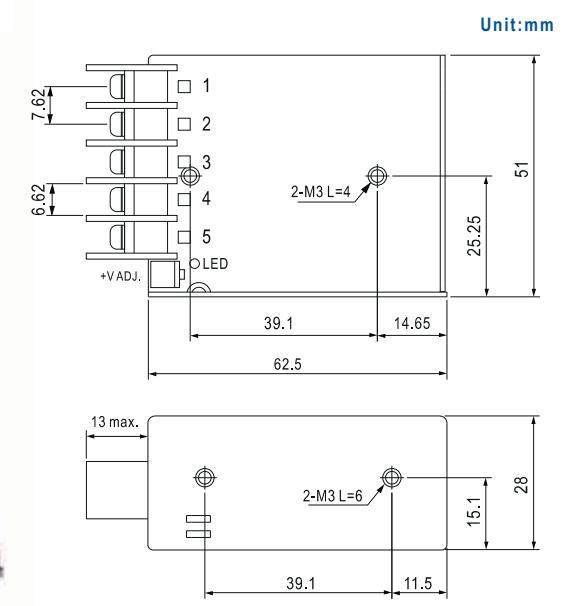


■ 980A

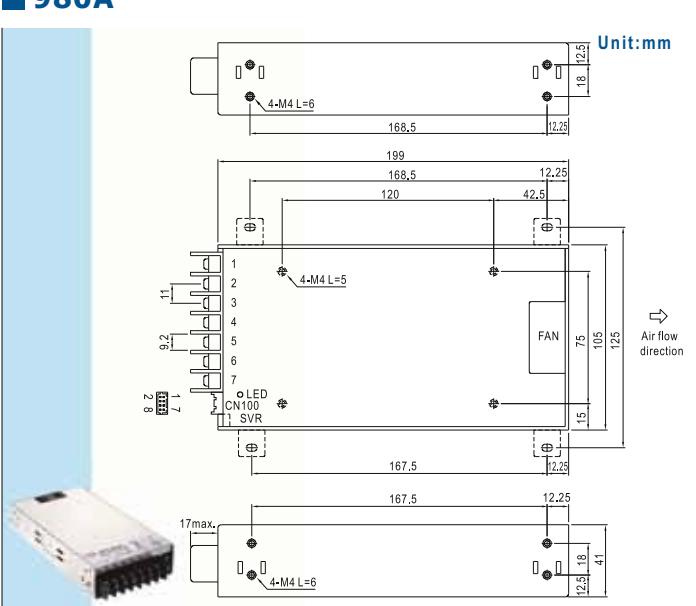


Case Drawing


■ 986A

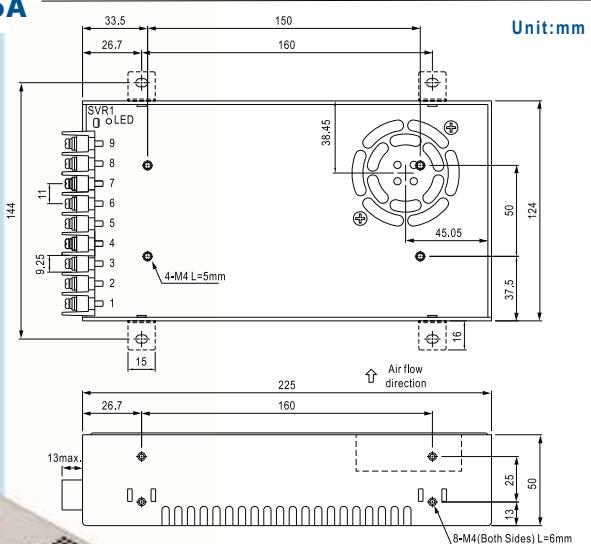


■ 995A

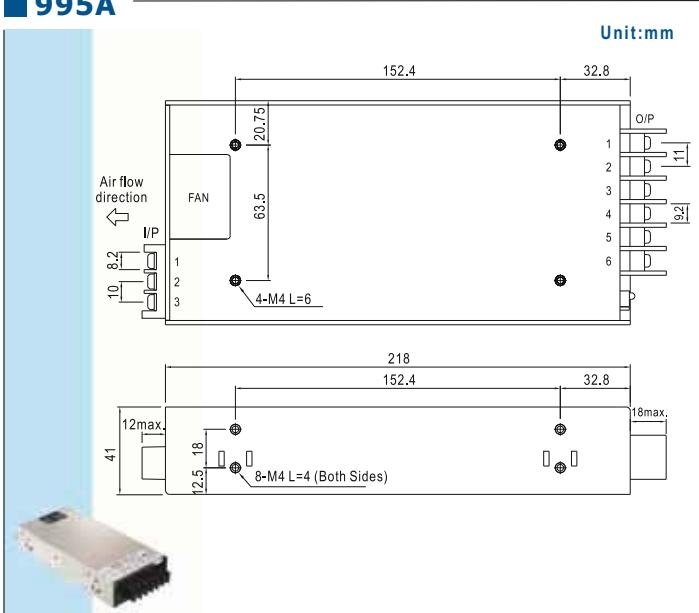


■ 987A

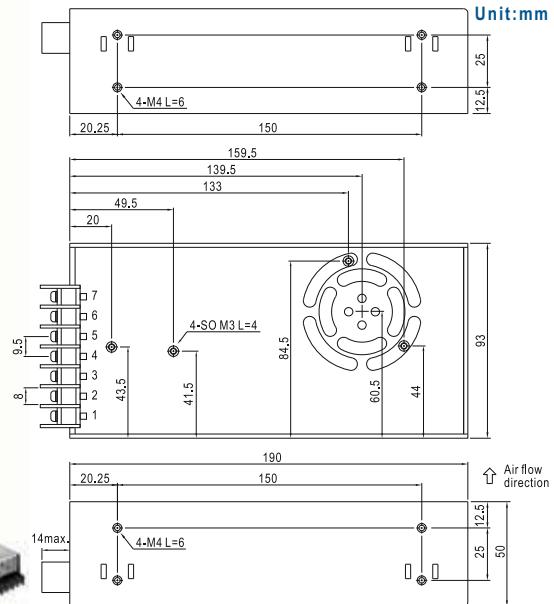


■ 996A

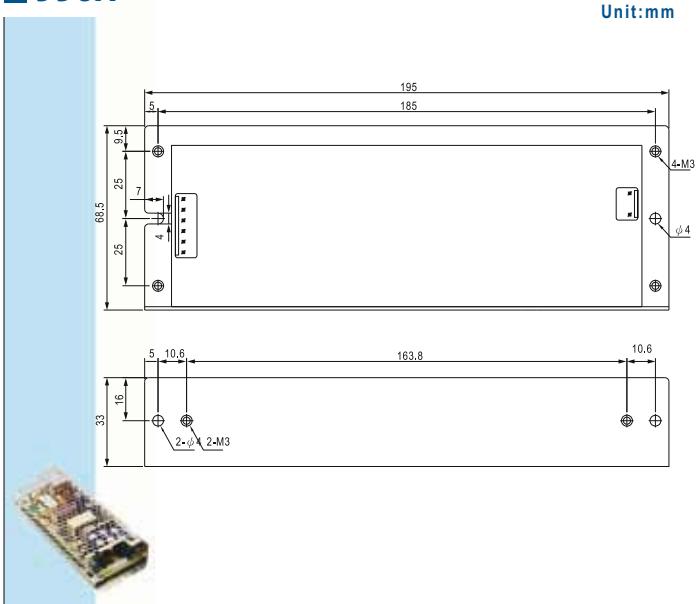







■ 988

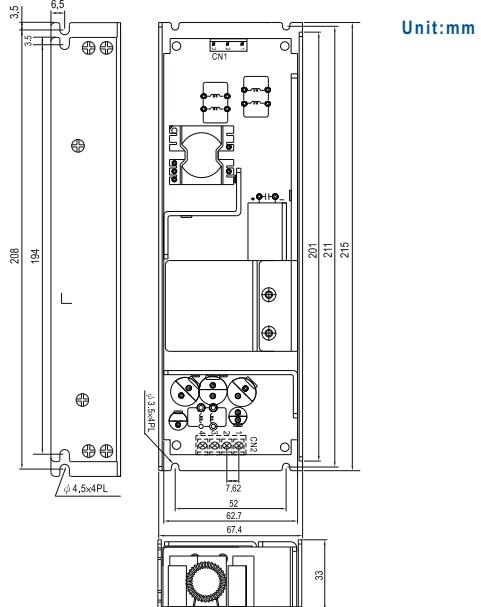

■ 998A

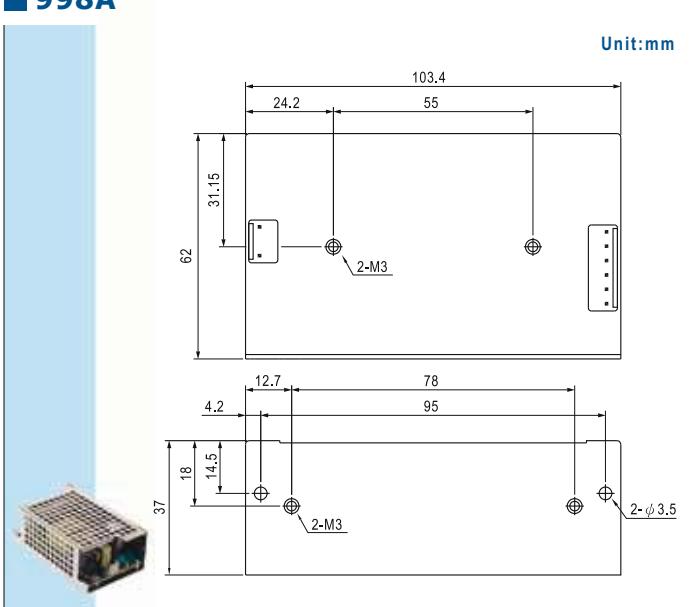


Case Drawing

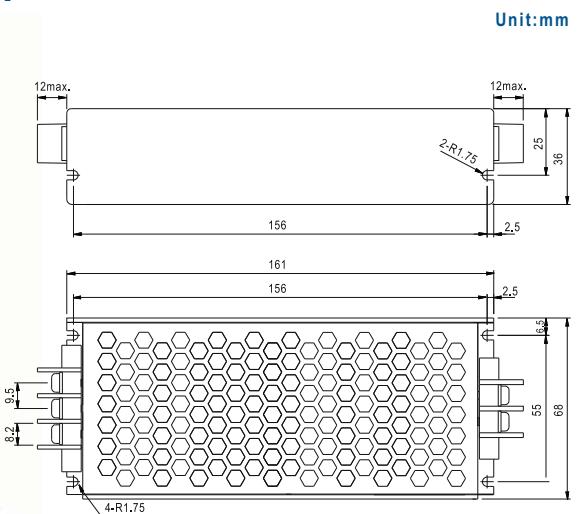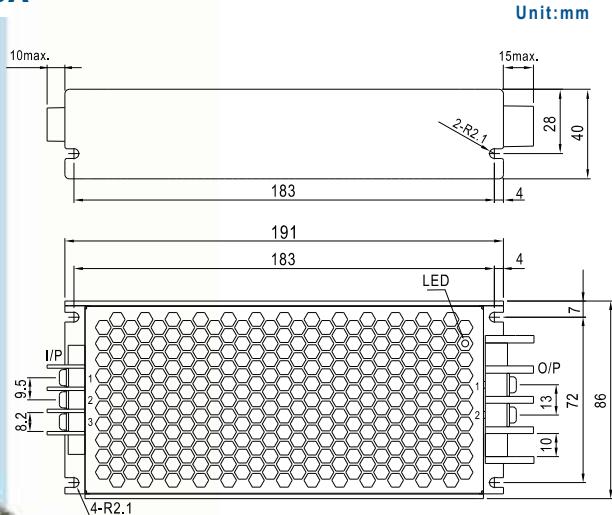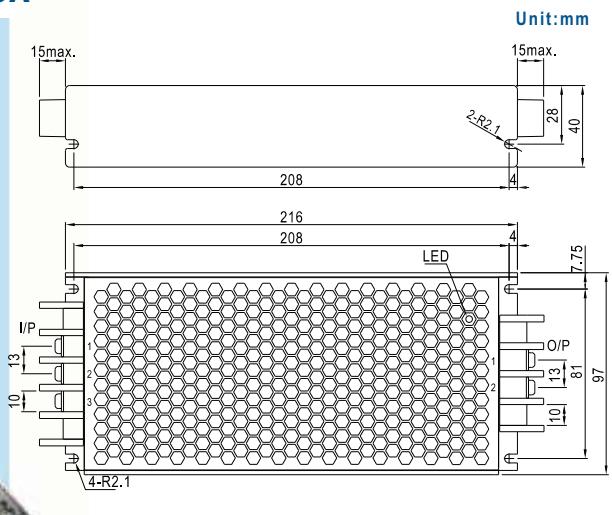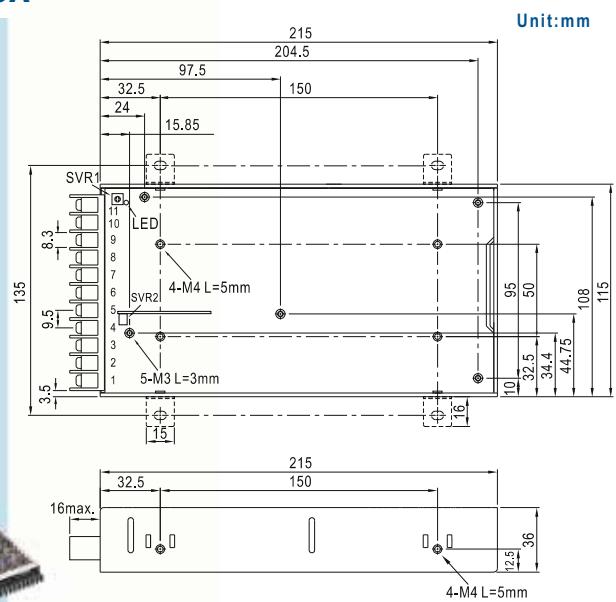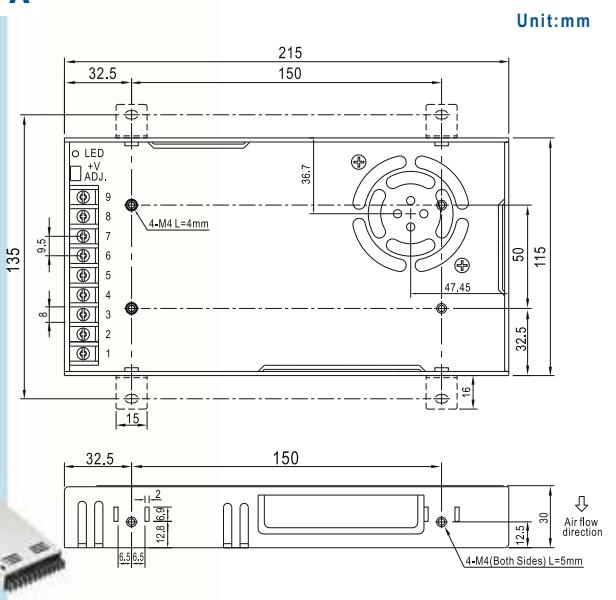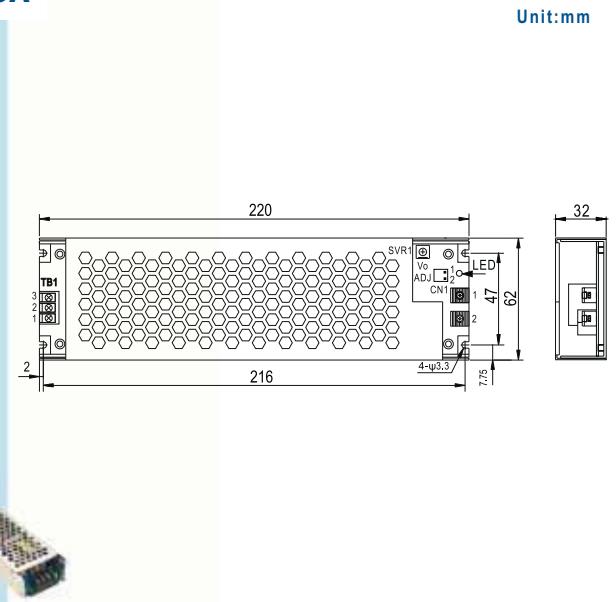
■ 999A

■ 203A

■ 205A

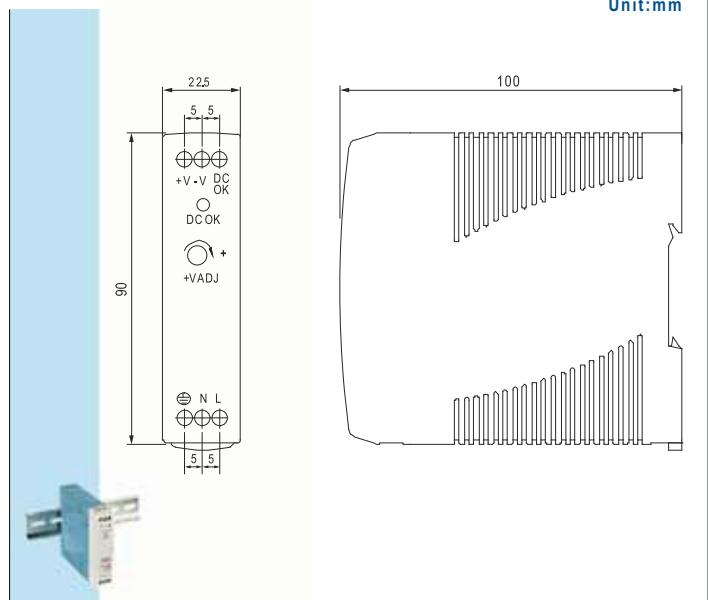■ 206A

■ 207A

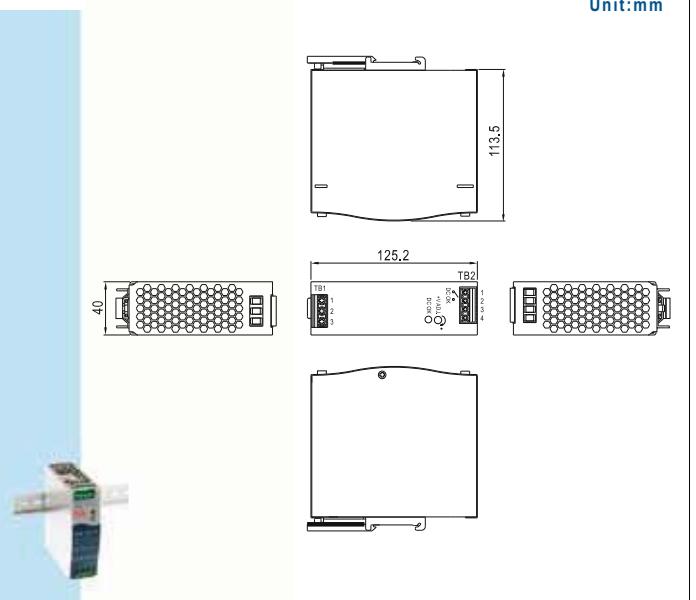■ 208A


Case Drawing


■ 956 (MDR-10/20)




■ 992A (SDR-120)




■ 962A (MDR-40/60)

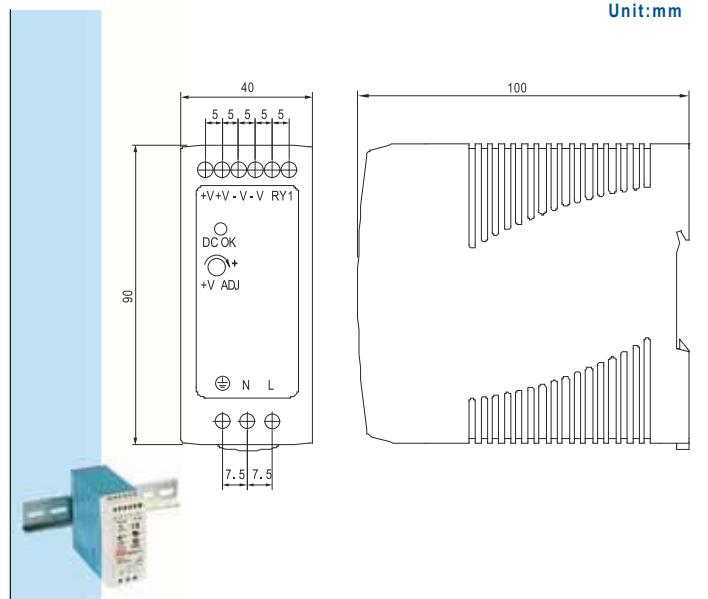


■ 979A(SDR-240)

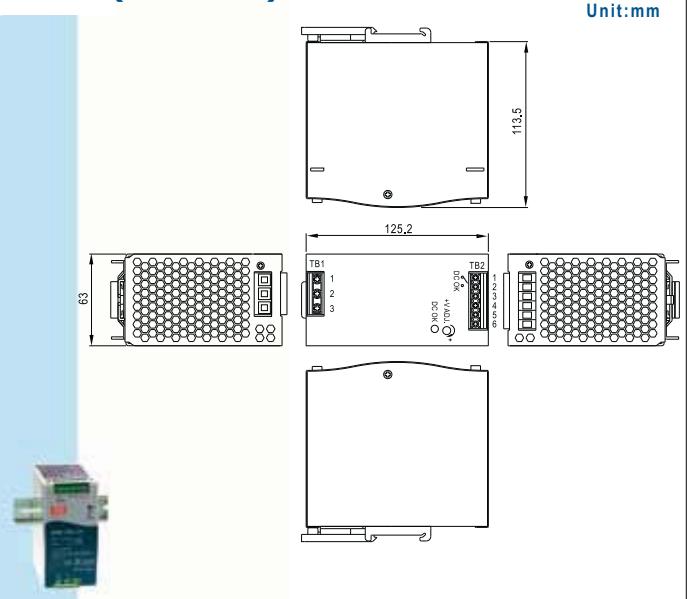

■ 973A (MDR-100)

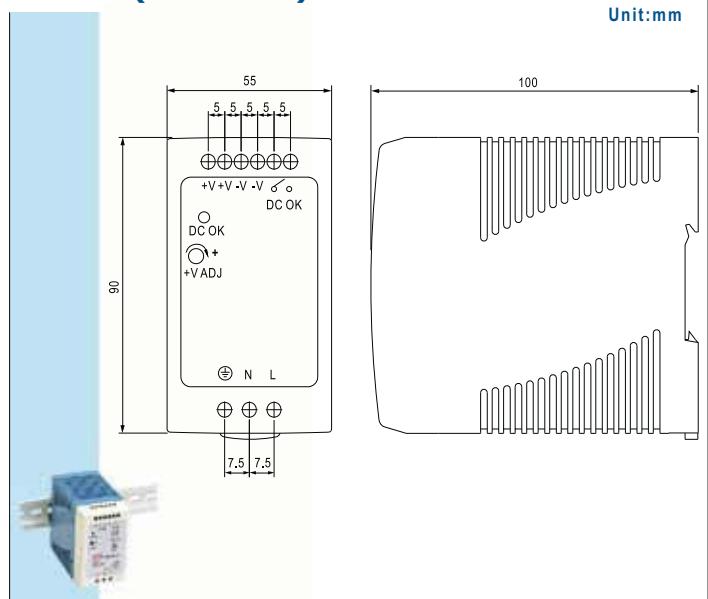


■ 984A (SDR-480)

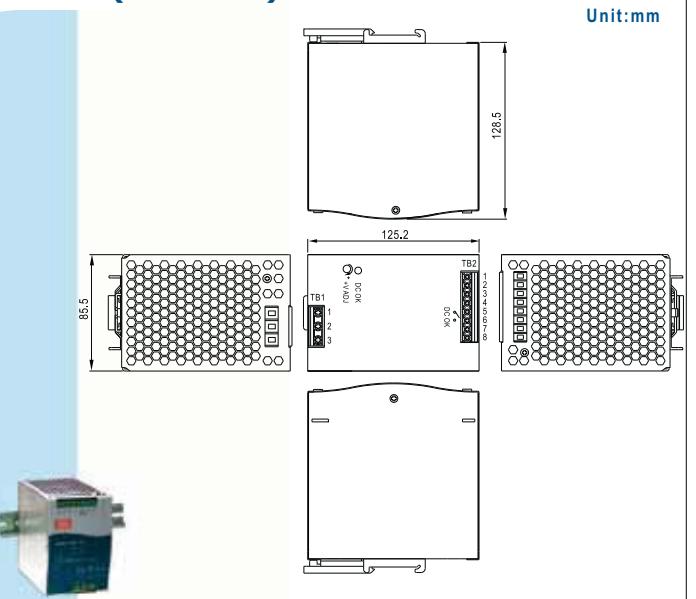


Accessories



DIN Rail Accessories

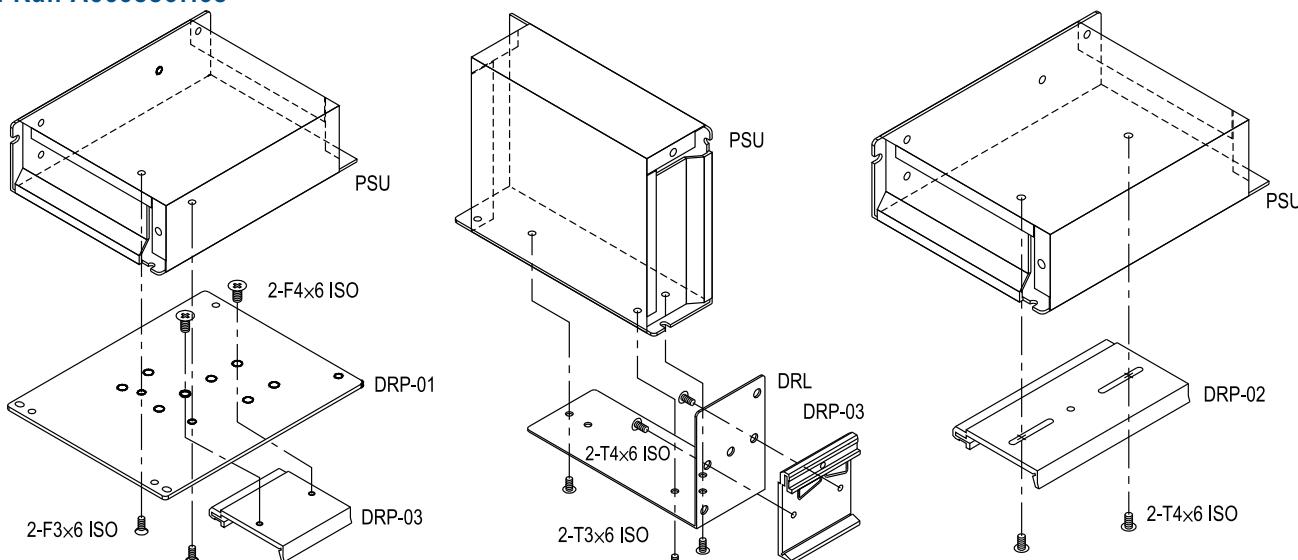

Mounting Accessories

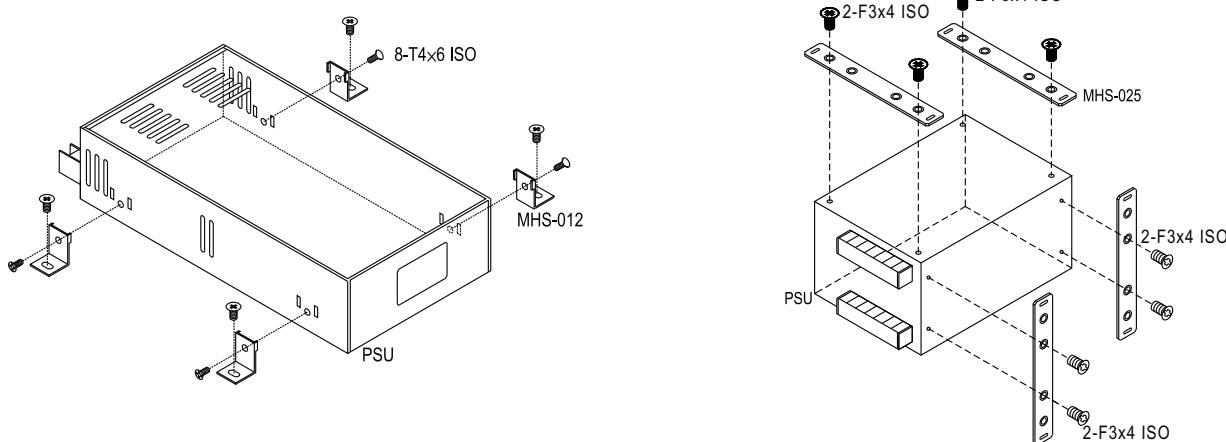

ITEM	Order No.	Case	Model
	DRL-01	903 905 931 932 971	S-40, D-30, T-30, S-15, S-25, RS-25, NES-15 RS-35, NES-25 RS-15
	DRL-02	901 902 906 915 916 920	S-50, S-60, D-60, S-100, S-100F, SD-100, S-150, SD-150, D-120, SP-100, SP-150, SP-200, SP-75,
	DRL-03	911 912	S-240, S-320, SP-320,
	DRL-03A	980 987	SP-240, HRP(G)-300
	DRP-01	901, 902 903, 906 931, 932	All models
	DRP-02	905 / 915 916 / 920 928	S-15, S-25, ... / SP-100, ... SP-150, SP-200, ... / SP-75, ... USP-225,
	DRP-03	DRP-01 DRL-01~03	All models

ITEM	Order No.	Case	Model
	MHS012	206, 207 912, 915 916, 935 939, 940 977, 980 982, 986 987, 995	HDP-190, RSP-200/320, S-201, S-320, S-350, SP-100, SP-150, SP-200, SP-320, SE-450/1000, MP450/650/1000, SP-240, HRP-300/450/600, RSP-2400/3000
	MHS013	919 926	PSP-500, SP-750, SE-600
	MHS014	952	RSP-1000, SD-1000
	MHS025	910	SP-500, PSP-600.....
	MHS026	943	RSP-1500
	MHS027	971 931	RS-15 RS-25
	TBC-05	901 903 905 932	SD-50, S-60 S-40, NES-50, RS-75 S-25, SD-25, NES-35, RS-50 NES-25, RS-35
Cover for terminal block	TBC-07	901 902 903 905 906	D/ID-60, NED/T-75, RD-85, NES-100, RS-100, T-60 S-100F, RD-125, NES-150, RS-150, SD-100, HRP-200 NED/T-50, RD/RID-65, T-40 NED/T-35, RD-50 S-150, SC-150, SD-150
	TBC-08	901 906	AD-155, ADD/ADS-155 D/T/Q-120

General Information

Quotation

- Most of our standard products are available and in stock through our global authorized distributors. Please contact your local distributor for prompt service. Please let us know if you are unable to find Mean Well's distributor information in your local area.
- Written quotations are valid for 60 days from the date quoted unless otherwise specified. Customers are responsible for all banking related charges outside of Taiwan.

Order

- Orders must be placed to Mean Well by mail, e-mail, or fax. Please do not place your order by phone. For international business, Mean Well will provide order confirmations with scheduled delivery dates. If you fail to receive an order confirmation within 2 working days, please reconfirm your order.
- Minimum order amounts per shipment are determined by our local distributor's stock capability. Please contact our sales representative for details.
- We encourage customers to place long-term orders. However, order cancellations or reschedules must be made 45 days prior to the scheduled shipping date.

Delivery

- For our standard products, Mean Well usually keeps around 2-8 weeks safety stock (based on the past 3 months sales record) for prompt delivery of small / medium quantity orders. For large quantity or new product orders, 3-5 weeks lead-time is needed.

Return

- All returned goods must have a RMA (return material authorization) number marked on each carton. Contact Mean Well for a RMA number. All goods must be shipped as "freight prepaid" unless confirmed by our sales representatives.

Warranty

- Products found to be defective within 30 days from the date of receipt can be returned for credit or exchange. After the initial 30 days, Mean Well will repair the goods according to our warranty period. Contact Mean Well for further information on credit or a RMA number. Goods should be shipped as "freight prepaid" to Mean Well and Mean Well will repair and return the defective units (freight prepaid) within 7 working days. If the warranty period has expired, a repair fee (depends on the condition of the product) will be charged.
- If customers do the repair by themselves, Mean Well can provide reasonable quantity of free components for repair purpose.

Attention

- We make every effort to ensure the accuracy of information in the catalog. If there is any discrepancy between the data presented in our catalog and the SPEC, the SPEC sheets should take precedence (please refer to www.meanwell.com for the latest SPEC information). We cannot take any responsibility of any consequence arising due to error or change in specification. We suggest customers conduct a sample test for evaluation and approval before placing a formal order.
- For continuing product improvement, Mean Well reserves the right to revise any information in this catalog without further notification.

The EMC directive applies to component power supplies

- Mean Well ensures that all of the power supplies with CE declaration are designed to meet EMC directives and are verified by an independent certified lab agent with a test report prepared. However, there are 2 categories for power supplies: One is a stand-alone power supply, such as laboratory power supplies which can be tested under EMC individually. The other category is a component power supply such as an enclosed power supply and open PCB power supply. These power supplies are considered a component which will be installed into a final equipment. Since EMC performance is affected by the final installation of a product, Mean Well cannot guarantee that the final equipment will meet EMC directives. Final product manufacturers must re-confirm that their product meets EMC directives.

RoHS Announcement

- To minimize the environmental impact and take more responsibility to the earth we live, MEAN WELL applies manufacturing that complies with Directive 2002/95/EC of the European Parliament - RoHS (Restriction of Hazardous Substances) since Sep. 2005. Please refer to the declaration on our web site for more detail information.